

JKS-400

JKS-400 Information



| Part Number | JKS-400 | |
|--------------|--|--|
| Manufacturer | Eaton | |
| Category | Circuit Protection Electrical, Specialty Fuses | |
| Description | FUSE CYLINDRICAL | |
| Package | Cylindrical, Blade Terminal (Bolt) | |
| | For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com | |



Request a Quote

For Reference Only

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



JKS-400 Specifications

| ManufacturerEatonCategoryCircuit ProtectionElectrical, Specialty FusesPackageCylindrical, Blade Terminal (Bolt)SeriesLimitron? JKSFuse TypeCartridgeCurrent Rating400AVoltage Rating - AC600VVoltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFust SystemCart CartingApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200KAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt) | | |
|---|-----------------------------------|---|
| CategoryCircui ProtectionCategoryCircui ProtectionPackageCylindrical, Specialty FusesPackageCylindrical, Blade Terminal (Bolt)SeriesLimitron? JKSFuse TypeCartridgeCurrent Rating400AVoltage Rating - AC600VVoltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFeatures-ClassJApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200KAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension2.000" Dia x 3.380" L (50.80mm x 85.85mm) | Manufacturer Part Number | JKS-400 |
| Current AsingElectrical, Specialty FusesPackageCylindrical, Blade Terminal (Bolt)SeriesLimitron? JKSFuse TypeCartridgeCurrent Rating400AVoltage Rating - AC600VVoltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFeatures-ClassJApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension2,000" Dia x 3.380" L (50.80mm x 85.85mm) | Manufacturer | Eaton |
| PackageCylindrical, Blade Terminal (Bolt)SeriesLimitron? JKSFuse TypeCartridgeCurrent Rating400AVoltage Rating - AC600VVoltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFeatures-ClassJApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension2,000" Dia x 3.380" L (50.80mm x 85.85mm) | Category | Circuit Protection |
| SeriesLimitron? JKSFuse TypeCartridgeCurrent Rating400AVoltage Rating - AC600VVoltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFeatures-ClassJApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / Case2,000" Dia x 3.380" L (50.80mm x 85.85mm) | | Electrical, Specialty Fuses |
| FunctionEntropy of the second sec | Package | Cylindrical, Blade Terminal (Bolt) |
| Current Rating400ACurrent Rating - AC600VVoltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFeatures-ClassJApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension2.000" Dia x 3.380" L (50.80mm x 85.85mm) | Series | Limitron? JKS |
| Voltage Rating - AC600VVoltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFeatures-ClassJApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension2.000" Dia x 3.380" L (50.80mm x 85.85mm) | Fuse Type | Cartridge |
| Voltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFeatures-ClassJApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension2.000" Dia x 3.380" L (50.80mm x 85.85mm) | Current Rating | 400A |
| Response TimeFastApplicationsElectrical, IndustrialFeatures-ClassJApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension2,000" Dia x 3,380" L (50.80mm x 85.85mm) | Voltage Rating - AC | 600V |
| ApplicationsElectrical, IndustrialFeatures-ClassJApprovalsCE, CSA, ULOperating Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension2.000" Dia x 3.380" L (50.80mm x 85.85mm) | Voltage Rating - DC | - |
| Features-Features-ClassJApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension2.000" Dia x 3.380" L (50.80mm x 85.85mm) | Response Time | Fast |
| ClassJApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension2.000" Dia x 3.380" L (50.80mm x 85.85mm) | Applications | Electrical, Industrial |
| ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension2.000" Dia x 3.380" L (50.80mm x 85.85mm) | Features | - |
| Operating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension2.000" Dia x 3.380" L (50.80mm x 85.85mm) | Class | J |
| Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension2.000" Dia x 3.380" L (50.80mm x 85.85mm) | Approvals | CE, CSA, UL |
| Mounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension2.000" Dia x 3.380" L (50.80mm x 85.85mm) | Operating Temperature | - |
| Package / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension2.000" Dia x 3.380" L (50.80mm x 85.85mm) | Breaking Capacity @ Rated Voltage | 200kA |
| Size / Dimension 2.000" Dia x 3.380" L (50.80mm x 85.85mm) | Mounting Type | Bolt Mount |
| | Package / Case | Cylindrical, Blade Terminal (Bolt) |
| Report errors? | Size / Dimension | 2.000" Dia x 3.380" L (50.80mm x 85.85mm) |
| | | Report errors? |

JKS-400 Guarantees

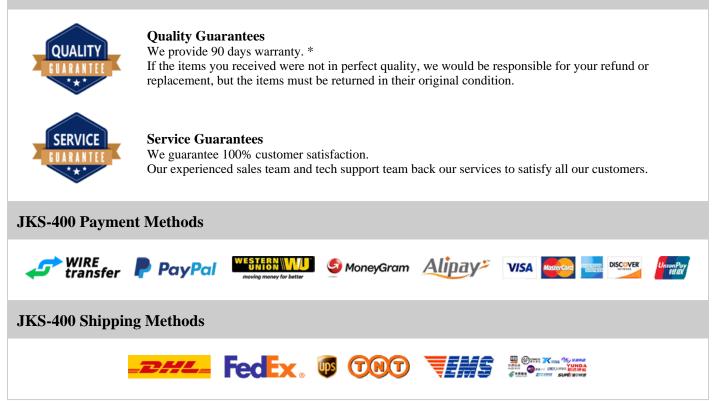

If you have any question about JKS-400, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com