

KAC-60

KAC-60 Information



Part Number	KAC-60	
Manufacturer	Eaton	
Category	Circuit Protection Electrical, Specialty Fuses	
Description	FUSE CYLINDRICAL	
Package	Cylindrical, Blade Terminal (Bolt)	
	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	



Request a Quote

For Reference Only

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



KAC-60 Specifications

ManufacturerEatonCategoryCircuit ProtectionElectrical, Specialty FusesPackageCylindrical, Blade Terminal (Bolt)SeriesKACFuse TypeCatridgeCurrent Rating60AVoltage Rating - AC600VVoltage Rating - DC-Response Time-ApplicationsElectrical, IndustrialFeatures-Class-ApprovalsUROperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.813" Dia x 2.750" L (20.65mm x 69.85mm)		
CategoryCircuit ProtectionElectrical, Specialty FusesPackageCylindrical, Blade Terminal (Bolt)SeriesKACFuse TypeCartridgeCurrent Rating60AVoltage Rating - AC600VVoltage Rating - DC-Response Time-ApplicationsElectrical, IndustrialFeatures-Class-ApprovalsUROperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.813" Dia x 2.750" L (20.65mm x 69.85mm)	Manufacturer Part Number	KAC-60
Current RatingElectrical, Specialty FusesPackageCylindrical, Blade Terminal (Bolt)SeriesKACFuse TypeCartridgeCurrent Rating60AVoltage Rating - AC600VVoltage Rating - DC-Response Time-ApplicationsElectrical, IndustrialFeatures-Class-ApprovalsUROperating Temperature200kABreaking Capacity @ Rated VoltageSolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.813" Dia x 2.750" L (20.65mm x 69.85mm)	Manufacturer	Eaton
PackageCylindrical, Blade Terminal (Bolt)SeriesKACFuse TypeCartridgeCurrent Rating60AVoltage Rating - AC600VVoltage Rating - DC-Response Time-ApplicationsElectrical, IndustrialFeatures-Class-ApprovalsUROperating TypeSolt AnnuBreaking Capacity @ Rated Voltage20kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.813" Dia x 2.750" L (20.65mm x 69.85mm)	Category	Circuit Protection
SeriesKACFuse TypeCartridgeCurrent Rating60AVoltage Rating - AC600VVoltage Rating - DC-Response Time-ApplicationsElectrical, IndustrialFeatures-Class-ApprovalsUROperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.813" Dia x 2.750" L (20.65mm x 69.85mm)		Electrical, Specialty Fuses
Fuse TypeCartridgeCurrent Rating60AVoltage Rating - AC600VVoltage Rating - DC-Response Time-ApplicationsElectrical, IndustrialFeatures-Class-ApprovalsUROperating Temperature200kABreaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.813" Dia x 2.750" L (20.65mm x 69.85mm)	Package	Cylindrical, Blade Terminal (Bolt)
Current Rating60ACurrent Rating - AC600VVoltage Rating - DC-Response Time-ApplicationsElectrical, IndustrialFeatures-Class-ApprovalsUROperating Temperature200kABreaking Capacity @ Rated VoltageBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.813" Dia x 2.750" L (20.65mm x 69.85mm)	Series	KAC
Voltage Rating - AC600VVoltage Rating - DC-Response Time-ApplicationsElectrical, IndustrialFeatures-Class-ApprovalsUROperating Temperature200kABreaking Capacity @ Rated VoltageBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.813" Dia x 2.750" L (20.65mm x 69.85mm)	Fuse Type	Cartridge
Voltage Rating - DC-Response Time-ApplicationsElectrical, IndustrialFeatures-Class-ApprovalsUROperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.813" Dia x 2.750" L (20.65mm x 69.85mm)	Current Rating	60A
Response Time-ApplicationsElectrical, IndustrialFeatures-Class-ApprovalsUROperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.813" Dia x 2.750" L (20.65mm x 69.85mm)	Voltage Rating - AC	600V
ApplicationsElectrical, IndustrialFeatures-Class-ApprovalsUROperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.813" Dia x 2.750" L (20.65mm x 69.85mm)	Voltage Rating - DC	-
Features-Class-ApprovalsUROperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.813" Dia x 2.750" L (20.65mm x 69.85mm)	Response Time	-
Class-ApprovalsUROperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.813" Dia x 2.750" L (20.65mm x 69.85mm)	Applications	Electrical, Industrial
ApprovalsUROperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.813" Dia x 2.750" L (20.65mm x 69.85mm)	Features	-
Operating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.813" Dia x 2.750" L (20.65mm x 69.85mm)	Class	-
Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.813" Dia x 2.750" L (20.65mm x 69.85mm)	Approvals	UR
Mounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.813" Dia x 2.750" L (20.65mm x 69.85mm)	Operating Temperature	-
Package / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.813" Dia x 2.750" L (20.65mm x 69.85mm)	Breaking Capacity @ Rated Voltage	200kA
Size / Dimension 0.813" Dia x 2.750" L (20.65mm x 69.85mm)	Mounting Type	Bolt Mount
	Package / Case	Cylindrical, Blade Terminal (Bolt)
Report errors?	Size / Dimension	0.813" Dia x 2.750" L (20.65mm x 69.85mm)
		Report errors?

KAC-60 Guarantees

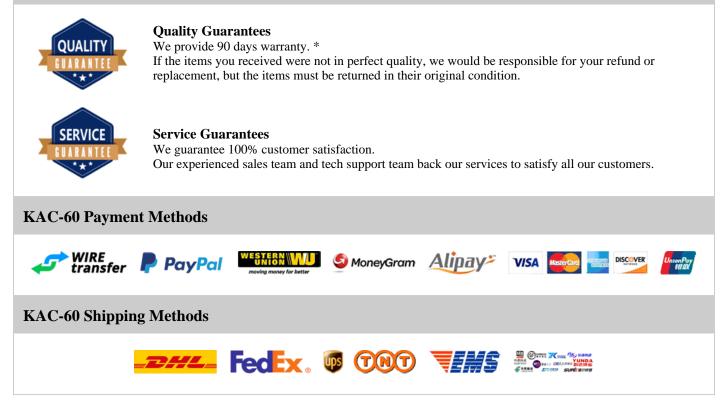

If you have any question about KAC-60, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com