

# **KLM-12**

#### **KLM-12 Information**



Part Number	KLM-12	
Manufacturer	Eaton	
Category	Circuit Protection Electrical, Specialty Fuses	
Description	FUSE CRTRDGE 12A 600VAC/VDC 5AG	
Package	5AG, 10mm x 38.1mm	
	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	



Request a Quote

For Reference Only

### **Certified Quality**


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## **KLM-12 Specifications**

ManufacturerEatonCaregoryCircuit ProtectionElectrical, Specialty FusesPackageSAG, 10mm x 38.1mmSeriesSAG, 10mm x 38.1mmSeriesKLMFuse TypeCartridgeCurrent Rating12AVoltage Rating - AC600VVoltage Rating - DC600VResponse TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage100k AC, 50k A DCPackage / CaseSAG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)		
CategoryCircuit ProtectionElectrical, Specialty FusesPackage5AG, 10mm x 38.1mmSeriesKLMFuse TypeCartridgeCurrent Rating12AVoltage Rating - AC600VVoltage Rating - DC600VResponse TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, CSA, ULOperating Temperature100kA AC, 50kA DCBreaking Capacity @ Rated Voltage5AG, 10mm x 38.10mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Manufacturer Part Number	KLM-12
Current RatingElectrical, Specialty FusesPackage5AG, 10mm x 38.1mmSeriesKLMFuse TypeCartridgeCurrent Rating12AVoltage Rating - AC600VVoltage Rating - DC600VResponse TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, CSA, ULOperating Temperature100kA AC, 50kA DCBreaking Qaacity @ Rated Voltage100kA AC, 50kA DCMounting Type5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Manufacturer	Eaton
Package5AG, 10mm x 38.1mmSeriesKLMFuse TypeCartridgeCurrent Rating12AVoltage Rating - AC600VVoltage Rating - DC600VResponse TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, CSA, ULOperating Type100kA AC, 50kA DCBreaking Capacity @ Rated Voltage100kA AC, 50kA DCPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Category	Circuit Protection
Series KLM   Fuse Type Cartridge   Current Rating 12A   Voltage Rating - AC 600V   Voltage Rating - DC 600V   Response Time Fast   Applications Electrical, Industrial   Features -   Class -   Approvals CE, CSA, UL   Operating Temperature -   Breaking Capacity @ Rated Voltage 100kA AC, 50kA DC   Mounting Type FAG, 10mm x 38.1mm   Package / Case 6406" Dia x 1.500" L (10.30mm x 38.10mm)		Electrical, Specialty Fuses
Fuse TypeCartridgeCurrent Rating12AVoltage Rating - AC600VVoltage Rating - DC600VResponse TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, CSA, ULOperating Temperature100kA AC, 50kA DCBreaking Capacity @ Rated VoltageHolderPackage / CaseSAG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Package	5AG, 10mm x 38.1mm
Current Rating12ACurrent Rating - AC600VVoltage Rating - DC600VResponse TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage100kA AC, 50kA DCMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Series	KLM
Voltage Rating - AC600VVoltage Rating - DC600VResponse TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage100kA AC, 50kA DCMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Fuse Type	Cartridge
Voltage Rating - DC600VResponse TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage100kA AC, 50kA DCMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Current Rating	12A
Response TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage100kA AC, 50kA DCMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Voltage Rating - AC	600V
ApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage100kA AC, 50kA DCMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Voltage Rating - DC	600V
Features-Class-ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage100kA AC, 50kA DCMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Response Time	Fast
Class-ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage100kA AC, 50kA DCMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Applications	Electrical, Industrial
ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage100kA AC, 50kA DCMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Features	-
Operating Temperature-Breaking Capacity @ Rated Voltage100kA AC, 50kA DCMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Class	-
Breaking Capacity @ Rated Voltage100kA AC, 50kA DCMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Approvals	CE, CSA, UL
Mounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Operating Temperature	-
Package / Case 5AG, 10mm x 38.1mm   Size / Dimension 0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Breaking Capacity @ Rated Voltage	100kA AC, 50kA DC
Size / Dimension 0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Mounting Type	Holder
	Package / Case	5AG, 10mm x 38.1mm
Report errors?	Size / Dimension	0.406" Dia x 1.500" L (10.30mm x 38.10mm)
		Report errors?

#### **KLM-12 Guarantees**

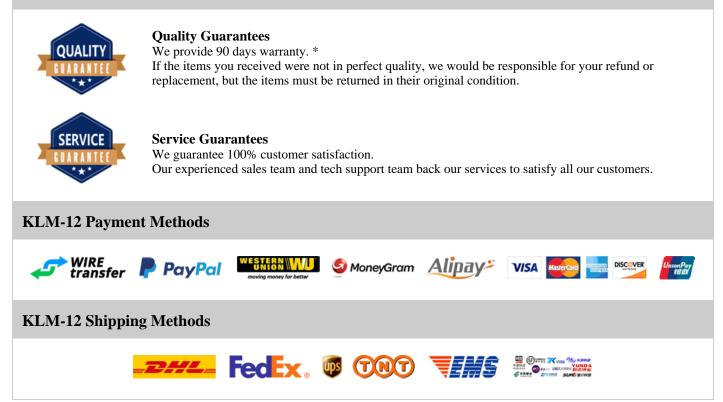

If you have any question about KLM-12, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com