

KTK-9

KTK-9 Information



For Reference Only

Part Number	KTK-9	
Manufacturer	Eaton	
Category	Circuit Protection Electrical, Specialty Fuses	
Description	FUSE CARTRIDGE 9A 600VAC 5AG	
Package	5AG, 10mm x 38.1mm	
	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	



Request a Quote

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



KTK-9 Specifications

ManufacturerEatonCategoryCircuit ProtectionCategoryElectrical, Specialty FusesPackageSAG, 10mm x 38.1mmPackageKTKFuse TypeCartridgeCurrent Rating9AVoltage Rating - AC600VVoltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFustres-Class-ApprovalsCSA, ULOperating Temperature100ABreaking Capacity @ Rated Voltage100AAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mm		
CategoryCircui ProtectionCategoryElectrical, Specialty FusesPackageSAG, 10mm x 38.1mmPackageKTKFuse TypeCartridgeCurrent Rating9AVoltage Rating - AC600VVoltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCSA, ULOperating Temperature100KAMounting TypeHolderPackage / CaseSAG, 10mm x 38.1mmSize / Dimension0.400" Dia x 1.500" L (10.30mm x 38.10mm)	Manufacturer Part Number	KTK-9
ConstructionElectrical, Specialty FusesPackage5AG, 10mm x 38.1mmSeriesKTKFuse TypeCartridgeCurrent Rating9AVoltage Rating - AC600VVoltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCSA, ULOperating Temperature100kABreaking Capacity @ Rated Voltage100kAMounting Type5AG, 10mm x 38.1mmSize / Dimension0,406" Dia x 1.500" L (10.30mm x 38.10mm)	Manufacturer	Eaton
Package5AG, 10mm x 38.1mmSeriesKTKFuse TypeCartridgeFuse TypeOartridgeCurrent Rating9AVoltage Rating - AC600VVoltage Rating - DC-Response TimeFastApplications-Features-Class-ApprovalsCSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage100kAMounting TypeHolderPackage / CaseSAG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Category	Circuit Protection
SeriesKTKFuse TypeCartridgeCurrent Rating9AVoltage Rating - AC600VVoltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCSA, ULOperating Temperature100kABreaking Capacity @ Rated VoltageHolderAutoming TypeSAG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)		Electrical, Specialty Fuses
Fuse TypeCartridgeFuse Type9ACurrent Rating600VVoltage Rating - AC600VVoltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCSA, ULOperating Temperature100KABreaking Capacity @ Rated Voltage100KAMounting Type5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Package	5AG, 10mm x 38.1mm
Current Rating9AVoltage Rating - AC600VVoltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage100kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Series	КТК
Voltage Rating - AC600VVoltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCSA, ULOperating Temperature100kABreaking Capacity @ Rated VoltageHolderMounting Type5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Fuse Type	Cartridge
Voltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage100kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Current Rating	9A
Response TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage100kAMounting TypeHolderPackage / CaseSAG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Voltage Rating - AC	600V
ApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage100kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Voltage Rating - DC	-
InInFeatures-Class-ApprovalsCSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage100kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Response Time	Fast
Class-ApprovalsCSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage100kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Applications	Electrical, Industrial
ApprovalsCSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage100kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Features	-
Operating Temperature-Breaking Capacity @ Rated Voltage100kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Class	-
Breaking Capacity @ Rated Voltage100kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Approvals	CSA, UL
Mounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Operating Temperature	-
Package / Case 5AG, 10mm x 38.1mm Size / Dimension 0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Breaking Capacity @ Rated Voltage	100kA
Size / Dimension 0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Mounting Type	Holder
	Package / Case	5AG, 10mm x 38.1mm
Report errors?	Size / Dimension	0.406" Dia x 1.500" L (10.30mm x 38.10mm)
		Report errors?

KTK-9 Guarantees

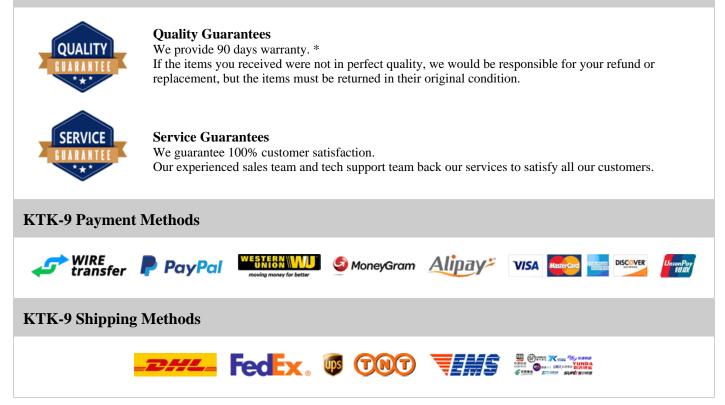

If you have any question about KTK-9, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com