

# LP-30-400

#### LP-30-400 Information



Part Number	LP-30-400	
Manufacturer	Signal Transformer	
Category	Transformers Power Transformers	
Description	XFRMR SEMI-TORO 12VA THRU HOLE	
Package	-	
	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	



Request a Quote

For Reference Only

## **Certified Quality**


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



### **LP-30-400 Specifications**

CategoryTransformersPower TransformersPackage-SeriesLPTypeSemi-ToroidalVoltage - PrimarySeni-ToroidalVoltage - Secondary (Full Load)Parallel 15V, Series 30VOutrent - Output (Max)Parallel 800mA, Series 400mAPrimary Winding(s)DualSecondary Winding(s)DualPower - Max12 VAPower - MaxSeries 100Mounting TypePrinagh HoleSize / DimensionScomm L x 50.80mm WSize / DimensionScomm L x 50.80mm WHeight - Seated (Max)Scomm L x 50.80mm WWoltage - IsolationScomm L x 50.80mm WWeightScomm L x 50.80mm W	Manufacturer Part Number	LP-30-400
Power TransformersPackage-SeriesLPTypeSemi-ToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 15V, Series 30VCurrent - Output (Max)Parallel 800mA, Series 400mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleSize / Dinension63.50mm L x 50.80mm WHeight - Seated (Max)500VrmsVoltage - Isolation1500VrmsWeight0.688 lb (312.07g)	Manufacturer	Signal Transformer
Package-SeriesLPTypeSemi-ToroidalVoltage - PrimaryIst7, 230VVoltage - Secondary (Full Load)Parallel 15V, Series 30VCurrent - Output (Max)Parallel 800mA, Series 400mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - MaxIstVAMounting TypeFrinough HoleTermination StyleSconm L x 50.80mm WSteir / DimensionStorm L x 50.80mm WNotage - IsolationStorm L x 50.80mm WWidtage - IsolationStorm Sum Sum Sum Sum Sum Sum Sum Sum Sum Su	Category	Transformers
SeriesLPTypeSemi-ToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 15V, Series 30VCurrent - Output (Max)Parallel 800mA, Series 400mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleTermination Style63.50mm L x 50.80mm WSize / Dimension7.10mmHeight - Seated (Max)1500VrmsWeight0.688 lb (312.07g)		Power Transformers
TypeSemi-ToroidalTypeSemi-ToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 15V, Series 30VCurrent - Output (Max)Parallel 800mA, Series 400mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleTermination Style63.50mm L x 50.80mm WSize / Dimension57.10mmVoltage - Isolation1500VrmsWeight0.688 lb (312.07g)	Package	-
Yoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 15V, Series 30VCurrent - Output (Max)Parallel 800mA, Series 400mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleTermination Style63.50mm L x 50.80mm WSize / Dimension52.710mmHeight - Seated (Max)27.10mmWoitge - Isolation1500VrmsWeight0.688 lb (312.07g)	Series	LP
Voltage - Secondary (Full Load)Parallel 15V, Series 30VCurrent - Output (Max)Parallel 800mA, Series 400mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleTermination Style63.50mm L x 50.80mm WSize / Dimension1500VrmsHeight - Seated (Max)1500VrmsWoltage - Isolation0.688 lb (312.07g)	Туре	Semi-Toroidal
Current - Output (Max)Parallel 800mA, Series 400mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension63.50mm L x 50.80mm WHeight - Seated (Max)27.10mmVoltage - Isolation1500VrmsWeight0.688 lb (312.07g)	Voltage - Primary	115V, 230V
Primary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension63.50mm L x 50.80mm WHeight - Seated (Max)27.10mmVoltage - Isolation1500VrmsWeight0.688 lb (312.07g)	Voltage - Secondary (Full Load)	Parallel 15V, Series 30V
Secondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleTermination Style9C PinSize / Dimension63.50mm L x 50.80mm WHeight - Seated (Max)27.10mmVoltage - Isolation1500VrmsWeight0.688 lb (312.07g)	Current - Output (Max)	Parallel 800mA, Series 400mA
Center TapNoPower - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension63.50mm L x 50.80mm WHeight - Seated (Max)27.10mmVoltage - Isolation1500VrmsWeight0.688 lb (312.07g)	Primary Winding(s)	Dual
Power - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension63.50mm L x 50.80mm WHeight - Seated (Max)27.10mmVoltage - Isolation1500VrmsWeight0.688 lb (312.07g)	Secondary Winding(s)	Dual
Mounting TypeThrough HoleTermination StylePC PinSize / Dimension63.50mm L x 50.80mm WHeight - Seated (Max)27.10mmVoltage - Isolation1500VrmsWeight0.688 lb (312.07g)	Center Tap	No
Termination StylePC PinSize / Dimension63.50mm L x 50.80mm WHeight - Seated (Max)27.10mmVoltage - Isolation1500VrmsWeight0.688 lb (312.07g)	Power - Max	12 VA
Size / Dimension 63.50mm L x 50.80mm W   Height - Seated (Max) 27.10mm   Voltage - Isolation 1500Vrms   Weight 0.688 lb (312.07g)	Mounting Type	Through Hole
Height - Seated (Max)27.10mmVoltage - Isolation1500VrmsWeight0.688 lb (312.07g)	Termination Style	PC Pin
Voltage - Isolation1500VrmsWeight0.688 lb (312.07g)	Size / Dimension	63.50mm L x 50.80mm W
Weight 0.688 lb (312.07g)	Height - Seated (Max)	27.10mm
	Voltage - Isolation	1500Vrms
Report errors?	Weight	0.688 lb (312.07g)
		Report errors?

#### LP-30-400 Guarantees

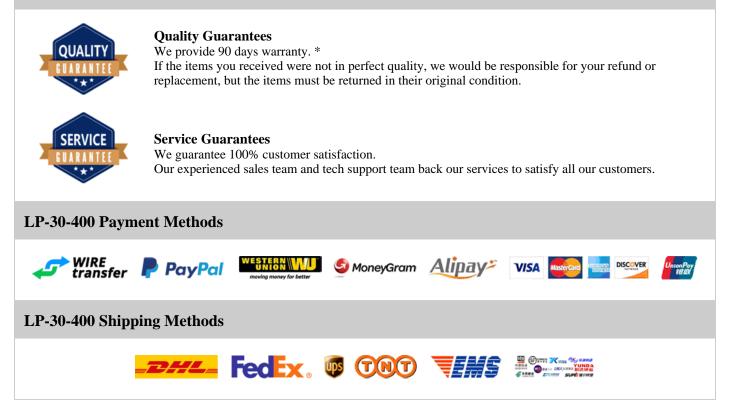

If you have any question about LP-30-400, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com