

LP-88-65

LP-88-65 Information



Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



LP-88-65 Specifications

ManufacturerSignal TransformerCategoryTransformersPackage-Package-SeriesLPTypeSemi-ToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 44V, Series 88VCurrent - Output (Max)Parallel 130mA, Series 65mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max6 VAMounting TypePC PinSize / Dimension47.50mm L x 39.60mm WHeight - Seated (Max)1500Vrms		
CategoryTansformersPower TransformersPackagePackageSeriesLPTypeSemi-ToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 44V, Series 88VCurrent - Output (Max)Parallel 130mA, Series 65mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max6 VAMounting TypeThrough HoleSize / Dimension47.50mm L x 39.60mm WHeight - Seated (Max)500VrmsWoight1500Vrms	Manufacturer Part Number	LP-88-65
InterfactPower TransformersPackage-SeriesLPTypeSemi-ToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 44V, Series 88VCurrent - Output (Max)Parallel 130mA, Series 65mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max6 VAMounting TypeThrough HoleSize / Dimension21.60mm Lx 39.60mm WHeight - Seated (Max)1500VrmsWeight0.438 lb (198.67g)	Manufacturer	Signal Transformer
Package	Category	Transformers
SeriesLPTypeSemi-ToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 44V, Series 88VCurrent - Output (Max)Parallel 130mA, Series 65mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max6 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension21.60mm WHeight - Seated (Max)500VrmsWeight0.438 lb (198.67g)		Power Transformers
TypeSemi-ToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 44V, Series 88VCurrent - Output (Max)Parallel 130mA, Series 65mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max6 VAMounting TypeThrough HoleTermination Style9C PinSize / Dimension21.60mm L x 39.60mm WVoltage - Isolation1500VrmsWeight0.438 lb (198.67g)	Package	-
Yoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 44V, Series 88VCurrent - Output (Max)Parallel 130mA, Series 65mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max6 VAMounting TypeThrough HoleTermination Style9C PinSize / Dimension21.60mm L x 39.60mm WHeight - Seated (Max)1500VrmsWoitge - Isolation0.438 lb (198.67g)	Series	LP
Voltage - Secondary (Full Load)Parallel 44V, Series 88VCurrent - Output (Max)Parallel 130mA, Series 65mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max6 VAMounting TypeThrough HoleTermination Style9C PinSize / Dimension47.50mm L x 39.60mm WHeight - Seated (Max)1500VrmsVoltage - Isolation0.438 lb (198.67g)	Туре	Semi-Toroidal
Current - Output (Max)Parallel 130mA, Series 65mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max6 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension47.50mm L x 39.60mm WHeight - Seated (Max)1500VrmsVoltage - Isolation0.438 lb (198.67g)	Voltage - Primary	115V, 230V
Primary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max6 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension47.50mm L x 39.60mm WHeight - Seated (Max)1500VrmsVoltage - Isolation1500VrmsWeight0.438 lb (198.67g)	Voltage - Secondary (Full Load)	Parallel 44V, Series 88V
Secondary Winding(s)DualCenter TapNoPower - Max6 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension47.50mm L x 39.60mm WHeight - Seated (Max)21.60mmVoltage - Isolation1500VrmsWeight0.438 lb (198.67g)	Current - Output (Max)	Parallel 130mA, Series 65mA
Center TapNoPower - Max6 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension47.50mm L x 39.60mm WHeight - Seated (Max)21.60mmVoltage - Isolation1500VrmsWeight0.438 lb (198.67g)	Primary Winding(s)	Dual
Power - Max6 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension47.50mm L x 39.60mm WHeight - Seated (Max)21.60mmVoltage - Isolation1500VrmsWeight0.438 lb (198.67g)	Secondary Winding(s)	Dual
Mounting TypeThrough HoleTermination StylePC PinSize / Dimension47.50mm L x 39.60mm WHeight - Seated (Max)21.60mmVoltage - Isolation1500VrmsWeight0.438 lb (198.67g)	Center Tap	No
Termination StylePC PinSize / Dimension47.50mm L x 39.60mm WHeight - Seated (Max)21.60mmVoltage - Isolation1500VrmsWeight0.438 lb (198.67g)	Power - Max	6 VA
Size / Dimension 47.50mm L x 39.60mm W Height - Seated (Max) 21.60mm Voltage - Isolation 1500Vrms Weight 0.438 lb (198.67g)	Mounting Type	Through Hole
Height - Seated (Max)21.60mmVoltage - Isolation1500VrmsWeight0.438 lb (198.67g)	Termination Style	PC Pin
Voltage - Isolation1500VrmsWeight0.438 lb (198.67g)	Size / Dimension	47.50mm L x 39.60mm W
Weight 0.438 lb (198.67g)	Height - Seated (Max)	21.60mm
-	Voltage - Isolation	1500Vrms
Report errors?	Weight	0.438 lb (198.67g)
		Report errors?

LP-88-65 Guarantees

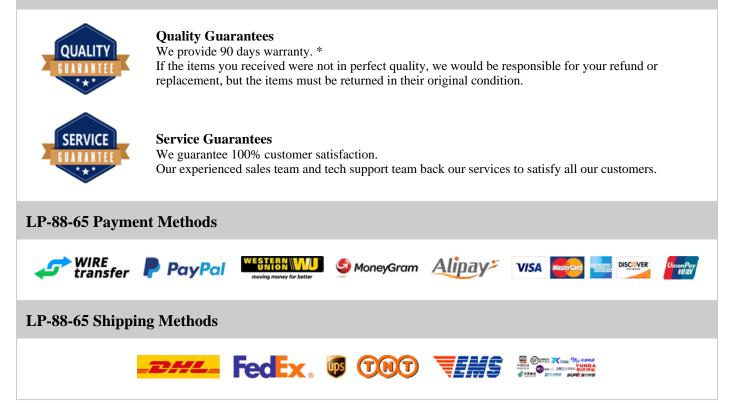

If you have any question about LP-88-65, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com