

LPPB282CFFN-RC

LPPB282CFFN-RC Information

		LPPB282CFFN-RC	
	Manufacturer	Sullins Connector Solutions	
	Category	Connectors, Interconnects	
Heisener.com		Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	CONN HEADER .050" 56POS	
	Package	-	
For Reference Only		For the pricing/inventory/lead time, please contact	
		us	
		Website: https://www.heisener.com	Request a Quote
		E-mail: salesdept@heisener.com	

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



LPPB282CFFN-RC Specifications

Manufacturer Part NumberLPPB282CFFN-RCManufacturerSullins Connector SolutionsCategoryConnectors SolutionsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series-Connector TypeHeaderContact TypeBoardSolutions LoadedSolosNumber of Positions LoadedAlNumber of Rows2Rowspacing - MatingSolos' (1.27mm)Number of RowsSolorRowspacing - MatingSolos' (1.27mm)Mounting TypePan-PullStolart Finish - MatingSolos' (1.27mm)Contact Finish - MatingSolos' (1.27mm)Stolart Finish - MatingSolos' (1.27mm)Stolart Finish - MatingSolos' (1.27mm)Stolart Finish - MatingSolos' (1.27mm)Stolart Finish - MatingSolos' (1.27mm)Contact Finish - MatingSolos' (1.27mm)Stolart F				
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series-Connector TypeHeaderContact TypeHeaderContact TypeBoard to BoardStyleBoard to BoardNumber of Positions56Number of Positions LoadedAllNumber of Rows2Row Spacing - Mating0,50° (1.27mm)Number of Rows0,50° (1.27mm)Number of Rows2Row Spacing - Mating0,50° (1.27mm)Nounting TypeThrough HoleFreminationSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Fleight0,17″ (4.50mm)Insulation Fleight0,118° (3.00mm)Operating Temperature-40° C 21S°C	Manufacturer Part Number	LPPB282CFFN-RC		
Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series-Connector TypeHeaderContact TypeFemale SocketStyleBoard to BoardNumber of Positions56Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeThrough HoleTerminationSolderFastening TypeOusf - PullContact Finish - MatingGoldContact Finish Thickness - MatingHashInsulation ColorBlackInsulation Height0.118" (3.00mm)Operating Temperature40°C ~ 125°C	Manufacturer	Sullins Connector Solutions		
Package-Series-Connector TypeHeaderContact TypeFemale SocketStyleBoard to BoardNumber of Positions56Number of Positions LoadedAllPitch - Mating0.050° (1.27mm)Number of Rows2Row Spacing - Mating0.050° (1.27mm)Mounting Type0.050° (1.27mm)Young TypeSolderTerminationSolderFastening TypeGoldContact Finish - MatingGoldContact Finish Thickness - MatingHashInsulation ColorHashInsulation Height0.17° (4.50mm)Contact Length - Post0.118° (3.00mm)Operating Temperature40°C ~ 125°C	Category	Connectors, Interconnects		
Series-Connector TypeHeaderContact TypeFemale SocketStyleBoard to BoardNumber of Positions56Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeThrough HoleTerminationSolderFastening TypeOldContact Finish - MatingGoldInsulation ColorHashInsulation Finish - MatingBiackInsulation Height0.118" (3.00mm)Operating Temperature40°C ~ 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets		
Connector TypeHeaderContact TypeFemale SocketStyleBoard to BoardNumber of Positions56Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeThrough HoleTerminationSolderFastening TypeSolderContact Finish - MatingGoldInsulation ColorHaskInsulation Height0.17" (4.50mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-40°C ~ 125°C	Package	-		
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions56Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.17" (4.50mm)Contact Length - Post0.118" (3.00mm)Operating Temperature40°C ~ 125°C	Series	-		
StyleBoard to BoardNumber of Positions56Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting Type0.050" (1.27mm)Mounting TypeSolderTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post0.118" (3.00mm)Operating Temperature40°C ~ 125°C	Connector Type	Header		
Number of Positions 56 Number of Positions Loaded All Pitch - Mating 0.050" (1.27mm) Number of Rows 2 Row Spacing - Mating 0.050" (1.27mm) Mounting Type 0.050" (1.27mm) Mounting Type Onson" (1.27mm) Termination 0.050" (1.27mm) Fastening Type Push-Pull Contact Finish - Mating Gold Contact Finish Thickness - Mating Flash Insulation Color Black Insulation Height 0.177" (4.50mm) Contact Length - Post 0.118" (3.00mm) Operating Temperature 40°C ~ 125°C	Contact Type	Female Socket		
Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation Color0.118" (3.00mm)Operating Temperature40°C ~ 125°C	Style	Board to Board		
Pitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting Type0.050" (1.27mm)TerminationThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation Color0.177" (4.50mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-40°C ~ 125°C	Number of Positions	56		
Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-40°C ~ 125°C	Number of Positions Loaded	All		
Row Spacing - Mating0.050" (1.27mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-40°C ~ 125°C	Pitch - Mating	0.050" (1.27mm)		
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post0.118" (3.00mm)Operating Temperature40°C ~ 125°C	Number of Rows	2		
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post0.118" (3.00mm)Operating Temperature40°C ~ 125°C	Row Spacing - Mating	0.050" (1.27mm)		
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post0.118" (3.00mm)Operating Temperature40°C ~ 125°C	Mounting Type	Through Hole		
Contact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-40°C ~ 125°C	Termination	Solder		
Contact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-40°C ~ 125°C	Fastening Type	Push-Pull		
Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-40°C ~ 125°C	Contact Finish - Mating	Gold		
Insulation Height 0.177" (4.50mm) Contact Length - Post 0.118" (3.00mm) Operating Temperature -40°C ~ 125°C	Contact Finish Thickness - Mating	Flash		
Contact Length - Post0.118" (3.00mm)Operating Temperature-40°C ~ 125°C	Insulation Color	Black		
Operating Temperature $-40^{\circ}\text{C} \sim 125^{\circ}\text{C}$	Insulation Height	0.177" (4.50mm)		
	Contact Length - Post	0.118" (3.00mm)		
	Operating Temperature	-40°C ~ 125°C		
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0		

Contact Finish - Post	Gold	
Mated Stacking Heights	-	
Ingress Protection	-	
Features	-	
		Report errors?





Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

LPPB282CFFN-RC Payment Methods

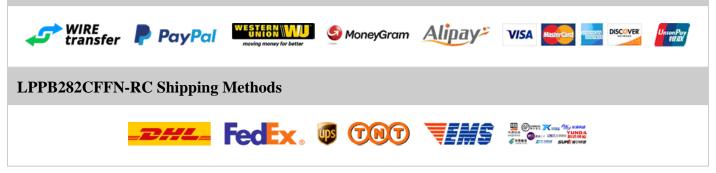

If you have any question about LPPB282CFFN-RC, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com