

# LPPB502NFSS-RC

### LPPB502NFSS-RC Information

	Imber LPPB502NFSS-RC   Icturer Sullins Connector Solutions   Y Connectors, Interconnects	
www.horener.com	Rectangular Connectors - Headers, Receptacles, Female Sockets	
Descrip	tion CONN HEADR .050" 100PS DL SMD AU	
Package	e -	回波武振
	For the pricing/inventory/lead time, please contact	
For Reference Only	us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

## **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## LPPB502NFSS-RC Specifications

Manufacturer Part NumberLPPB502NFSS-RCManufacturerSullins Connector SolutionsCategoryConnectors SolutionsCategoryRectangular ConnectosPackage-Series-Connector TypeHeader, Top or Bottom EntryContact TypeSocketStyleBoard to BoardNumber of Positions100Number of Positions LoadedAllNumber of Rows2Row Spacing - Mating0.050° (1.27mm)Mounting TypeSurface MountMounting TypeSolderFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldStation ColorBack				
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series-Connector TypeHeader, Top or Bottom EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions00Number of Positions LoadedAllPitch - Mating0.50° (1.27mm)Number of Rows2Row Spacing - Mating0.50° (1.27mm)Mounting TypeSurface MountFreminationSolderFreminationSolderForther String TypeGoldContact Finish - MatingGoldContact Finish - MatingFinaleInsulation ColorFinaleBackSurface MountString TypeBack	Manufacturer Part Number	LPPB502NFSS-RC		
ActageRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series-Connector TypeHeader, Top or Bottom EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions100Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountFerminationSolderFastening TypePush-PullContact Finish - MatingGoldIonatter Finish Thickness - MatingFlashInsulation ColorBlack	Manufacturer	Sullins Connector Solutions		
Package-Series-Connector TypeHeader, Top or Bottom EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions100Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountFastening TypeSolderFastening TypeGoldContact Finish - MatingGoldIonater Finish Thickness - MatingFiashInsulation ColorBlack	Category	Connectors, Interconnects		
Series-Connector TypeHeader, Top or Bottom EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions100Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlack		Rectangular Connectors - Headers, Receptacles, Female Sockets		
Connector TypeHeader, Top or Bottom EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions100Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingBack	Package	-		
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions100Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSolderFastening TypeSolderFastening TypeGoldContact Finish - MatingGoldIonact Finish Thickness - MatingBlack	Series	-		
StyleBoard to BoardNumber of Positions100Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldIonater Finish Thickness - MatingFlashBlackBlack	Connector Type	Header, Top or Bottom Entry		
Number of Positions100Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldKontact Finish Thickness - MatingFiashBackBlack	Contact Type	Female Socket		
Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlack	Style	Board to Board		
Pitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldFontact Finish Thickness - MatingFlashBackBlack	Number of Positions	100		
Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlack	Number of Positions Loaded	All		
Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldFontact Finish Thickness - MatingFlashInsulation ColorBlack	Pitch - Mating	0.050" (1.27mm)		
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlack	Number of Rows	2		
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlack	Row Spacing - Mating	0.050" (1.27mm)		
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlack	Mounting Type	Surface Mount		
Contact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlack	Termination	Solder		
Contact Finish Thickness - MatingFlashInsulation ColorBlack	Fastening Type	Push-Pull		
Insulation Color Black	Contact Finish - Mating	Gold		
	Contact Finish Thickness - Mating	Flash		
Insulation Height 0.183" (4.65mm)	Insulation Color	Black		
	Insulation Height	0.183" (4.65mm)		
Contact Length - Post -	Contact Length - Post	-		
Operating Temperature $-40^{\circ}\text{C} \sim 125^{\circ}\text{C}$	Operating Temperature	-40°C ~ 125°C		
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0		

Contact Finish - Post	Gold	
Mated Stacking Heights	-	
Ingress Protection	-	
Features	-	
		Report errors?

### LPPB502NFSS-RC Guarantees



#### **Quality Guarantees**


We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

### LPPB502NFSS-RC Payment Methods

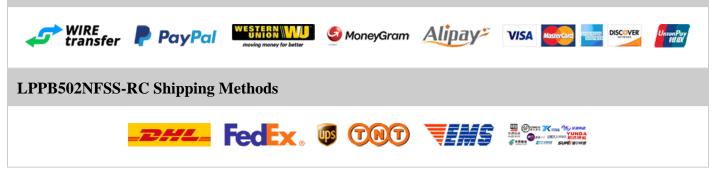

If you have any question about LPPB502NFSS-RC, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com