

LPS65

LPS65 Information

	Part Number Manufacturer Category Description Package	LPS65 Artesyn Embedded Technologies Power Supplies - External/Internal (Off-Board) AC DC Converters AC/DC CONVERTER 24V 60W - For the pricing/inventory/lead time, please contact	
For Reference Only		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



LPS65 Specifications

ManufacturerArtesyn Embedded TechnologiesCategoryPower Supplies - External/Internal (Off-Board)AC DC ConvertersPackage-SeriesLPS60TypeOpen FrameNumber of Outputs1Voltage - Input85 ~ 264 VACVoltage - Output 124VVoltage - Output 2-Voltage - Output 3-Voltage - Output 4-Voltage - Output 560W (80W Forced Air)Voltage - Solation-Preference70%Operating Temperature0°C ~ 70°C (With Derating)FeaturesAdjustabe Output, DC Input Capable, Remote Sense, Universal InputMounting TypeSon" Lx 3.00" W x 1.69" H (127.0mm x 76.2mm x 42.9mm)	-		
Act Dec Converters Package - Series LPS60 Number of Outputs 0pen Frame Voltage - Input 85 ~ 264 VAC Voltage - Output 1 24V Voltage - Output 2 - Voltage - Output 3 - Voltage - Output 4 - Voltage - Solation - Power (Watts) 60W (80W Forced Air) Voltage - Isolation - Voltage - Isolation - Efficiency 70% Operating Temperature Odiyustable Output, De Input Capable, Remote Sense, Universal Input Features Adjustable Output, DCInput Capable, Remote Sense, Universal Input <tr< td=""><td>Manufacturer Part Number</td><td>LPS65</td><td></td></tr<>	Manufacturer Part Number	LPS65	
AC DC ConvertersPackage-PackageLPS60StriesDen FrameNumber of Outputs1Voltage - Input85 ~ 264 VACVoltage - Output 155 ~ 264 VACVoltage - Output 2-Voltage - Output 3-Voltage - Output 4-Voltage - Output 5-Voltage - Soltage-Voltage - Soltage-	Manufacturer	Artesyn Embedded Technologies	
Package-SeriesLPS60TypeOpen FrameNumber of Outputs1Voltage - Input85 ~ 264 VACVoltage - Output 124VVoltage - Output 2-Voltage - Output 3-Voltage - Output 4-Voltage - Output 4-Voltage - Output 4-Voltage - Output 560W (80W Forced Air)Power (Watts)60W (80W Forced Air)ApplicationsITE (Commercial)Voltage - Isolation-Efficiency0%Operating TemperatureO/C ~ 70°C (With Derating)FeaturesAdjustable Output, DC Input Capable, Remote Sense, Universal InputMounting TypeS.00" L x 3.00" W x 1.69" H (127.0mm x 76.2mm x 42.9mm)	Category	Power Supplies - External/Internal (Off-Board)	
SeriesLPS60TypeOpen FrameNumber of Outputs1Voltage - Input85 ~ 264 VACVoltage - Output 124VVoltage - Output 2-Voltage - Output 3-Voltage - Output 4-Current - Output (Max)2.5APower (Watts)60W (80W Forced Air)Voltage - Isolation-Voltage - Isolation-Porent (Max)0°C ~ 70°C (With Derating)Porenting Temperature0°C ~ 70°C (With Derating)FeaturesAdjustable Output, DC Input Capable, Remote Sense, Universal InputMounting Type5.00° "L x 3.00" W x 1.69" H (127.0mm x 76.2mm x 42.9mm)		AC DC Converters	
Type Open Frame Number of Outputs 1 Voltage - Input 85 ~ 264 VAC Voltage - Output 1 24V Voltage - Output 2 - Voltage - Output 3 - Voltage - Output 4 - Voltage - Output 5 - Voltage - Output 6 - Voltage - Solation - Voltage - Isolation - Voltage - Isola	Package	-	
Number of Outputs I Voltage - Input 85 ~ 264 VAC Voltage - Output 1 24V Voltage - Output 2 - Voltage - Output 3 - Voltage - Output 4 - Voltage - Output 4 - Current - Output (Max) 2.5A Power (Watts) 60W (80W Forced Air) Applications ITE (Commercial) Voltage - Isolation - Efficiency 70% Operating Temperature 0°C ~ 70°C (With Derating) Features Adjustable Output, DC Input Capable, Remote Sense, Universal Input Mounting Type Chassis Mount Size / Dimension 5.00" L x 3.00" W x 1.69" H (127.0mm x 76.2mm x 42.9mm)	Series	LPS60	
Voltage - Input 85 ~ 264 VAC Voltage - Output 1 24V Voltage - Output 2 - Voltage - Output 3 - Voltage - Output 4 - Voltage - Output 4 - Current - Output (Max) 2.5A Power (Watts) 60W (80W Forced Air) Applications ITE (Commercial) Voltage - Isolation - Efficiency 70% Operating Temperature 0°C ~ 70°C (With Derating) Features Adjustable Output, DC Input Capable, Remote Sense, Universal Input Mounting Type Chassis Mount Size / Dimension 5.00" L x 3.00" W x 1.69" H (127.0mm x 76.2mm x 42.9mm)	Туре	Open Frame	
Voltage - Output 1 24V Voltage - Output 2 - Voltage - Output 3 - Voltage - Output 4 - Current - Output (Max) 2.5A Power (Watts) 60W (80W Forced Air) Applications ITE (Commercial) Voltage - Isolation - Efficiency 70% Operating Temperature 0°C ~ 70°C (With Derating) Features Adjustable Output, DC Input Capable, Remote Sense, Universal Input Mounting Type 5.00" L x 3.00" W x 1.69" H (127.0mm x 76.2mm x 42.9mm)	Number of Outputs	1	
Voltage - Output 2 - Voltage - Output 3 - Voltage - Output 4 - Current - Output (Max) 2.5A Power (Watts) 60W (80W Forced Air) Applications ITE (Commercial) Voltage - Isolation - Efficiency 70% Operating Temperature O°C ~ 70°C (With Derating) Features Adjustable Output, DC Input Capable, Remote Sense, Universal Input Mounting Type 5.00" L x 3.00" W x 1.69" H (127.0mm x 76.2mm x 42.9mm)	Voltage - Input	85 ~ 264 VAC	
Voltage - Output 3 - Voltage - Output 4 - Current - Output (Max) 2.5A Power (Watts) 60W (80W Forced Air) Applications ITE (Commercial) Voltage - Isolation - Efficiency 70% Operating Temperature 0°C ~ 70°C (With Derating) Features Adjustable Output, DC Input Capable, Remote Sense, Universal Input Mounting Type Chassis Mount Size / Dimension 5.00" L x 3.00" W x 1.69" H (127.0mm x 76.2mm x 42.9mm)	Voltage - Output 1	24V	
Voltage - Output 4-Current - Output (Max)2.5APower (Watts)60W (80W Forced Air)ApplicationsITE (Commercial)Voltage - Isolation-Efficiency70%Operating Temperature0°C ~ 70°C (With Derating)FeaturesAdjustable Output, DC Input Capable, Remote Sense, Universal InputMounting Type5.00" L x 3.00" W x 1.69" H (127.0mm x 76.2mm x 42.9mm)	Voltage - Output 2	-	
Current - Output (Max)2.5APower (Watts)60W (80W Forced Air)ApplicationsITE (Commercial)Voltage - Isolation-Efficiency70%Operating Temperature0°C ~ 70°C (With Derating)PeaturesAdjustable Output, DC Input Capable, Remote Sense, Universal InputMounting TypeChassis MountSize / Dimension5.00" L x 3.00" W x 1.69" H (127.0mm x 76.2mm x 42.9mm)	Voltage - Output 3	-	
Power (Watts)60W (80W Forced Air)ApplicationsITE (Commercial)Voltage - Isolation-Efficiency70%Operating Temperature0°C ~ 70°C (With Derating)FeaturesAdjustable Output, DC Input Capable, Remote Sense, Universal InputMounting TypeChassis MountSize / Dimension5.00" L x 3.00" W x 1.69" H (127.0mm x 76.2mm x 42.9mm)	Voltage - Output 4	-	
ApplicationsITE (Commercial)Voltage - Isolation-Efficiency70%Operating Temperature0°C ~ 70°C (With Derating)FeaturesAdjustable Output, DC Input Capable, Remote Sense, Universal InputMounting TypeChassis MountSize / Dimension5.00" L x 3.00" W x 1.69" H (127.0mm x 76.2mm x 42.9mm)	Current - Output (Max)	2.5A	
Voltage - Isolation-Efficiency70%Operating Temperature0°C ~ 70°C (With Derating)FeaturesAdjustable Output, DC Input Capable, Remote Sense, Universal InputMounting TypeChassis MountSize / Dimension5.00" L x 3.00" W x 1.69" H (127.0mm x 76.2mm x 42.9mm)	Power (Watts)	60W (80W Forced Air)	
Efficiency70%Operating Temperature0°C ~ 70°C (With Derating)FeaturesAdjustable Output, DC Input Capable, Remote Sense, Universal InputMounting TypeChassis MountSize / Dimension5.00" L x 3.00" W x 1.69" H (127.0mm x 76.2mm x 42.9mm)	Applications	ITE (Commercial)	
Operating Temperature0°C ~ 70°C (With Derating)FeaturesAdjustable Output, DC Input Capable, Remote Sense, Universal InputMounting TypeChassis MountSize / Dimension5.00" L x 3.00" W x 1.69" H (127.0mm x 76.2mm x 42.9mm)	Voltage - Isolation	-	
FeaturesAdjustable Output, DC Input Capable, Remote Sense, Universal InputMounting TypeChassis MountSize / Dimension5.00" L x 3.00" W x 1.69" H (127.0mm x 76.2mm x 42.9mm)	Efficiency	70%	
Mounting TypeChassis MountSize / Dimension5.00" L x 3.00" W x 1.69" H (127.0mm x 76.2mm x 42.9mm)	Operating Temperature	0° C ~ 70° C (With Derating)	
Size / Dimension 5.00" L x 3.00" W x 1.69" H (127.0mm x 76.2mm x 42.9mm)	Features	Adjustable Output, DC Input Capable, Remote Sense, Universal Input	
	Mounting Type	Chassis Mount	
Report errors?	Size / Dimension	5.00" L x 3.00" W x 1.69" H (127.0mm x 76.2mm x 42.9mm)	
			Report errors?

LPS65 Guarantees

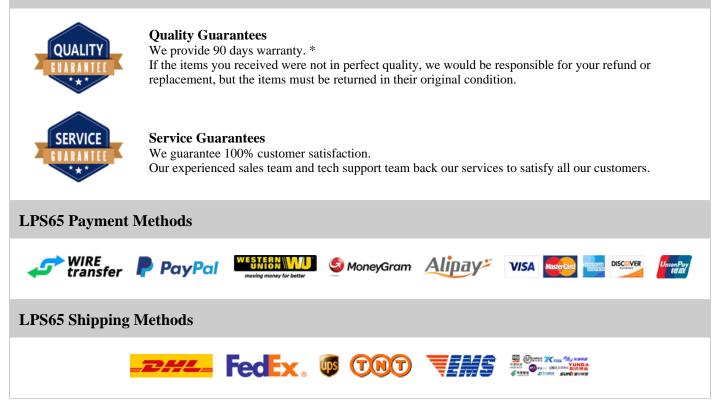

If you have any question about LPS65, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com