

LPT24

LPT24 Information

A STATE		LPT24 Artesyn Embedded Technologies Power Supplies - External/Internal (Off-Board)	
A COMPANY	Description Package	AC DC Converters AC/DC CONVERTER 5V 12V -5V 25W	
For Reference Only		For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



LPT24 Specifications

Manufacturer Artesyn Embedded Technologies Category Power Supplies - External/Internal (Off-Board) AC DC Converters AC DC Converters Package - Series LPT25 Stres Open Frame Number of Outputs 3 Voltage - Input So 264 VAC Voltage - Output 1 So 264 VAC Voltage - Output 2 12V Voltage - Output 3 -SV Voltage - Output 4 -SV Voltage - Solution ITE (Commercial) Voltage - Solution - Voltage - Solution - Voltage - Solution - Voltage - Solution - <td< th=""><th>-</th><th></th><th></th></td<>	-		
Category Power Supplies - External/Internal (Off-Board) AC DC Converters Package - Series LPT25 Sumber of Outputs 3 Voltage - Input S5 ~ 264 VAC Voltage - Output 1 5V Voltage - Output 2 12V Voltage - Output 3 - Voltage - Output 4 - Current - Output 4 - Power (Watts) 25W (40W Forced Air) Applications ITE (Commercial) Voltage - Isolation - Efficiency 0% Operating Temperature 0°C ~ 70°C (With Derating) Features Adjustable Output, DC Input Capable, Remote Sense, Universal Input Mounting Type Sov" L x 3.00" W x 1.14" H (127.0mm x 76.2mm x 29.0mm)	Manufacturer Part Number	LPT24	
Ac DC ConvertersPackage-PackageLPT25TypeOpen FrameNumber of Outputs3Voltage - Input85 ~ 264 VACVoltage - Output 15VVoltage - Output 212VVoltage - Output 3-Voltage - Output 4-Voltage - Solution-Voltage - Solution- <td>Manufacturer</td> <td>Artesyn Embedded Technologies</td> <td></td>	Manufacturer	Artesyn Embedded Technologies	
Package-SeriesLPT25TypeOpen FrameNumber of Outputs3Voltage - Input85 ~ 264 VACVoltage - Output 15VVoltage - Output 212VVoltage - Output 3-5VVoltage - Output 4-Current - Output (Max)3A, 1.5A, 500mAPower (Watts)25W (40W Forced Air)Voltage - Isolation-Efficiency0%Operating Temperature0%C ~ 70°C (With Derating)FeaturesAdjustable Output, DC Input Capable, Remote Sense, Universal InputMounting Type5.00" L x 3.00" W x 1.14" H (127.0mm x 76.2mm x 29.0mm)	Category	Power Supplies - External/Internal (Off-Board)	
Series LPT25 Type Open Frame Number of Outputs 3 Voltage - Input 85 ~ 264 VAC Voltage - Output 1 5V Voltage - Output 2 12V Voltage - Output 3 -5V Voltage - Output 4 - Current - Output (Max) 3A, 1.5A, 500mA Power (Watts) 25W (40W Forced Air) Voltage - Isolation - Efficiency 70% Operating Temperature 0°C ~ 70°C (With Derating) Features Adjustable Output, DC Input Capable, Remote Sense, Universal Input Mounting Type Chasis Mount Size / Dimension 5.00°" L x 3.00" W x 1.14" H (127.0mm x 76.2mm x 29.0mm)		AC DC Converters	
Type Open Frame Number of Outputs 3 Voltage - Input 85 ~ 264 VAC Voltage - Output 1 5V Voltage - Output 2 12V Voltage - Output 3 -5V Voltage - Output 4 - Current - Output (Max) 3A, 1.5A, 500mA Power (Watts) 25W (40W Forced Air) Applications ITE (Commercial) Voltage - Isolation - Efficiency 0% Operating Temperature 0%C ~ 70°C (With Derating) Features Adjustable Output, DC Input Capable, Remote Sense, Universal Input Mounting Type Chassis Mount Size / Dimension 5.00" L x 3.00" W x 1.14" H (127.0mm x 76.2mm x 29.0mm)	Package	-	
Number of Outputs3Number of Outputs85 ~ 264 VACVoltage - Input85 ~ 264 VACVoltage - Output 15VVoltage - Output 212VVoltage - Output 3-5VVoltage - Output 4-Current - Output (Max)3A, 1.5A, 500mAPower (Watts)25W (40W Forced Air)ApplicationsITE (Commercial)Voltage - Isolation-Efficiency70%Operating Temperature0°C ~ 70°C (With Derating)FeaturesAdjustable Output, DC Input Capable, Remote Sense, Universal InputMounting TypeChassis MountSize / Dimension5.00" L x 3.00" W x 1.14" H (127.0mm x 76.2mm x 29.0mm)	Series	LPT25	
Voltage - Input 85 ~ 264 VAC Voltage - Output 1 5V Voltage - Output 2 12V Voltage - Output 3 -5V Voltage - Output 4 - Current - Output (Max) 3A, 1.5A, 500mA Power (Watts) 25W (40W Forced Air) Applications ITE (Commercial) Voltage - Isolation - Efficiency 0°C ~ 70°C (With Derating) Operating Temperature 0°C ~ 70°C (With Derating) Features Adjustable Output, DC Input Capable, Remote Sense, Universal Input Mounting Type 5.00" L x 3.00" W x 1.14" H (127.0mm x 76.2mm x 29.0mm)	Туре	Open Frame	
Voltage - Output 1 5V Voltage - Output 2 12V Voltage - Output 3 -5V Voltage - Output 4 - Current - Output (Max) 3A, 1.5A, 500mA Power (Watts) 25W (40W Forced Air) Applications ITE (Commercial) Voltage - Isolation - Efficiency 70% Operating Temperature O°C ~ 70°C (With Derating) Features Adjustable Output, DC Input Capable, Remote Sense, Universal Input Mounting Type Chassis Mount Size / Dimension 5.00" L x 3.00" W x 1.14" H (127.0mm x 76.2mm x 29.0mm)	Number of Outputs	3	
Voltage - Output 212VVoltage - Output 3-5VVoltage - Output 4-Current - Output (Max)3A, 1.5A, 500mAPower (Watts)25W (40W Forced Air)ApplicationsITE (Commercial)Voltage - Isolation-Efficiency70%Operating Temperature0°C ~ 70°C (With Derating)FeaturesAdjustable Output, DC Input Capable, Remote Sense, Universal InputMounting Type5.00" L x 3.00" W x 1.14" H (127.0mm x 76.2mm x 29.0mm)	Voltage - Input	85 ~ 264 VAC	
Voltage - Output 3-5VVoltage - Output 4-Current - Output (Max)3A, 1.5A, 500mAPower (Watts)25W (40W Forced Air)ApplicationsITE (Commercial)Voltage - Isolation-Efficiency70%Operating Temperature0°C ~ 70°C (With Derating)FeaturesAdjustable Output, DC Input Capable, Remote Sense, Universal InputMounting Type5.00" L x 3.00" W x 1.14" H (127.0mm x 76.2mm x 29.0mm)	Voltage - Output 1	5V	
Voltage - Output 4-Current - Output (Max)3A, 1.5A, 500mAPower (Watts)25W (40W Forced Air)ApplicationsITE (Commercial)Voltage - Isolation-Efficiency70%Operating Temperature0°C ~ 70°C (With Derating)FeaturesAdjustable Output, DC Input Capable, Remote Sense, Universal InputMounting Type5.00" L x 3.00" W x 1.14" H (127.0mm x 76.2mm x 29.0mm)	Voltage - Output 2	12V	
Current - Output (Max)3A, 1.5A, 500mAPower (Watts)25W (40W Forced Air)ApplicationsITE (Commercial)Voltage - Isolation-Efficiency70%Operating Temperature0°C ~ 70°C (With Derating)PeaturesAdjustable Output, DC Input Capable, Remote Sense, Universal InputMounting Type5.00" L x 3.00" W x 1.14" H (127.0mm x 76.2mm x 29.0mm)	Voltage - Output 3	-5V	
Power (Watts)25W (40W Forced Air)ApplicationsITE (Commercial)Voltage - Isolation-Efficiency70%Operating Temperature0°C ~ 70°C (With Derating)FeaturesAdjustable Output, DC Input Capable, Remote Sense, Universal InputMounting TypeChassis MountSize / Dimension5.00" L x 3.00" W x 1.14" H (127.0mm x 76.2mm x 29.0mm)	Voltage - Output 4	-	
ApplicationsITE (Commercial)Voltage - Isolation-Efficiency70%Operating Temperature0°C ~ 70°C (With Derating)PeaturesAdjustable Output, DC Input Capable, Remote Sense, Universal InputMounting TypeChassis MountSize / Dimension5.00" L x 3.00" W x 1.14" H (127.0mm x 76.2mm x 29.0mm)	Current - Output (Max)	3A, 1.5A, 500mA	
Voltage - Isolation-Efficiency70%Operating Temperature0°C ~ 70°C (With Derating)FeaturesAdjustable Output, DC Input Capable, Remote Sense, Universal InputMounting TypeChassis MountSize / Dimension5.00" L x 3.00" W x 1.14" H (127.0mm x 76.2mm x 29.0mm)	Power (Watts)	25W (40W Forced Air)	
Efficiency70%Operating Temperature0°C ~ 70°C (With Derating)FeaturesAdjustable Output, DC Input Capable, Remote Sense, Universal InputMounting TypeChassis MountSize / Dimension5.00" L x 3.00" W x 1.14" H (127.0mm x 76.2mm x 29.0mm)	Applications	ITE (Commercial)	
Operating Temperature0°C ~ 70°C (With Derating)FeaturesAdjustable Output, DC Input Capable, Remote Sense, Universal InputMounting TypeChassis MountSize / Dimension5.00" L x 3.00" W x 1.14" H (127.0mm x 76.2mm x 29.0mm)	Voltage - Isolation	-	
FeaturesAdjustable Output, DC Input Capable, Remote Sense, Universal InputMounting TypeChassis MountSize / Dimension5.00" L x 3.00" W x 1.14" H (127.0mm x 76.2mm x 29.0mm)	Efficiency	70%	
Mounting TypeChassis MountSize / Dimension5.00" L x 3.00" W x 1.14" H (127.0mm x 76.2mm x 29.0mm)	Operating Temperature	0° C ~ 70° C (With Derating)	
Size / Dimension 5.00" L x 3.00" W x 1.14" H (127.0mm x 76.2mm x 29.0mm)	Features	Adjustable Output, DC Input Capable, Remote Sense, Universal Input	
	Mounting Type	Chassis Mount	
Report errors?	Size / Dimension	ension 5.00" L x 3.00" W x 1.14" H (127.0mm x 76.2mm x 29.0mm)	
			Report errors?

LPT24 Guarantees

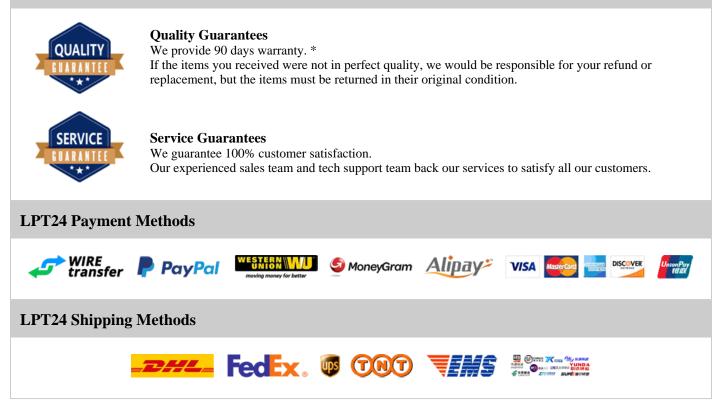

If you have any question about LPT24, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com