


# LTL2R3SYK

## LTL2R3SYK Information



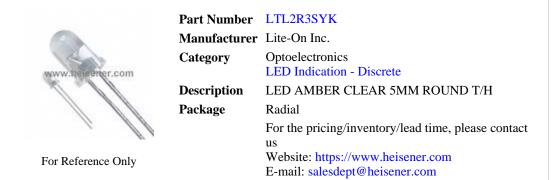

Request a Quote

#### **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



# LTL2R3SYK Specifications

ManufacturerLite-On Inc.CategoryOptoelectronicsLED Indication - DiscretePackageRadialSeries-ColorAmberConfiguration-ConfigurationColorlessLens ColorColordsMillicandela Rating2800mcdVoltage - Forward (Vf) (Typ)2,35VCurrent - Test20mAMunufing TypeSolonMunufing TypeSolonMavelength - PeakageSolonStevelength - SelationsSolonStevelength - Selatio		
CategoryOptoelectronicsLED Indication - DiscretePackageRadialSeries-ColorAmberConfiguration-ConfigurationColorlessLens ColorColordMillicandela Rating2800mcdVoltage - Forward (Vf) (Typ)2,35VCurrent - Test20mAMunning TypeThrough HoleWavelength - Poakage590nmFeatures590nmPackage / CaseSolonSurger Server591nmFeatures-Package / CaseRadialSupplier Device PackageT-1 3/4Size / Dimension-Height (Max)8,70mm	Manufacturer Part Number	LTL2R3SYK
LED Indication - DiscretePackageRadialSeries-ColorAmberConfiguration-Lens ColorColorlessLens TansparencyClearMillicandela Rating2800mcdLens Style/SizeRound with Domed Top, 5mm (T-1 3/4), 5.00mmVoltage - Forward (Vf) (Typ)2.35VCurrent - Test20mAViewing Angle30°Mounting TypeThrough HoleWavelength - Dominant590nmFeatures-Package / CaseRadialSupplier Device PackageT-1 3/4Size / Dimension-Height (Max)8.70mm	Manufacturer	Lite-On Inc.
PackageRadialSeries-ColorAmberConfiguration-Lens ColorColorlessLens TransparencyClearMillicandela Rating2800mcdLens Style/SizeRound with Domed Top, 5mm (T-1 3/4), 5.00mmVoltage - Forward (Vf) (Typ)2,35VVoltage - Groward (Vf) (Typ)30°Viewing Angle30°Wavelength - Dominant500nmWavelength - Peak501nmFeatures-Package / CaseRadialSupplier Device PackageT-1 3/4Size / Dimension-Height (Max)8,70mm	Category	Optoelectronics
Series-ColorAmberConfiguration-Lens ColorColorlessLens TransparencyClearMillicandela Rating2800mcdLens Style/SizeRound with Domed Top, 5mm (T-1 3/4), 5.00mmVoltage - Forward (Vf) (Typ)2.35VCurrent - Test20mAViewing Angle30°Mounting TypeThrough HoleWavelength - Peak591nmFeatures-Package / CaseRadialSupplier Device PackageT-1 3/4Size / Dimension-Height (Max)8.70mm		LED Indication - Discrete
ColorAmberConfiguration-Lens ColorColorlessLens TransparencyClearMillicandela Rating2800mcdLens Style/SizeRound with Domed Top, 5mm (T-1 3/4), 5.00mmVoltage - Forward (Vf) (Typ)2.35VCurrent - Test20mAViewing Angle30°Mounting TypeThrough HoleWavelength - Dominant590nmFeatures-Package / CaseRadialSupplier Device PackageT-1 3/4Size / Dimension-Height (Max)8.70mm	Package	Radial
Configuration-ConfigurationColorlessLens ColorClearMillicandela Rating2800mcdLens Style/SizeRound with Domed Top, 5mm (T-1 3/4), 5.00mmVoltage - Forward (Vf) (Typ)2.35VCurrent - Test20mAVoluming Type30°Mounting Type590nmWavelength - Dominant590nmFeatures-Package / CaseRadialSupplier Device PackageT-1 3/4Size / Dimension-Height (Max)8.70mm	Series	-
Lens ColorColorlessLens TransparencyClearMillicandela Rating2800mcdLens Style/SizeRound with Domed Top, 5mm (T-1 3/4), 5.00mmVoltage - Forward (Vf) (Typ)2.35VCurrent - Test20mACurrent - Test20mAViewing Angle30°Mounting Type590nmWavelength - Dominant590nmFeatures-Package / CaseRadialSupplier Device PackageT-1 3/4Size / Dimension-Height (Max)8.70mm	Color	Amber
Lens TransparencyClearMillicandela Rating2800mcdLens Style/SizeRound with Domed Top, 5mm (T-1 3/4), 5.00mmVoltage - Forward (Vf) (Typ)2.35VCurrent - Test20mACurrent - Test30°Viewing Angle30°Mounting TypeFonugh HoleWavelength - Dominant590nmFeatures-Package / CaseRadialSupplier Device PackageT-1 3/4Size / Dimension-Height (Max)8.70mm	Configuration	-
Millicandela Rating2800mcdLens Style/SizeRound with Domed Top, 5mm (T-1 3/4), 5.00mmVoltage - Forward (Vf) (Typ)2.35VCurrent - Test20mAViewing Angle30°Mounting TypeThrough HoleWavelength - Dominant590nmWavelength - Peak591nmFeatures-Package / CaseRadialSupplier Device PackageT-1 3/4Size / Dimension-Height (Max)8.70mm	Lens Color	Colorless
Lens Style/SizeRound with Domed Top, 5mm (T-1 3/4), 5.00mmVoltage - Forward (Vf) (Typ)2.35VCurrent - Test20mAViewing Angle30°Mounting TypeThrough HoleWavelength - Dominant590nmWavelength - Peak591nmFeatures-Package / CaseRadialSupplier Device PackageT-1 3/4Size / Dimension-Height (Max)8.70mm	Lens Transparency	Clear
Voltage - Forward (Vf) (Typ)2.35VCurrent - Test20mAViewing Angle30°Mounting TypeThrough HoleWavelength - Dominant590nmWavelength - Peak591nmFeatures-Package / CaseRadialSupplier Device PackageT-1 3/4Size / Dimension-Height (Max)8.70mm	Millicandela Rating	2800mcd
Current - Test20mAViewing Angle30°Mounting TypeThrough HoleWavelength - Dominant590nmWavelength - Peak591nmFeatures-Package / CaseRadialSupplier Device Package-13/4Size / Dimension-Height (Max)8.70mm	Lens Style/Size	Round with Domed Top, 5mm (T-1 3/4), 5.00mm
Viewing Angle30°Mounting TypeThrough HoleWavelength - Dominant590nmWavelength - Peak591nmFeatures-Package / CaseRadialSupplier Device PackageT-1 3/4Size / Dimension-Height (Max)8.70mm	Voltage - Forward (Vf) (Typ)	2.35V
Mounting TypeThrough HoleWavelength - Dominant590nmWavelength - Peak591nmFeatures-Package / CaseRadialSupplier Device PackageT-1 3/4Size / Dimension-Height (Max)8.70mm	Current - Test	20mA
Wavelength - Dominant590nmWavelength - Peak591nmFeatures-Package / CaseRadialSupplier Device PackageT-1 3/4Size / Dimension-Height (Max)8.70mm	Viewing Angle	30°
Wavelength - Peak591nmFeatures-Package / CaseRadialSupplier Device PackageT-1 3/4Size / Dimension-Height (Max)8.70mm	Mounting Type	Through Hole
Features-Package / CaseRadialSupplier Device PackageT-1 3/4Size / Dimension-Height (Max)8.70mm	Wavelength - Dominant	590nm
Package / CaseRadialSupplier Device PackageT-1 3/4Size / Dimension-Height (Max)8.70mm	Wavelength - Peak	591nm
Supplier Device PackageT-1 3/4Size / Dimension-Height (Max)8.70mm	Features	-
Size / Dimension -   Height (Max) 8.70mm	Package / Case	Radial
Height (Max) 8.70mm	Supplier Device Package	T-1 3/4
	Size / Dimension	-
Report errors?	Height (Max)	8.70mm
		Report errors?

#### LTL2R3SYK Guarantees



Quality Guarantees

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

# SERVICE BUARANTEE

#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

## LTL2R3SYK Payment Methods



# LTL2R3SYK Shipping Methods



If you have any question about LTL2R3SYK, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com