

## M22-2040705

#### M22-2040705 Information

Heisener.com	Part Number Manufacturer Category Description Package		
For Reference Only		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

#### **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



#### M22-2040705 Specifications

_	
Manufacturer Part Number	M22-2040705
Manufacturer	Harwin Inc.
Category	Connectors, Interconnects
	Rectangular Connectors - Headers, Male Pins
Package	-
Series	M22
Connector Type	Header, Cuttable
Contact Type	Male Pin
Pitch - Mating	0.079" (2.00mm)
Style	Board to Board
Shrouding	Unshrouded
Number of Positions	14
Number of Positions Loaded	All
Number of Rows	2
Row Spacing - Mating	0.079" (2.00mm)
Mounting Type	Through Hole, Right Angle
Termination	Solder
Fastening Type	Push-Pull
Contact Length - Mating	0.138" (3.50mm)
Contact Length - Post	0.118" (3.00mm)
Overall Contact Length	-
Insulation Height	0.157" (4.00mm)
Contact Shape	Square
Contact Finish - Mating	Gold

Contact Finish Thickness - Mating	-
Contact Finish - Post	-
Contact Material	Phosphor Bronze
Insulation Material	Polyamide (PA6T), Nylon 6T
Features	-
Operating Temperature	-40°C ~ 105°C
Ingress Protection	-
Material Flammability Rating	UL94 V-0
Insulation Color	Black
	Report errors?

#### M22-2040705 Guarantees



#### Quality Guarantees


We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

# SERVICE GUARANTEE

#### Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

### M22-2040705 Payment Methods

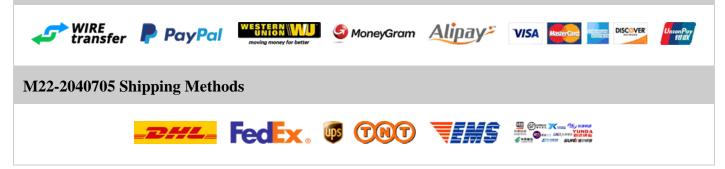

If you have any question about M22-2040705, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com