

## M22-7130442

## M22-7130442 Information



## **Certified Quality**


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## M22-7130442 Specifications

Manufacturer Part NumberM22-7130442ManufacturerHarwin Inc.CategoryConnectors, InterconnectsPackageRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesM22Connector TypeReceptacleContact TypeReceptacleStyleBoard to Board or CableNumber of PositionsAlPitch - Mating0.079" (2.00mm)Number of Rows1		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesM22Connector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions4Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)	Manufacturer Part Number	M22-7130442
Package-SeriesM22Connector TypeReceptacleContact TypeReceptacleStyleBoard to Board or CableNumber of PositionsAlPitch - Mating0.079" (2.00mm)	Manufacturer	Harwin Inc.
Package-SeriesM22Connector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions LoadedAllPitch - Mating0.079" (2.00mm)	Category	Connectors, Interconnects
SeriesM22Connector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions4Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions4Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)	Package	-
Contact TypeFemale SocketStyleBoard to Board or CableNumber of Positions4Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)	Series	M22
StyleBoard to Board or CableNumber of Positions4Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)	Connector Type	Receptacle
Number of Positions4Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)	Style	Board to Board or Cable
Pitch - Mating 0.079" (2.00mm)	Number of Positions	4
· · · · · · · · · · · · · · · · · · ·	Number of Positions Loaded	All
Number of Rows 1	Pitch - Mating	0.079" (2.00mm)
	Number of Rows	1
Row Spacing - Mating -	Row Spacing - Mating	-
Mounting Type Through Hole	Mounting Type	Through Hole
Termination Solder	Termination	Solder
Fastening Type Push-Pull	Fastening Type	Push-Pull
Contact Finish - Mating Gold	Contact Finish - Mating	Gold
Contact Finish Thickness - Mating -	Contact Finish Thickness - Mating	-
Insulation Color Black	Insulation Color	Black
Insulation Height 0.173" (4.40mm)	Insulation Height	0.173" (4.40mm)
Contact Length - Post 0.094" (2.40mm)	Contact Length - Post	0.094" (2.40mm)
Operating Temperature $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$	Operating Temperature	$-40^{\circ}\mathrm{C} \sim 105^{\circ}\mathrm{C}$
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin	
Mated Stacking Heights	5.9mm	
Ingress Protection	-	
Features	-	
		Report errors?

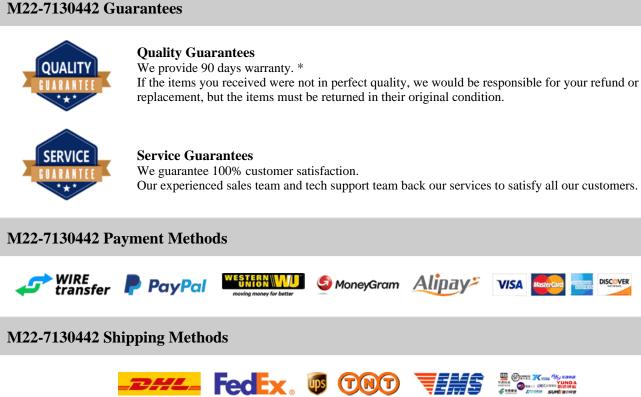

DISCOVER

If you have any question about M22-7130442, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com