


M39014/01-1237

M39014/01-1237 Information

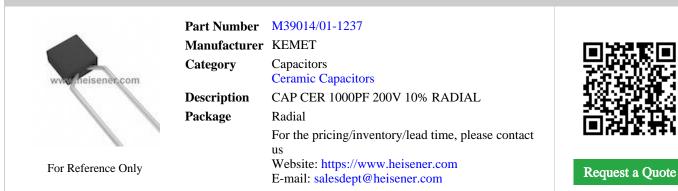

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



M39014/01-1237 Specifications

Manufacturer Part NumberM39014/01-1237ManufacturerKEMETCategoryCapacitorsPackageRadialPackageMilitary, MIL-PRF-39014, CKR05Capacitance1000pFColerance±10%Yoltage - Rated200VPorteing Temperature CoefficientBXOperating Temperature-55°C ~ 125°CFeaturesMilitaryApplications-6encal PurposeApplicationsGeneral PurposeApplicationsGeneral PurposeFaitures AgeMilitaryMounting TypeMoltogPackage / CaseRadialSize / ClaseAgoli Size /		
CategoryCapacitorsPackageRadialSeriesMilitary, MIL-PRF-39014, CKR05Capacitance1000pFTolerance±10%Voltage - Rated200VTomperature CoefficientBXOperating Temperature-55°C ~ 125°CFeaturesMilitaryApplications-6eneral PurposeFailure RateM (1%)Mounting TypeThrough HoleFackage / CaseRadialSize / Dimension0.100° L x 0.00° W (4.83mm x 2.9mm)Fickers (Max)-Height - Seated (Max)-Fickers (Max)6.00° (5.08mm)Lead Spacing6.00° (5.08mm)Lead StyleFormed Leads	Manufacturer Part Number	M39014/01-1237
Indext CapacitorsPackageRadialSeriesMilitary, MIL-PRF-39014, CKR05Capacitance1000pFTolerance±10%Voltage - Rated200VTemperature CoefficientBXOperating Temperature-55°C ~ 125°CFeaturesMilitaryApplications-Failure RateM (1%)Mounting TypeGeneral PurposeFackage / CaseRadialSize / Dimension0.100° L x 0.090° W (4.83mm x 2.29mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200° (5.08mm)Lead StyleFormed Leads	Manufacturer	KEMET
PackageRadialSeriesMilitary, MIL-PRF-39014, CKR05Capacitance1000pFTolerance410%Voltage - Rated200VTemperature CoefficientBXOperating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateM (1%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.200" (5.08mm)Height - Seated (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads	Category	Capacitors
SeriesMilitary, MIL-PRF-39014, CKR05Capacitance1000pFTolerance±10%Voltage - Rated200VTemperature CoefficientBXOperating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateM(1%)Mounting TypeThrough HoleSize / Dimension0.190° L x 0.090° W (4.83mm x 2.29mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200° (5.08mm)Lead StyleFormed Leads		Ceramic Capacitors
Capacitance1000pFTolerance±10%Voltage - Rated200VTemperature CoefficientBXOperating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateM(1%)Mounting TypeThrough HoleSize / Dimension0.190° L x 0.090° W (4.83mm x 2.29mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200° (5.08mm)Lead StyleFormed Leads	Package	Radial
Tolerance±10%Voltage - Rated200VTemperature CoefficientBXOperating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGenera PurposeFailure RateM (1%)Mounting TypeRadialPackage / CaseRadialSize / Dimension0.100° L x 0.000° W (4.83mm x 2.29mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200° (5.08mm)Lead SpacingFormed LeadsLead StyleFormed Leads	Series	Military, MIL-PRF-39014, CKR05
Voltage - Rated200VTemperature CoefficientBXOperating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateM (1%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.190° L x 0.090° W (4.83mm x 2.29mm)Height - Seated (Max)-Thickness (Max)0.200° (5.08mm)Lead Spacing6.200° (5.08mm)Lead StyleFormed Leads	Capacitance	1000pF
Temperature CoefficientBXOperating Temperature-5°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateM (1%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.190° L x 0.090° W (4.83mm x 2.29mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200° (5.08mm)Lead StyleFormed Leads	Tolerance	$\pm 10\%$
Operating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateM (1%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.190" L x 0.090" W (4.83mm x 2.29mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads	Voltage - Rated	200V
FeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateM (1%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.190" L x 0.090" W (4.83mm x 2.29mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads	Temperature Coefficient	BX
Ratings-ApplicationsGeneral PurposeFailure RateM (1%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.190" L x 0.090" W (4.83mm x 2.29mm)Height - Seated (Max)0.200" (5.08mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads	Operating Temperature	-55°C ~ 125°C
ApplicationsGeneral PurposeFailure RateM (1%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.190" L x 0.090" W (4.83mm x 2.29mm)Height - Seated (Max)0.200" (5.08mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads	Features	Military
Failure RateM (1%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.190" L x 0.090" W (4.83mm x 2.29mm)Height - Seated (Max)0.200" (5.08mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads	Ratings	-
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.190" L x 0.090" W (4.83mm x 2.29mm)Height - Seated (Max)0.200" (5.08mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads	Applications	General Purpose
Package / CaseRadialSize / Dimension0.190" L x 0.090" W (4.83mm x 2.29mm)Height - Seated (Max)0.200" (5.08mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads	Failure Rate	M (1%)
Size / Dimension 0.190" L x 0.090" W (4.83mm x 2.29mm) Height - Seated (Max) 0.200" (5.08mm) Thickness (Max) - Lead Spacing 0.200" (5.08mm) Lead Style Formed Leads	Mounting Type	Through Hole
Height - Seated (Max)0.200" (5.08mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads	Package / Case	Radial
Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads	Size / Dimension	0.190" L x 0.090" W (4.83mm x 2.29mm)
Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads	Height - Seated (Max)	0.200" (5.08mm)
Lead Style Formed Leads	Thickness (Max)	-
	Lead Spacing	0.200" (5.08mm)
Report errors?	Lead Style	Formed Leads
		Report errors?

M39014/01-1237 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

M39014/01-1237 Payment Methods



M39014/01-1237 Shipping Methods



If you have any question about M39014/01-1237, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com