


## M39014/01-1510V

#### M39014/01-1510V Information

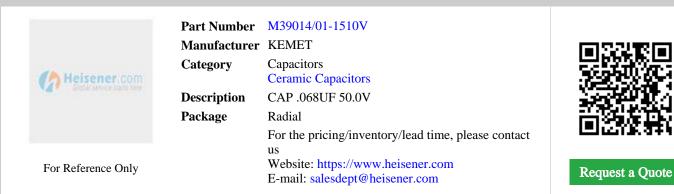

#### **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



### M39014/01-1510V Specifications

Manufacturer Part Number M39014/01-1510V   Manufacturer KEMET   Category Capacitors   Caranic Capacitors Ceramic Capacitors   Package Radial   Series Military, MIL-PRF-39014, CKR05   Capacitance 0.068µF   Yoltage - Rated 0.068µF   Yoltage - Rated 50°   Operating Temperature 50°C ~ 125°C   Pactangs General Purpose   Pactangs General Purpose   Applications General Purpose   Pactage / Case Radial   Nounting Type Noungh Hole   Yoltage / Case Radial   Size / Dimension 0.000° (S 0.8mm)   Height - Seated (Max) -   Yoltage Sateging 0.200° (S 0.8mm)	*	
CategoryCapacitorsPackageRadialSeriesMilitary, MIL-PRF-39014, CKR05Capacitance0.068µFColacatiance±10%Yoltage - Rated50VTomperature CoefficientBXOperating Temperature-55°C ~ 125°C ~ 125°CFeaturesMilitary, MIL-PRF-30014, CMR05Fatures6eneral PurposeApplications-6000000000000000000000000000000000000	Manufacturer Part Number	M39014/01-1510V
Indext of the section sPackageRadialSeriesMilitary, MIL-PRF-39014, CKR05Capacitance0.068µFTolerance±10%Voltage - Rated50VTemperature CoefficientBXOperating Temperature-55°C ~ 125°CFeaturesMilitaryApplications-ApplicationsGeneral PurposeFailure RateP (0.1%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.100° L x 0.000° W (4.83mm x 2.29mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200° (5.08mm)Lead StyleFormed Leads	Manufacturer	KEMET
PackageRadialSeriesMiltary, MIL-PRF-39014, CKR05Capacitance0.068µFTolerance±10%Voltage - Rated50VTemperature CoefficientBXOperating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFoldure RatedP(0.1%)Mounting TypeHolog HoleSize / Dimension0.100° L x 0.000° W (4.83mm x 2.29mm)Fickers (Max)-Height - Seated (Max)0.200° (5.08mm)Fickaps (Max)-Lead Spacing0.200° (5.08mm)Lead StyleFormed Leads	Category	Capacitors
SeriesMilitary, MIL-PRF-39014, CKR05Series0.068µFCapacitance±10%Tolerance±10%Voltage - Rated50VTemperature CoefficientBXOperating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateP(0.1%)Mounting TypeThrough HoleSize / Dimension0.190° L x 0.090° W (4.83mm x 2.29mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200° (5.08mm)Lead StyleFormed Leads		Ceramic Capacitors
Capacitance0.068µFTolerance±10%Voltage - Rated50VTemperature CoefficientBXOperating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateP (0.1%)Mounting TypeThrough HoleSize / Dimension0.190° L x 0.090° W (4.83mm x 2.29mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200° (5.08mm)Lead StyleFormed Leads	Package	Radial
Tolerance±10%Voltage - Rated50VTemperature CoefficientBXOperating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateP (0.1%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.190° L x 0.090° W (4.83mm x 2.29mm)Height - Seated (Max)-Lead Spacing0.200° (5.08mm)Lead SpacingDiremed LeadsFormed Leads-	Series	Military, MIL-PRF-39014, CKR05
Voltage - Rated50VTemperature CoefficientBXOperating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateP (0.1%)Mounting TypeRadialPackage / CaseRadialSize / Dimension0.190° L x 0.090° W (4.83mm x 2.29mm)Height - Seated (Max)-Lead Spacing0.200° (5.08mm)Lead SpacingSorred LeadsFormed LeadsFormed Leads	Capacitance	0.068µF
Temperature CoefficientBXOperating Temperature-55°C ~ 125°CFeaturesMilitaryFatings-ApplicationsGeneral PurposeFailure RateP(0.1%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.190° L x 0.090° W (4.83mm x 2.29mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200° (5.08mm)Lead StyleFormed Leads	Tolerance	±10%
Operating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateP (0.1%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.190" L x 0.090" W (4.83mm x 2.29mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads	Voltage - Rated	50V
FeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateP(0.1%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.190" L x 0.090" W (4.83mm x 2.29mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads	Temperature Coefficient	BX
Ratings-ApplicationsGeneral PurposeFailure RateP (0.1%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.190" L x 0.090" W (4.83mm x 2.29mm)Height - Seated (Max)0.200" (5.08mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads	Operating Temperature	-55°C ~ 125°C
ApplicationsGeneral PurposeFailure RateP(0.1%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.190" L x 0.090" W (4.83mm x 2.29mm)Height - Seated (Max)0.200" (5.08mm)Thickness (Max)0.200" (5.08mm)Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads	Features	Military
Failure RateP (0.1%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.190" L x 0.090" W (4.83mm x 2.29mm)Height - Seated (Max)0.200" (5.08mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads	Ratings	-
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.190" L x 0.090" W (4.83mm x 2.29mm)Height - Seated (Max)0.200" (5.08mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads	Applications	General Purpose
Package / CaseRadialSize / Dimension0.190" L x 0.090" W (4.83mm x 2.29mm)Height - Seated (Max)0.200" (5.08mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads	Failure Rate	P (0.1%)
Size / Dimension 0.190" L x 0.090" W (4.83mm x 2.29mm)   Height - Seated (Max) 0.200" (5.08mm)   Thickness (Max) -   Lead Spacing 0.200" (5.08mm)   Lead Style Formed Leads	Mounting Type	Through Hole
Height - Seated (Max)0.200" (5.08mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads	Package / Case	Radial
Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads	Size / Dimension	0.190" L x 0.090" W (4.83mm x 2.29mm)
Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads	Height - Seated (Max)	0.200" (5.08mm)
Lead Style Formed Leads	Thickness (Max)	-
· · · · · · · · · · · · · · · · · · ·	Lead Spacing	0.200" (5.08mm)
Report errors?	Lead Style	Formed Leads
		Report errors?

#### M39014/01-1510V Guarantees



Quality Guarantees

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

# SERVICE EUARANTEE

#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

#### M39014/01-1510V Payment Methods





If you have any question about M39014/01-1510V, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com