


# M39014/01-1523

### M39014/01-1523 Information

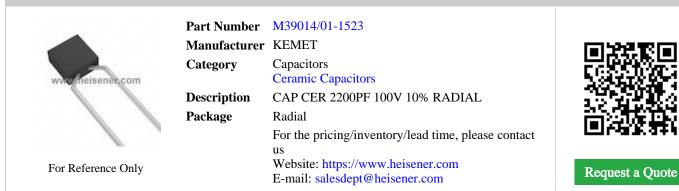

## **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## M39014/01-1523 Specifications

Manufacturer Part NumberM39014/01-1523ManufacturerKEMETCategoryCapacitorsPackageRadialPackageMilitary, MIL-PRF-39014, CKR05Capacitance200pFTolerance±10%Yoltage - Rated100VPorting Temperature CoefficientBXOperating Temperature-55°C ~ 125°CFaturesMilitaryApplications-6cenaPlurgoseFaturesGoneaPlurgoseApplicationsGeneaPlurgoseFaturesRollyApplicationsGoneaPlurgoseFaturesMilitaryApplicationsGoneaPlurgoseFacturesRollyApplicationsGoneaPlurgoseFacturesMounting TypeHough HoleStoreFactures (Max)0.200° (5.08mm)Factures (Max)-Factures (Max)		
CategoryCapacitorsPackageRadialSeriesMilitary, MIL-PRF-39014, CKR05Capacitance2200FTolerance10%Yoltage - Rated100VTomperature CoefficientBXOperating Temperature-55°C ~ 125°CFeaturesMilitaryApplications-60019Failure RateRatingApplicationsGeneral PurposeFailure RateRol01%Mounting TypeThrough HolePackage / CaseAidialSize / Dimension0.100° L x 0.00° W (4.83mm x 2.29mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing6.00° S08mm)Lead SpacingSorred LeadsLead StyleFormed Leads	Manufacturer Part Number	M39014/01-1523
Ceramic CapacitorsPackageRadialSeriesMilitary, MIL-PRF-39014, CKR05Capacitance2200pFTolerance±10%Voltage - Rated100VTemperature CoefficientBXOperating Temperature-55°C ~ 125°CFeaturesMilitaryApplicationsGeneral PurposeFailure RateR (0.01%)Mounting TypeHrough HolePackage / CaseRadialSize / Dimension0.200° (5.08mm)Height - Seated (Max)-Lead Spacing0.200° (5.08mm)Lead StyleFormed Leads	Manufacturer	KEMET
PackageRadialSeriesMilitary, MIL-PRF-39014, CKR05Capacitance200pFTolerance10%Voltage - Rated00VTemperature CoefficientBXOperating Temperature>55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateR (0.01%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.200" (5.08mm)Hickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed LeadsKategelSize / Size /	Category	Capacitors
SeriesMilitary, MIL-PRF-39014, CKR05Capacitance2200pFTolerance±10%Voltage - Rated100VTemperature CoefficientBXOperating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateR (0.01%)Mounting TypeThrough HoleSize / Dimension0.190° L x 0.090° W (4.83mm x 2.29mm)Height - Seated (Max)-Lead Spacing0.200° (5.08mm)Lead SpacingFormed LeadsLead StyleFormed Leads		Ceramic Capacitors
Capacitance2200pFTolerance±10%Voltage - Rated100VTemperature CoefficientBXOperating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateR (0.01%)Mounting TypeThrough HoleSize / Dimension0.190° L x 0.090° W (4.83mm x 2.29mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200° (5.08mm)Lead StyleFormed Leads	Package	Radial
Tolerance±10%Voltage - Rated100VTemperature CoefficientBXOperating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateR (0.01%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.200" (5.08mm) x 2.29mm)Height - Seated (Max)-Lead Spacing0.200" (5.08mm)Lead SycleSome CaseLead StyleFormed Leads	Series	Military, MIL-PRF-39014, CKR05
Voltage - Rated100VTemperature CoefficientBXOperating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateR (0.01%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.190" L x 0.090" W (4.83mm x 2.29mm)Height - Seated (Max)-Thickness (Max)0.200" (5.08mm)Lead Spacing6.200" (5.08mm)Lead StyleFormed Leads	Capacitance	2200pF
Temperature CoefficientBXOperating Temperature-5°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateR (0.01%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.190° L x 0.090° W (4.83mm x 2.29mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200° (5.08mm)Lead StyleFormed Leads	Tolerance	$\pm 10\%$
Operating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateR (0.01%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.190" L x 0.090" W (4.83mm x 2.29mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads	Voltage - Rated	100V
FeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateR (0.01%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.190" L x 0.090" W (4.83mm x 2.29mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads	Temperature Coefficient	BX
Ratings-ApplicationsGeneral PurposeFailure RateR (0.01%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.190" L x 0.090" W (4.83mm x 2.29mm)Height - Seated (Max)0.200" (5.08mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads	Operating Temperature	-55°C ~ 125°C
ApplicationsGeneral PurposeFailure RateR (0.01%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.190" L x 0.090" W (4.83mm x 2.29mm)Height - Seated (Max)0.200" (5.08mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads	Features	Military
Failure RateR (0.01%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.190" L x 0.090" W (4.83mm x 2.29mm)Height - Seated (Max)0.200" (5.08mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads	Ratings	-
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.190" L x 0.090" W (4.83mm x 2.29mm)Height - Seated (Max)0.200" (5.08mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads	Applications	General Purpose
Package / CaseRadialSize / Dimension0.190" L x 0.090" W (4.83mm x 2.29mm)Height - Seated (Max)0.200" (5.08mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads	Failure Rate	R (0.01%)
Size / Dimension 0.190" L x 0.090" W (4.83mm x 2.29mm)   Height - Seated (Max) 0.200" (5.08mm)   Thickness (Max) -   Lead Spacing 0.200" (5.08mm)   Lead Style Formed Leads	Mounting Type	Through Hole
Height - Seated (Max)0.200" (5.08mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads	Package / Case	Radial
Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads	Size / Dimension	0.190" L x 0.090" W (4.83mm x 2.29mm)
Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads	Height - Seated (Max)	0.200" (5.08mm)
Lead Style Formed Leads	Thickness (Max)	-
	Lead Spacing	0.200" (5.08mm)
Report errors?	Lead Style	Formed Leads
		Report errors?

#### M39014/01-1523 Guarantees



Quality Guarantees

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

#### M39014/01-1523 Payment Methods



## M39014/01-1523 Shipping Methods



If you have any question about M39014/01-1523, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com