


M39014/02-1318

M39014/02-1318 Information

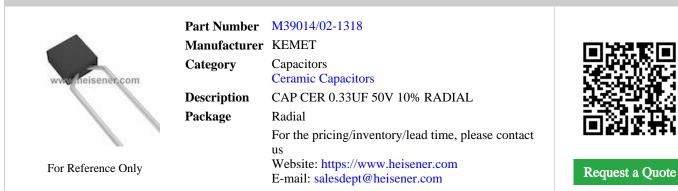

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



M39014/02-1318 Specifications

Manufacturer Part Number M39014/02-1318 Manufacturer KEMET Category Capacitors Package Radial Series Military, MIL-PRF-39014, CKR06 Capacitance 0.33µF Tolerance ±10% Yoltage - Rated 50V Yoltage - Rated 50V Yoltage - Rated 50V Yoltage - Rated 50°C ~ 125°C Yoltaging -50°C ~ 125°C Yoltaging -6encal Purpose Yo		
CategoryCapacitorsPackageRadialSeriesMilitary, MIL-PRF-39014, CKR06Capacitance0.33 µFTolerance±10%Voltage - Rated50VTemperature CoefficientBXOperating Temperature-55°C ~ 125°CFeaturesMilitaryApplications-ApplicationsGeneral PurposeFailure RateR (0.01%)Mounting TypeNrough HolePackage / CaseRadialSize / Dimension0.200° L x 0.000° W (7.37mm x 2.9mm)Height - Seated (Max)-Irickness (Max)-Lead Spacing6.001%)Lead StyleSize (Size)Lead StyleSize)Straipt5.000%)<	Manufacturer Part Number	M39014/02-1318
Ceramic CapacitorsPackageRadialSeriesMilitary, MIL-PRF-39014, CKR06Capacitance0.33µFTolerance±10%Voltage - Rated50VTemperature CoefficientBXOperating Temperature-55°C ~ 125°CFeaturesMilitaryApplications-ApplicationsGeneral PurposeFailure RateR (0.01%)Mounting TypeHrough HolePackage / CaseRadialSize / Dimension0.300" (7.62mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Manufacturer	KEMET
PackageRadialSeriesMilitary, MIL-PRF-39014, CKR06Capacitance0.33µFTolerance±10%Voltage - Rated50VTemperature CoefficientBXOperating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateR(0.01%)Mounting TypeThrough HoleSize / Dimension0.200° L x 0.090° W (7.37mm x 2.29mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200° (5.08mm)Lead StyleStraight	Category	Capacitors
SinceMilitary, MIL-PRF-39014, CKR06Capacitance0.33µFTolerance±10%Voltage - Rated50VTemperature CoefficientBXOperating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateR (0.01%)Mounting TypeThrough HoleSize / Dimension0.200° L x 0.090° W (7.37mm x 2.29mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200° (5.08mm)Lead StyleStraight		Ceramic Capacitors
Capacitance0.33µFTolerance±10%Voltage - Rated50VTemperature CoefficientBXOperating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateR (0.01%)Mounting TypeThrough HoleSize / Dimension0.290° L x 0.090° W (7.37mm x 2.29mm)Height - Seated (Max)-Lead Spacing0.200° (5.08mm)Lead StyleStraight	Package	Radial
Tolerance±10%Voltage - Rated50VTemperature CoefficientBXOperating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateR (0.01%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.200" L x 0.090" W (7.37mm x 2.29mm)Height - Seated (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStright	Series	Military, MIL-PRF-39014, CKR06
Voltage - Rated50VTemperature CoefficientBXOperating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateR (0.01%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.200" L x 0.090" W (7.37mm x 2.29mm)Height - Seated (Max)-Lead Spacing0.200" (5.08mm)Lead SyleStraightKatingStraightLead StyleStraight	Capacitance	0.33µF
Temperature CoefficientBXOperating Temperature-5°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateR (0.01%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.290° L x 0.090° W (7.37mm x 2.29mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200° (5.08mm)Lead StyleStraight	Tolerance	$\pm 10\%$
Operating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateR (0.01%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.290" L x 0.090" W (7.37mm x 2.29mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Voltage - Rated	50V
FeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateR (0.01%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.290" L x 0.090" W (7.37mm x 2.29mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Temperature Coefficient	BX
Ratings-ApplicationsGeneral PurposeFailure RateR (0.01%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.290" L x 0.090" W (7.37mm x 2.29mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Operating Temperature	-55°C ~ 125°C
ApplicationsGeneral PurposeFailure RateR (0.01%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.290" L x 0.090" W (7.37mm x 2.29mm)Height - Seated (Max)0.300" (7.62mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Features	Military
Failure RateR (0.01%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.290" L x 0.090" W (7.37mm x 2.29mm)Height - Seated (Max)0.300" (7.62mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Ratings	-
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.290" L x 0.090" W (7.37mm x 2.29mm)Height - Seated (Max)0.300" (7.62mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Applications	General Purpose
Package / CaseRadialSize / Dimension0.290" L x 0.090" W (7.37mm x 2.29mm)Height - Seated (Max)0.300" (7.62mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Failure Rate	R (0.01%)
Size / Dimension 0.290" L x 0.090" W (7.37mm x 2.29mm) Height - Seated (Max) 0.300" (7.62mm) Thickness (Max) - Lead Spacing 0.200" (5.08mm) Lead Style Straight	Mounting Type	Through Hole
Height - Seated (Max)0.300" (7.62mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Package / Case	Radial
Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Size / Dimension	0.290" L x 0.090" W (7.37mm x 2.29mm)
Lead Spacing0.200" (5.08mm)Lead StyleStraight	Height - Seated (Max)	0.300" (7.62mm)
Lead Style Straight	Thickness (Max)	-
	Lead Spacing	0.200" (5.08mm)
Report errors?	Lead Style	Straight
		Report errors?

M39014/02-1318 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

M39014/02-1318 Payment Methods



M39014/02-1318 Shipping Methods



If you have any question about M39014/02-1318, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com