


M39014/02-1419

M39014/02-1419 Information

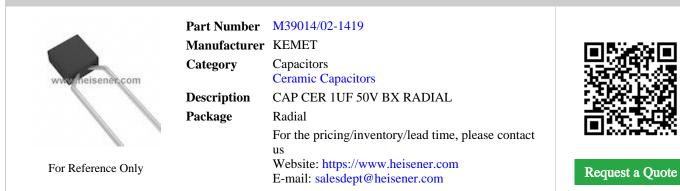

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



M39014/02-1419 Specifications

Manufacturer Part Number M39014/02-1419 Manufacturer KEMET Catagory Capacitors Package Radial Package Miltary, MIL-PRF-39014, CKR06 Capacitance IµF Tolerance ±10% Yoltage - Rated SOV Yoltage - Case Rated Yoltage - Case		
CategoryCapacitorsPackageRadialSeriesMilitary, MIL-PRF-39014, CKR06CapacitanceIµFTolerance±10%Voltage - Rated50°CPoperatine CoefficientBXOperating Temperature-55°C ~ 125°CPattersMilitaryRatings-ApplicationsGeneral PurposeFailure RateS0(001%)Mounting TypeNang HolePackage / CaseRadialSiz / Dimension.200°T x 0.000°W (7.37mm x 2.29mm)Height - Seated (Max)-Thickness (Max).200°T (5.08mm)Lead SpacingStraight	Manufacturer Part Number	M39014/02-1419
Ceramic CapacitorsPackageRadialSeriesMilitary, MIL-PRF-39014, CKR06Capacitance1µFTolerance±10%Voltage - Rated50VTemperature CoefficientBXOperating Temperature-55°C ~ 125°CFeaturesMilitaryApplications-ApplicationsS001%)Mounting TypeGeneral PurposePackage / CaseRadialSize / Dimension0.200° L x 0.090° W (7.37mm x 2.29mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200° (5.08mm)Lead StyleStraight	Manufacturer	KEMET
PackageRadialSeriesMiliary, MIL-PRF-39014, CKR06CapacitanceIµFTolerance±10%Voltage Rated50VTemperature CoefficientBXOperating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateS(0.001%)Mounting TypeThrough HoleSize / Dimension0.200° L x 0.090° W (7.37mm x 2.29mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200° (5.08mm)Lead StyleStraight	Category	Capacitors
SeriesMilitary, MIL-PRF-39014, CKR06Capacitance1µFTolerance±10%Voltage Rated50VTemperature CoefficientBXOperating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateS (0.001%)Mounting TypeThrough HoleSize / Dimension0.200° L x 0.090° W (7.37mm x 2.29mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200° (5.08mm)Lead StyleStraight		Ceramic Capacitors
CapacitanceμμTolerance±10%Yoltage - Rated50VTemperature CoefficientBXOperating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateS (0.01%)Mounting TypeRadialSize / Dimension0.290° L x 0.090° W (7.37mm x 2.29mm)Height - Seated (Max)0.300° (7.62mm)Thickness (Max)0.200° (5.08mm)Lead SpacingStraight	Package	Radial
Tolerance±10%Voltage - Rated50VTemperature CoefficientBXOperating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateS (0.001%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.290° L x 0.090° W (7.37mm x 2.29mm)Height - Seated (Max)-Lead Spacing0.200° (5.08mm)Lead StyleStriaght	Series	Military, MIL-PRF-39014, CKR06
Voltage - Rated50VTemperature CoefficientBXOperating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateS (0.001%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.200" L x 0.090" W (7.37mm x 2.29mm)Height - Seated (Max)-Lead Spacing0.200" (5.08mm)Lead SpacingStraightLead StyleStraight	Capacitance	1µF
Temperature CoefficientBXOperating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateS (0.001%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.290° L x 0.090° W (7.37mm x 2.29mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200° (5.08mm)Lead StyleStraight	Tolerance	$\pm 10\%$
Operating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateS (0.001%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.290" L x 0.090" W (7.37mm x 2.29mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Voltage - Rated	50V
FeaturesMilitaryFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateS (0.001%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.290" L x 0.090" W (7.37mm x 2.29mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Temperature Coefficient	BX
Ratings-ApplicationsGeneral PurposeFailure RateS (0.001%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.290" L x 0.090" W (7.37mm x 2.29mm)Height - Seated (Max)0.300" (7.62mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Operating Temperature	-55°C ~ 125°C
ApplicationsGeneral PurposeFailure RateS (0.001%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.290" L x 0.090" W (7.37mm x 2.29mm)Height - Seated (Max)0.300" (7.62mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Features	Military
Failure RateS (0.001%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.290" L x 0.090" W (7.37mm x 2.29mm)Height - Seated (Max)0.300" (7.62mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Ratings	-
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.290" L x 0.090" W (7.37mm x 2.29mm)Height - Seated (Max)0.300" (7.62mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Applications	General Purpose
Package / CaseRadialSize / Dimension0.290" L x 0.090" W (7.37mm x 2.29mm)Height - Seated (Max)0.300" (7.62mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Failure Rate	S (0.001%)
Size / Dimension 0.290" L x 0.090" W (7.37mm x 2.29mm) Height - Seated (Max) 0.300" (7.62mm) Thickness (Max) - Lead Spacing 0.200" (5.08mm) Lead Style Straight	Mounting Type	Through Hole
Height - Seated (Max)0.300" (7.62mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Package / Case	Radial
Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Size / Dimension	0.290" L x 0.090" W (7.37mm x 2.29mm)
Lead Spacing0.200" (5.08mm)Lead StyleStraight	Height - Seated (Max)	0.300" (7.62mm)
Lead Style Straight	Thickness (Max)	-
· · ·	Lead Spacing	0.200" (5.08mm)
Report errors?	Lead Style	Straight
		Report errors?

M39014/02-1419 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

M39014/02-1419 Payment Methods



M39014/02-1419 Shipping Methods



If you have any question about M39014/02-1419, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com