

M80-4103401

st a Quote

M80-4103401 Information

		N/00 /1100/01	
Heisener.com	Part Number	M80-4103401	
	Manufacturer	Harwin Inc.	
	Category	Connectors, Interconnects	
		Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	17+17 WAY FEMALE PC TAIL 3MM	- SET
	Package	-	
For Reference Only		For the pricing/inventory/lead time, please contact	
		us	
		Website: https://www.heisener.com	Reque
		E-mail: salesdept@heisener.com	

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



M80-4103401 Specifications

Manufacturer Part Number M80-4103401 Manufacturer Harwin Inc. Category Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets Package - Series Datamate J-Tek Connector Type Receptacle Contact Type Receptacle Contact Type Female Socket Style Board to Board or Cable Number of Positions 34 Number of Positions Loaded All Pitch - Mating 0.079" (2.00mn) Number of Rows 2 Restanting Type Through Hole Mounting Type Solder Contact Finish - Mating Gold Contact Finish - Mating Gold Contact Finish Thickness - Mating Iguin (0.30µm) Insulation Height 0.205" (5.20µm) Insulation Height 0.205" (5.20µm) Contact Length - Post Ill8" (3.00µm) Material Flaamability Rating UL94 V-0		
Category Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets Package - Series Datamate J-Tek Connector Type Receptacle Contact Type Female Socket Style Board to Board or Cable Number of Positions 34 Number of Positions Loaded All Number of Rows 2 Row Spacing - Mating 0.079" (2.00mm) Mounting Type Through Hole Youngh Type Solder Stering Type - Contact Finish - Mating Gold Contact Finish Thickness - Mating Jupi (0.30µm) Insulation Color Black Insulation Fleight 0.205" (5.20mm) Contact Length - Post 0.118" (3.00mm)	Manufacturer Part Number	M80-4103401
Package-SeriesDatamate J-TekConnector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of PositionsAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - MatingSolderMounting Type-TerminationSolderFastening Type-Contact Finish - Mating0.079" (2.00mm)Mounting TypeBoard to Board or CableMounting Type-SolderSolderFinish Thickness - Mating1.14" (0.30µm)Insulation ColorBlackInsulation Height0.205" (5.20mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-55°C ~ 125°C	Manufacturer	Harwin Inc.
Package-SeriesDatanate J-TekConnector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions34Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSolderFastening Type-Contact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorIlackInsulation Finish Thickness - MatingJackInsulation Finish - Mating0.205" (5.20mm)Contact Finish Thickness - MatingJackInsulation Height0.050" (5.20mm)Contact Finish Thickness - MatingSolder </td <td>Category</td> <td>Connectors, Interconnects</td>	Category	Connectors, Interconnects
SeriesDatamate J-TekConnector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions34Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSolderFastening Type-Contact Finish - MatingGoldContact Finish - Mating1.2µin (0.3µm)Insulation ColorBlackInsulation Height0.205" (5.20mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-55°C ~ 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions34Number of Positions LoadedAllNumber of Rows0.079" (.00mm)Number of Rows0.079" (.00mm)Row Spacing - Mating0.079" (.00mm)Mounting Type10079" (.00mm)TerminationSolderContact Finish - MatingSolderContact Finish - MatingGoldInsulation ColorJakaInsulation Height0.20s" (5.20mm)Contact Length - Post0.118" (3.00mm)Contact Finish Post0.118" (3.00mm)	Package	-
Contact TypeFenale SocketStyleBoard to Board or CableNumber of Positions34Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening Type-Contact Finish - MatingGoldInsulation ColorBlackInsulation Height0.205" (5.20mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-55°C ~ 125°C	Series	Datamate J-Tek
StyleBoard to Board or CableNumber of Positions34Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSolderFastening Type-Contact Finish - MatingGoldContact Finish Thickness - Mating12µin (0.30µm)Insulation Height0.205" (5.20mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-55°C ~ 125°C	Connector Type	Receptacle
Number of Positions 34 Number of Positions Loaded All Pitch - Mating 0.079" (2.00mm) Number of Rows 2 Row Spacing - Mating 0.079" (2.00mm) Mounting Type 0.079" (2.00mm) Termination 0.079" (2.00mm) Termination Solder Fastening Type - Contact Finish - Mating Gold Contact Finish Thickness - Mating 12µin (0.30µm) Insulation Color Black Insulation Height 0.205" (5.20mm) Contact Length - Post 0.118" (3.00mm) Operating Temperature -55°C ~ 125°C	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening Type-Contact Finish - MatingGoldContact Finish Thickness - MatingI2µin (0.30µm)Insulation ColorBlackInsulation Height0.205" (5.20mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-55°C ~ 125°C	Style	Board to Board or Cable
Pitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening Type-Contact Finish - MatingGoldContact Finish Thickness - Mating12µin (0.30µm)Insulation ColorBlackInsulation Height0.205" (5.20mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-55°C ~ 125°C	Number of Positions	34
Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening Type-Contact Finish - MatingGoldContact Finish Thickness - Mating12µin (0.30µm)Insulation ColorBlackInsulation Height0.205" (5.20mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	All
Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening Type-Contact Finish - MatingGoldContact Finish Thickness - Mating12µin (0.30µm)Insulation ColorBlackInsulation Height0.205" (5.20mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-55°C ~ 125°C	Pitch - Mating	0.079" (2.00mm)
Mounting TypeThrough HoleTerminationSolderFastening Type-Contact Finish - MatingGoldContact Finish Thickness - Mating12µin (0.30µm)Insulation ColorBlackInsulation Height0.205" (5.20mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-55°C ~ 125°C	Number of Rows	2
TerminationSolderFastening Type-Contact Finish - MatingGoldContact Finish Thickness - Mating12µin (0.30µm)Insulation ColorBlackInsulation Height0.205" (5.20mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	0.079" (2.00mm)
Fastening Type-Contact Finish - MatingGoldContact Finish Thickness - Mating12µin (0.30µm)Insulation ColorBlackInsulation Height0.205" (5.20mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-55°C ~ 125°C	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating12µin (0.30µm)Insulation ColorBlackInsulation Height0.205" (5.20mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-55°C ~ 125°C	Termination	Solder
Contact Finish Thickness - Mating12µin (0.30µm)Insulation ColorBlackInsulation Height0.205" (5.20mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-55°C ~ 125°C	Fastening Type	-
Insulation ColorBlackInsulation Height0.205" (5.20mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold
Insulation Height 0.205" (5.20mm) Contact Length - Post 0.118" (3.00mm) Operating Temperature -55°C ~ 125°C	Contact Finish Thickness - Mating	12µin (0.30µm)
Contact Length - Post0.118" (3.00mm)Operating Temperature-55°C ~ 125°C	Insulation Color	Black
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.205" (5.20mm)
	Contact Length - Post	0.118" (3.00mm)
Material Flammability Rating UL94 V-0	Operating Temperature	-55°C ~ 125°C
	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin-Lead
Mated Stacking Heights	7.3mm, 7.55mm
Ingress Protection	-
Features	Mating Flange, Polarizing Key

Report errors?

M80-4103401 Guarantees




Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

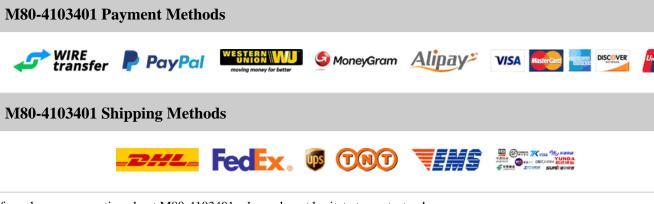

If you have any question about M80-4103401, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com