

M80-4120601

t a Quote

M80-4120601 Information

Heisener.com	Part Number	M80-4120601
	Manufacturer	Harwin Inc.
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets
	Description	3+3 WAY FEMALE SMT + WO J/S
	Package	-
For Reference Only		For the pricing/inventory/lead time, please contact us
		Website: https://www.heisener.com E-mail: salesdept@heisener.com

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



M80-4120601 Specifications

Manufacturer Part Number	M80-4120601
Manufacturer	Harwin Inc.
Category	Connectors, Interconnects
	Rectangular Connectors - Headers, Receptacles, Female Sockets
Package	-
Series	Datamate J-Tek
Connector Type	Receptacle
Contact Type	Female Socket
Style	Board to Board or Cable
Number of Positions	6
Number of Positions Loaded	All
Pitch - Mating	0.079" (2.00mm)
Number of Rows	2
Row Spacing - Mating	0.079" (2.00mm)
Mounting Type	Surface Mount
Termination	Solder
Fastening Type	-
Contact Finish - Mating	Gold
Contact Finish Thickness - Mating	12µin (0.30µm)
Insulation Color	Black
Insulation Height	0.220" (5.60mm)
Contact Length - Post	-
Operating Temperature	-55°C ~ 125°C
Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin-Lead
Mated Stacking Heights	7.7mm, 7.95mm
Ingress Protection	-
Features	Mating Flange, Polarizing Key

Report errors?

M80-4120601 Guarantees




Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

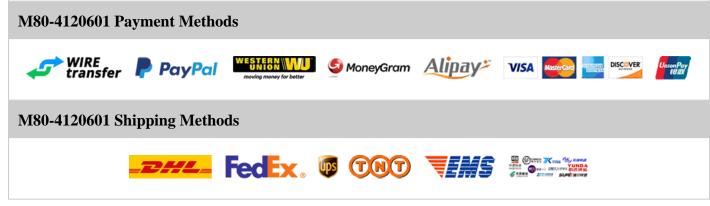

If you have any question about M80-4120601, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com