


MBB02070C2200DC100

MBB02070C2200DC100 Information

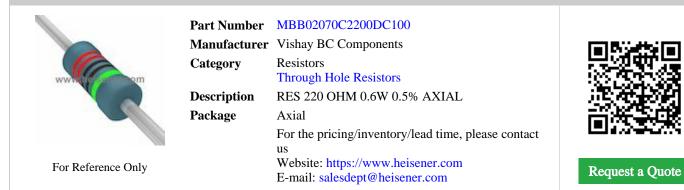

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



MBB02070C2200DC100 Specifications

ManufacturerVishay BC ComponentsCategoryResistorsThrough Hole ResistorsPackageAxialScriesMBB/SMA 0207 - ProfessionalResistance220 OhmsTolerance±0.5%Power (Watts)0.6WCompositionThin FilmFeatures-Temperature Coefficient±50pm/°COperating Temperature-55°C ~ 155°CPackage / CaseAxialSupplier Device Package0.098" Dia x 0.256" L (2.50mm x 6.50mm)Height - Seated (Max)-Yumber of Terminations2Failure Rate-Failure Rate-Failure Rate-Stare (Max)-Stare (Max		
CategoryResistorsThrough Hole ResistorsPackageAxialSeriesMBB/SMA 0207 - ProfessionalResistance220 OhmsTolerance±0.5%Power (Watts)0.6WCompositionThin FilmFeatures-Tomperature Coefficient±50pm/°COperating Temperature-55°C ~ 155°CPackage / CaseAxialSupplier Device Package.Size / Dimension0.098" Dia x 0.256" L (2.50mm x 6.50mm)Height - Seated (Max).Failure Rate.Failure	Manufacturer Part Number	MBB02070C2200DC100
Through Hole ResistorsPackageAxialSeriesMBB/SMA 0207 - ProfessionalResistance220 OhmsTolerance±0.5%Power (Watts)0.6WCompositionThin FilmFeatures-Temperature Coefficient±50pm/°COperating Temperature-55°C ~ 155°CPackage / CaseAxialSupplier Device Package-Size / Dimension0.098" Dia x 0.256" L (2.50mm x 6.50mm)Height - Seated (Max)2Failure Rate-Failure Rat	Manufacturer	Vishay BC Components
PackageAxialSeriesMBB/SMA 0207 - ProfessionalResistance220 OhmsTolerance±0.5%Power (Watts)0.6WCompositionThin FilmFeatures-Temperature Coefficient±50ppm/°COperating Temperature-55°C ~ 155°CPackage / CaseAxialSupplier Device Package-Size / Dimension0.098" Dia x 0.256" L (2.50mm x 6.50mm)Height - Seated (Max)2Failure Rate-	Category	Resistors
Series MBB/SMA 0207 - Professional Series 220 Ohms Resistance 220 Ohms Tolerance ±0.5% Power (Watts) 0.6W Composition Thin Film Features - Temperature Coefficient ±50ppm/°C Operating Temperature -55°C ~ 155°C Package / Case Axial Supplier Device Package - Size / Dimension 0.098° Dia x 0.256° L (2.50mm x 6.50mm) Height - Seated (Max) 2 Failure Rate -		Through Hole Resistors
Resistance220 OhmsTolerance±0.5%Power (Watts)0.6WCompositionThin FilmFeatures-Temperature Coefficient±50ppm°COperating Temperature-55°C ~ 155°CPackage / CaseAxialSupplier Device Package-Size / Dimension0.098" Dia x 0.256" L (2.50mm x 6.50mm)Height - Seated (Max)-Staff Carentinations2Failure Rate-	Package	Axial
Tolerance±0.5%Power (Watts)0.6WCompositionThin FilmFeatures-Temperature Coefficient±50pm/°COperating Temperature-55°C ~ 155°CPackage / CaseAxialSupplier Device Package-Size / Dimension0.098" Dia x 0.256" L (2.50mm x 6.50mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Series	MBB/SMA 0207 - Professional
Power (Watts)0.6WCompositionThin FilmFeatures-Temperature Coefficient±50pm/°COperating Temperature-55°C ~ 155°CPackage / CaseAxialSupplier Device Package-Size / Dimension0.098" Dia x 0.256" L (2.50mm x 6.50mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Resistance	220 Ohms
CompositionThin FilmFeatures-Temperature Coefficient±50pm/°COperating Temperature-55°C ~ 155°CPackage / CaseAxialSupplier Device Package-Size / Dimension0.098" Dia x 0.256" L (2.50mm x 6.50mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Tolerance	$\pm 0.5\%$
Features-Temperature Coefficient±50ppm/°COperating Temperature-55°C ~ 155°CPackage / CaseAxialSupplier Device Package-Size / Dimension0.098" Dia x 0.256" L (2.50mm x 6.50mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Power (Watts)	0.6W
Temperature Coefficient±50ppm/°COperating Temperature-55°C ~ 155°CPackage / CaseAxialSupplier Device Package-Size / Dimension0.098" Dia x 0.256" L (2.50mm x 6.50mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Composition	Thin Film
Operating Temperature-55°C ~ 155°CPackage / CaseAxialSupplier Device Package-Size / Dimension0.098" Dia x 0.256" L (2.50mm x 6.50mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Features	-
Package / CaseAxialSupplier Device Package-Size / Dimension0.098" Dia x 0.256" L (2.50mm x 6.50mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Temperature Coefficient	±50ppm/°C
Supplier Device Package-Size / Dimension0.098" Dia x 0.256" L (2.50mm x 6.50mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Operating Temperature	-55°C ~ 155°C
Size / Dimension0.098" Dia x 0.256" L (2.50mm x 6.50mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Package / Case	Axial
Height - Seated (Max)-Number of Terminations2Failure Rate-	Supplier Device Package	-
Number of Terminations 2 Failure Rate -	Size / Dimension	0.098" Dia x 0.256" L (2.50mm x 6.50mm)
Failure Rate -	Height - Seated (Max)	-
	Number of Terminations	2
Report errors?	Failure Rate	-
		Report errors?

MBB02070C2200DC100 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

MBB02070C2200DC100 Payment Methods



If you have any question about MBB02070C2200DC100, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com