


MKP383230200JFM2B0

MKP383230200JFM2B0 Information



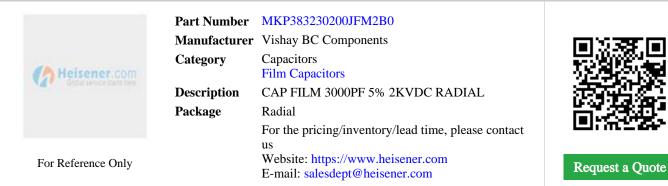

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



MKP383230200JFM2B0 Specifications

Manufacturer Part NumberMKP383230200JFM2B0Manufacturer QVishay BC ComponentsCategoryCapacitorsFilm CapacitorsFilm CapacitorsPackageRadialSeriesMMKP383Capacitance3000pFTolerance5%Voltage Rating - AC700VVoltage Rating - DC900y CkV)Dielectric MaterialPolypropylene (PP), MetallizedDielectric Material-Opranting Temperature-5% C 105°CMouning TypeRadialSize / Dimension0.68% L x 0.236° W (17.50mm x 6.00mm)Height - Seated (Max)0.69% L x 0.236° W (17.50mm x 6.00mm)Lead Spacing0.591° (15.00mm)Lead SpacingGeneral PurposeFeatures-Catego CaseSent Purpose		
Category Capacitors Film Capacitors Package Radial Series MMKP383 Capacitance 3000pF Tolerance ±5% Voltage Rating - AC 700V Voltage Rating - DC 2000V (2kV) Dielectric Material Polyproplene (PP), Metallized Spreading Temperature - Operating Type Through Hole Package / Case Radial Size / Dimension 0.689" L x 0.236" W (17.50mm x 6.00mm) Height - Seated (Max) 0.472" (12.00mm) Termination PC Pins Lead Spacing 0.591" (15.00mm) Applications General Purpose	Manufacturer Part Number	MKP383230200JFM2B0
Fin CapacitorsPackageRadialSeriesMMKP383Capacitance3000pFTolerance±5%Voltage Rating - AC700VVoltage Rating - DC2000V (2kV)Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.236" W (17.50mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)TerminationS59°L x 0.236" W (17.50mm x 6.00mm)Lead Spacing0.591" (15.00mm)ApplicationsGeneral PurposeFeatures-	Manufacturer	Vishay BC Components
PackageRadialSeriesMMKP383Capacitance3000pFTolerance±5%Voltage Rating - AC700VVoltage Rating - DC2000V (2kV)Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature55°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.236" W (17.50mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)Lead Spacing0.591" (15.00mm)ApplicationsGeneral PurposeFeatures-	Category	Capacitors
SeriesMMKP383Capacitance3000pFTolerance±5%Voltage Rating - AC700VVoltage Rating - DC2000V (2kV)Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 105°CMounting TypeRadialPackage / CaseRadialSize / Dimension0.689" L x 0.236" W (17.50mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsGeneral PurposeFeatures-		Film Capacitors
Capacitance3000pFTolerance±5%Voltage Rating - AC70VVoltage Rating - DC2000V (2kV)Dielectric MaterialPolyproplene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 105°CMounting TypeRatialPackage / CaseRadialSize / Dimension0.689" L x 0.236" W (17.50mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)Lead Spacing0.591" (15.00mm)ApplicationsGeneral PurposeFeatures-	Package	Radial
Tolerance±5%Voltage Rating - AC700VVoltage Rating - DC2000V (2kV)Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.236" W (17.50mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsGeneral PurposeFeatures-	Series	MMKP383
NoticeDiscreteVoltage Rating - AC700VVoltage Rating - DC2000V (2kV)Dielectric MaterialPolyproplene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.236" W (17.50mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsGeneral PurposeFeatures-	Capacitance	3000pF
Voltage Rating - DC2000V (2kV)Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.236" W (17.50mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)Termination0.591" (15.00mm)Lead Spacing0.591" (15.00mm)ApplicationsGeneral PurposeFeatures-	Tolerance	±5%
Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.236" W (17.50mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsGeneral PurposeFeatures-	Voltage Rating - AC	700V
ESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.236" W (17.50mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsGeneral PurposeFeatures-	Voltage Rating - DC	2000V (2kV)
Operating Temperature-55°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.236" W (17.50mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsGeneral PurposeFeatures-	Dielectric Material	Polypropylene (PP), Metallized
Nounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.236" W (17.50mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsGeneral PurposeFeatures-	ESR (Equivalent Series Resistance)	-
Package / CaseRadialSize / Dimension0.689" L x 0.236" W (17.50mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsGeneral PurposeFeatures-	Operating Temperature	-55°C ~ 105°C
Size / Dimension 0.689" L x 0.236" W (17.50mm x 6.00mm) Height - Seated (Max) 0.472" (12.00mm) Termination PC Pins Lead Spacing 0.591" (15.00mm) Applications General Purpose Features -	Mounting Type	Through Hole
Height - Seated (Max)0.472" (12.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsGeneral PurposeFeatures-	Package / Case	Radial
TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsGeneral PurposeFeatures-	Size / Dimension	0.689" L x 0.236" W (17.50mm x 6.00mm)
Lead Spacing0.591" (15.00mm)ApplicationsGeneral PurposeFeatures-	Height - Seated (Max)	0.472" (12.00mm)
ApplicationsGeneral PurposeFeatures-	Termination	PC Pins
Features -	Lead Spacing	0.591" (15.00mm)
	Applications	General Purpose
Report errors?	Features	-
		Report errors?

MKP383230200JFM2B0 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

DISCOVER

MKP383230200JFM2B0 Payment Methods



MKP383230200JFM2B0 Shipping Methods



If you have any question about MKP383230200JFM2B0, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com