


# MKP383318200JIM2T0

#### MKP383318200JIM2T0 Information



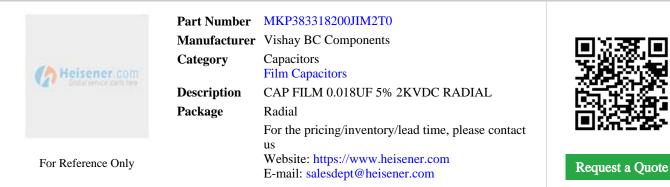

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## MKP383318200JIM2T0 Specifications

Manufacturer Part Number MKP383318200JIM2T0   Manufacturer Vishay BC Components   Category Capacitors   Film Capacitors Film Capacitors   Package Radial   Series MMKP3833   Capacitance 0.018µF   Tolerance ±5%   Voltage Rating - AC 700V   Voltage Rating - DC 2000V (2kV)   Dielectric Material Polypropylene (PP), Metallized   FSR (Equivalent Series Resistance) -   Operating Temperature 55°C ~ 105°C   Mounting Type Through Hole   Package / Case Radial   Size / Dimension 1.024" L x 0.335" W (26.00mm x 8.50mm)   Height - Seated (Max) 0.09" (18.00mm)   Termination PC Pins   Lead Spacing 0.88" (22.50mm)   Applications General Purpose		
CategoryCapacitorsPackageRadialPackageRadialSeriesMMKP383Capacitance0.018 µFTolerance±5%Voltage Rating - AC700VVoltage Rating - DC2000V (2kV)Dielectric MaterialPolyproplene (PP), MetallizedSR (Equivalent Series Resistance)-Operating Temperature55°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.335" W (26.00mm x 8.50mm)Height - Seated (Max)0.709" (18.00mm)TerminationPC PinsLead Spacing0.886" (22.50mm)ApplicationsGeneral PurposeFeatures-	Manufacturer Part Number	MKP383318200JIM2T0
Fin CapacitorsPackageRadialSeriesMMKP383Capacitance0.018µFTolerance±5%Voltage Rating - AC700VVoltage Rating - DC2000V (2kV)Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialKize / Dimension1.024" L x 0.335" W (26.00mm x 8.50mm)Height - Seated (Max)0.709" (18.00mm)TerminationPC PinsLead Spacing0.886" (22.50mm)ApplicationsGeneral PurposeFeatures-	Manufacturer	Vishay BC Components
PackageRadialSeriesMMKP383Capacitance0.018µFTolerance±5%Voltage Rating - AC700VVoltage Rating - DC2000V (2kV)Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 105°CMounting TypeRadialSize / Dinension1.024" L x 0.335" W (26.00mm x 8.50mm)Height - Seated (Max)0.709" (18.00mm)Lead Spacing0.886" (22.50mm)ApplicationsGeneral PurposeFeatures-	Category	Capacitors
SeriesMMKP383Capacitance0.018µFTolerance±5%Voltage Rating - AC700VVoltage Rating - DC2000V (2kV)Dielectric MaterialPolyproplene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.335" W (26.00mm x 8.50mm)Height - Seated (Max)0.709" (18.00mm)FerminationPC PinsLead Spacing0.886" (22.50mm)ApplicationsGeneral PurposeFeatures-		Film Capacitors
Capacitance0.018µFTolerance±5%Voltage Rating - AC700VVoltage Rating - DC2000V (2kV)Dielectric MaterialPolyropylene (PP), MetallizedDielectric Material-Operating Temperature-55°C ~ 105°CMounting TypeRadialSize / Dimension1.024" L x 0.335" W (26.00mm x 8.50mm)Height - Seated (Max)O70" (18.00mm)TerminationPC PinsLead Spacing0.886" (22.50mm)ApplicationsGeneral PurposeFeatures-	Package	Radial
Tolerance±5%Voltage Rating - AC700VVoltage Rating - DC2000V (2kV)Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.335" W (26.00mm x 8.50mm)Height - Seated (Max)0.709" (18.00mm)TerminationPC PinsLead Spacing0.886" (22.50mm)ApplicationsGeneral PurposeFeatures-	Series	MMKP383
Voltage Rating - AC700VVoltage Rating - DC2000V (2kV)Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.335" W (26.00mm x 8.50mm)Height - Seated (Max)0.709" (18.00mm)TerminationPC PinsLead Spacing0.886" (22.50mm)ApplicationsGeneral PurposeFeatures-	Capacitance	0.018µF
Voltage Rating - DC2000V (2kV)Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.335" W (26.00mm x 8.50mm)Height - Seated (Max)0.709" (18.00mm)TerminationPC PinsLead Spacing0.886" (22.50mm)ApplicationsGeneral PurposeFeatures-	Tolerance	±5%
Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.335" W (26.00mm x 8.50mm)Height - Seated (Max)0.709" (18.00mm)TerminationPC PinsLead Spacing0.886" (22.50mm)ApplicationsGeneral PurposeFeatures-	Voltage Rating - AC	700V
ESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.335" W (26.00mm x 8.50mm)Height - Seated (Max)0.709" (18.00mm)TerminationPC PinsLead Spacing0.886" (22.50mm)ApplicationsGeneral PurposeFeatures-	Voltage Rating - DC	2000V (2kV)
Operating Temperature-55°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.335" W (26.00mm x 8.50mm)Height - Seated (Max)0.709" (18.00mm)TerminationPC PinsLead Spacing0.886" (22.50mm)ApplicationsGeneral PurposeFeatures-	Dielectric Material	Polypropylene (PP), Metallized
Nounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.335" W (26.00mm x 8.50mm)Height - Seated (Max)0.709" (18.00mm)TerminationPC PinsLead Spacing0.886" (22.50mm)ApplicationsGeneral PurposeFeatures-	ESR (Equivalent Series Resistance)	-
Package / CaseRadialSize / Dimension1.024" L x 0.335" W (26.00mm x 8.50mm)Height - Seated (Max)0.709" (18.00mm)TerminationPC PinsLead Spacing0.886" (22.50mm)ApplicationsGeneral PurposeFeatures-	Operating Temperature	-55°C ~ 105°C
Size / Dimension 1.024" L x 0.335" W (26.00mm x 8.50mm)   Height - Seated (Max) 0.709" (18.00mm)   Termination PC Pins   Lead Spacing 0.886" (22.50mm)   Applications General Purpose   Features -	Mounting Type	Through Hole
Height - Seated (Max)0.709" (18.00mm)TerminationPC PinsLead Spacing0.886" (22.50mm)ApplicationsGeneral PurposeFeatures-	Package / Case	Radial
TerminationPC PinsLead Spacing0.886" (22.50mm)ApplicationsGeneral PurposeFeatures-	Size / Dimension	1.024" L x 0.335" W (26.00mm x 8.50mm)
Lead Spacing0.886" (22.50mm)ApplicationsGeneral PurposeFeatures-	Height - Seated (Max)	0.709" (18.00mm)
ApplicationsGeneral PurposeFeatures-	Termination	PC Pins
Features -	Lead Spacing	0.886" (22.50mm)
	Applications	General Purpose
Report errors?	Features	-
Report envis.		Report errors?

### MKP383318200JIM2T0 Guarantees



**Quality Guarantees** 

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

#### MKP383318200JIM2T0 Payment Methods





If you have any question about MKP383318200JIM2T0, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com