


MKP385230250JIM2T0

MKP385230250JIM2T0 Information

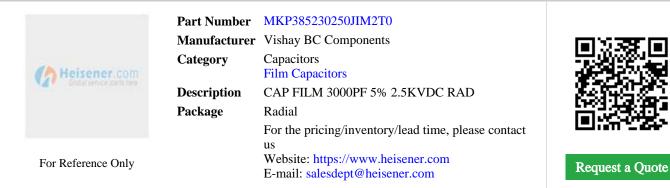

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



MKP385230250JIM2T0 Specifications

Manufacturer Vishay BC Components Category Capacitors Film Capacitors Film Capacitors Package Radial Series MKP385 Capacitance 3000pF Tolerance ±5% Voltage Rating - AC 900V Voltage Rating - DC 2500V (2.5kV) Dielectric Material Polypropylene (PP), Metallized Coperating Temperature -55°C ~ 110°C Mounting Type Through Hole Package / Case Radial Size / Dimension 1.024" L x 0.236"W (26.00mm x 6.00mm) Height - Seated (Max) 0.472" (12.00mm)		
CategoryCapacitorsFilm CapacitorsPackageRadialPackageMKP385Capacitance3000pFTolerance±5%Voltage Rating - AC900VVoltage Rating - DC2500V (2.5kV)Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.236" W (26.00mm x 6.00mm)Height - Seated (Max)OP Fins	Manufacturer Part Number	MKP385230250JIM2T0
Film CapacitorsPackageRadialSeriesMKP385Capacitance3000pFTolerance±5%Voltage Rating - AC900VVoltage Rating - DC2500V (2.5kV)Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.236" W (26.00mm x 6.00mm)Height - Seated (Max)OC Pins	Manufacturer	Vishay BC Components
PackageRadialSeriesMKP385Capacitance3000pFTolerance±5%Voltage Rating - AC900VVoltage Rating - DC2500V (2.5kV)Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.236" W (26.00mm x 6.00mm)Height - Seated (Max)O472" (12.00mm)PerminationPC Pins	Category	Capacitors
Series MKP385 Capacitance 3000pF Tolerance ±5% Voltage Rating - AC 900V Voltage Rating - DC 2500V (2.5kV) Dielectric Material Polypropylene (PP), Metallized ESR (Equivalent Series Resistance) - Operating Temperature -55°C ~ 110°C Mounting Type Through Hole Package / Case Radial Size / Dimension 1.024° L x 0.236° W (26.00mm x 6.00mm) Height - Seated (Max) 0.472° (12.00mm)		Film Capacitors
Capacitance3000pFTolerance±5%Voltage Rating - AC900VVoltage Rating - DC2500V (2.5kV)Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.236" W (26.00mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)PerminationPC Pins	Package	Radial
Tolerance±5%Voltage Rating - AC900VVoltage Rating - DC2500V (2.5kV)Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.236" W (26.00mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)PC PinsPC Pins	Series	MKP385
Voltage Rating - AC900VVoltage Rating - DC2500V (2.5kV)Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.236" W (26.00mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)PC PinsPC Pins	Capacitance	3000pF
Voltage Rating - DC2500V (2.5kV)Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.236" W (26.00mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)PC PinsPC Pins	Tolerance	$\pm 5\%$
Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.236" W (26.00mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)PerminationPC Pins	Voltage Rating - AC	900V
ESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.236" W (26.00mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)PerminationPC Pins	Voltage Rating - DC	2500V (2.5kV)
Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.236" W (26.00mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)FerminationPC Pins	Dielectric Material	Polypropylene (PP), Metallized
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.236" W (26.00mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)FerminationPC Pins	ESR (Equivalent Series Resistance)	-
Package / CaseRadialSize / Dimension1.024" L x 0.236" W (26.00mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)TerminationPC Pins	Operating Temperature	-55°C ~ 110°C
Size / Dimension 1.024" L x 0.236" W (26.00mm x 6.00mm) Height - Seated (Max) 0.472" (12.00mm) Termination PC Pins	Mounting Type	Through Hole
Height - Seated (Max)0.472" (12.00mm)TerminationPC Pins	Package / Case	Radial
Termination PC Pins	Size / Dimension	1.024" L x 0.236" W (26.00mm x 6.00mm)
	Height - Seated (Max)	0.472" (12.00mm)
Lead Spacing 0.886" (22.50mm)	Termination	PC Pins
	Lead Spacing	0.886" (22.50mm)
Applications DC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DT	Applications	DC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DT
Features -	Features	-
Report errors?		Report errors?

MKP385230250JIM2T0 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

MKP385230250JIM2T0 Payment Methods





If you have any question about MKP385230250JIM2T0, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com