


MKP385233085JCI2B0

MKP385233085JCI2B0 Information

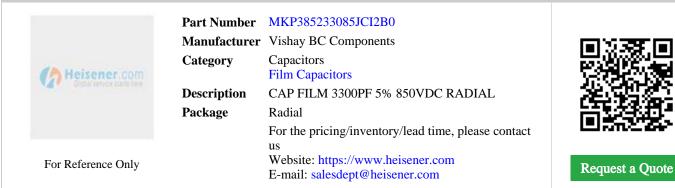

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



MKP385233085JCI2B0 Specifications

Manufacturer Part NumberMKP385233085JC12B0ManufacturerVishay BC ComponentsCategoryCapacitorsFilm CapacitorsFilm CapacitorsPackageRadialSeriesMKP385Capacitance3300pFTolerance45%Voltage Rating - AC300VVoltage Rating - DC850VDielectric MaterialPolypropylene (PP), MetallizedDietarting Fereneum-5°C ~ 110°CMonting TypeFilm CapacitonSize / Dimension-Size / Dimension-Height - Seated (Max)-Lead Spacing0295° (7.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-		
CategoryCapacitorsFilm CapacitorsPackageRadialSeriesMKP385Capacitance300pFTolerance±5%Voltage Rating - AC300VVoltage Rating - DC850VDielectric MaterialPolyropylene (PP), MetallizedDierange-Operating Temperature-55°C ~ 110°CMounting TypeRadialSiz / Dimension-Height - Seated (Max)-Siz / Dimension-Height - Seated (Max)-ApplicationsD295" (7.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Manufacturer Part Number	MKP385233085JCI2B0
Film CapacitorsPackageRadialSeriesMKP385Capacitance3300pFTolerance±5%Voltage Rating - AC300VVoltage Rating - DC850VDielectric MaterialPolyropylene (PP), MetallizedDielectric Material-Operating Temperature-5°C ~ 110°CMunting TypeRadialSize / Dimension-Size / Dimension-Height - Seated (Max)-Lead Spacing-Aplications-Applications	Manufacturer	Vishay BC Components
PackageRadialSeriesMKP385Capacitance3300pFTolerance±5%Voltage Rating - AC300VVoltage Rating - DC850VDielectric MaterialPolyproplene (PP), MetallizedDielectric Material-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension-Height - Seated (Max)-Lead Spacing025°(7.50mm)ApplicationsClink, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Category	Capacitors
Series MKP385 Capacitance 3300pF Tolerance ±5% Voltage Rating - AC 300V Voltage Rating - DC 850V Dielectric Material Polypropylene (PP), Metallized Dielectric Material - Operating Temperature -55°C ~ 110°C Mounting Type Through Hole Package / Case Radial Size / Dimension - Height - Seated (Max) - Lead Spacing 0.295" (7.50mm) Applications DC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DT Features -		Film Capacitors
Capacitance3300pFTolerance±5%Voltage Rating - AC300VVoltage Rating - DC850VDielectric MaterialPolyproplene (PP), MetallizedDielectric Material-SSR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeRadialPackage / CaseRadialSize / Dimension-Height - Seated (Max)-PerminationCP insLead Spacing0.295" (7.50mm)Applications-Features-	Package	Radial
Tolerance±5%Yoltage Rating - AC300VVoltage Rating - DC850VDielectric MaterialPolyproplene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension-Height - Seated (Max)-TerminationDC PinsLead Spacing0.295°(7.50mm)Applications-Features-Start Pines-Applications-Start Pines-Start Pines-	Series	MKP385
Voltage Rating - AC300VVoltage Rating - DC850VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension-Height - Seated (Max)-PerminationDC PinsLead Spacing0.295" (7.50mm)Applications-Features-	Capacitance	3300pF
Voltage Rating - DC850VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension-Height - Seated (Max)-TerminationPC PinsLead Spacing0.295" (7.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Tolerance	±5%
Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension-Height - Seated (Max)-TerminationPC PinsLead Spacing0.295" (7.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Voltage Rating - AC	300V
ESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension-Height - Seated (Max)-TerminationPC PinsLead Spacing0.295" (7.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Voltage Rating - DC	850V
Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension-Height - Seated (Max)-TerminationPC PinsLead Spacing0.295" (7.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Dielectric Material	Polypropylene (PP), Metallized
Nounting TypeThrough HolePackage / CaseRadialSize / Dimension-Height - Seated (Max)-TerminationPC PinsLead Spacing0.295" (7.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	ESR (Equivalent Series Resistance)	-
Package / CaseRadialSize / Dimension-Height - Seated (Max)-TerminationPC PinsLead Spacing0.295" (7.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Operating Temperature	-55°C ~ 110°C
Size / Dimension-Size / Dimension-Height - Seated (Max)-TerminationPC PinsLead Spacing0.295" (7.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Mounting Type	Through Hole
Height - Seated (Max)-TerminationPC PinsLead Spacing0.295" (7.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Package / Case	Radial
TerminationPC PinsLead Spacing0.295" (7.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Size / Dimension	-
Lead Spacing0.295" (7.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Height - Seated (Max)	-
ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Termination	PC Pins
Features -	Lead Spacing	0.295" (7.50mm)
	Applications	DC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DT
Report errors	Features	-
		Report errors?

MKP385233085JCI2B0 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

DISCOVER

MKP385233085JCI2B0 Payment Methods



MKP385233085JCI2B0 Shipping Methods



If you have any question about MKP385233085JCI2B0, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com