


MKP385313200JIM2T0

MKP385313200JIM2T0 Information

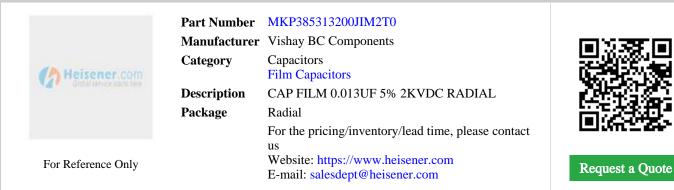

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



MKP385313200JIM2T0 Specifications

ManufacturerVishay BC ComponentsCapacitorsFilm CapacitorsPackageRadialSeriesMKP385Capacitance0.013µFTolerance±5%Voltage Rating - DC000V (2kV)Dielectric MaterialPolypropylene (PP), MetallizedDoperating Temperature-Operating Temperature55°C ~ 110°CPackage / CaseRadialSize / Dimension1.024" L x 0.236" W (26.00mm x 6.00mm)Height - Seated (Max)0.610" (15.50mm)TerminationC PinsLad Spacing0.886" (22.50mm)Applications0.21k, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-		
CategoryCapacitorsFilm CapacitorsPackageRadialSeriesMKP385Capacitance0.013µFTolerance±5%Voltage Rating - AC700VVoltage Rating - DC2000V (2kV)Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.236" W (26.00mm x 6.00mm)Height - Seated (Max)0.610" (15.50mm)TerminationPC PinsLead Spacing0.886" (22.50mm)ApplicationsJC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Manufacturer Part Number	MKP385313200JIM2T0
Fin CapacitorsPackageRadialSeriesMKP385Capacitance0.013µFTolerance±5%Voltage Rating - AC700VVoltage Rating - DC2000V (2kV)Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.236" W (26.00mm x 6.00mm)Height - Seated (Max)0.610" (15.50mm)TerminationPC PinsLead Spacing0.886" (22.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Manufacturer	Vishay BC Components
PackageRadiaSeriesMKP385Capacitance0.013µFTolerance±5%Voltage Rating - AC700VVoltage Rating - DC2000V (2kV)Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.236" W (26.00mm x 6.00mm)Height - Seated (Max)0.610" (15.50mm)TerminationPC PinsLead Spacing0.886" (22.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Category	Capacitors
Series MKP385 Capacitance 0.013µF Tolerance ±5% Voltage Rating - AC 700V Voltage Rating - DC 2000V (2kV) Dielectric Material Polypropylene (PP), Metallized ESR (Equivalent Series Resistance) - Operating Temperature -55°C ~ 110°C Mounting Type Through Hole Package / Case Radial Size / Dimension 1.024" L x 0.236" W (26.00mm x 6.00mm) Height - Seated (Max) 0.610" (15.50mm) Termination PC Pins Lead Spacing 0.886" (22.50mm) Applications DC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DT Features -		Film Capacitors
Capacitance0.013µFTolerance±5%Voltage Rating - AC700VVoltage Rating - DC2000V (2kV)Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.610" (15.50mm)Height - Seated (Max)0.610" (15.50mm)Lead Spacing0.886" (22.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Package	Radial
Tolerance±5%Voltage Rating - AC700VVoltage Rating - DC2000V (2kV)Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.236" W (26.00mm x 6.00mm)Height - Seated (Max)0.610" (15.50mm)TerminationPC PinsLead Spacing0.886" (22.50mm)Applications-Features-	Series	MKP385
Voltage Rating - AC700VVoltage Rating - DC2000V (2kV)Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.236" W (26.00mm x 6.00mm)Height - Seated (Max)0.610" (15.50mm)TerminationPC PinsLead Spacing0.886" (22.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Capacitance	0.013µF
Voltage Rating - DC2000V (2kV)Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.236" W (26.00mm x 6.00mm)Height - Seated (Max)0.610" (15.50mm)TerminationPC PinsLead Spacing0.886" (22.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Tolerance	$\pm 5\%$
Dielectric MaterialPolypropylene (PP), MetallizedDielectric Material-ESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.236" W (26.00mm x 6.00mm)Height - Seated (Max)0.610" (15.50mm)TerminationPC PinsLead Spacing0.886" (22.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Voltage Rating - AC	700V
ESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.236" W (26.00mm x 6.00mm)Height - Seated (Max)0.610" (15.50mm)TerminationPC PinsLead Spacing0.886" (22.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Voltage Rating - DC	2000V (2kV)
Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.236" W (26.00mm x 6.00mm)Height - Seated (Max)0.610" (15.50mm)TerminationPC PinsLead Spacing0.886" (22.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Dielectric Material	Polypropylene (PP), Metallized
Nounting TypeThrough HolePackage / CaseRadialSize / Dimension1.024" L x 0.236" W (26.00mm x 6.00mm)Height - Seated (Max)0.610" (15.50mm)TerminationPC PinsLead Spacing0.886" (22.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	ESR (Equivalent Series Resistance)	-
Package / CaseRadialSize / Dimension1.024" L x 0.236" W (26.00mm x 6.00mm)Height - Seated (Max)0.610" (15.50mm)TerminationPC PinsLead Spacing0.886" (22.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Operating Temperature	-55°C ~ 110°C
Size / Dimension1.024" L x 0.236" W (26.00mm x 6.00mm)Height - Seated (Max)0.610" (15.50mm)TerminationPC PinsLead Spacing0.886" (22.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Mounting Type	Through Hole
Height - Seated (Max)0.610" (15.50mm)TerminationPC PinsLead Spacing0.886" (22.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Package / Case	Radial
TerminationPC PinsLead Spacing0.886" (22.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Size / Dimension	1.024" L x 0.236" W (26.00mm x 6.00mm)
Lead Spacing0.886" (22.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Height - Seated (Max)	0.610" (15.50mm)
ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Termination	PC Pins
Features -	Lead Spacing	0.886" (22.50mm)
	Applications	DC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DT
Report errors?	Features	-
		Report errors?

MKP385313200JIM2T0 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

DISCOVER

MKP385313200JIM2T0 Payment Methods





If you have any question about MKP385313200JIM2T0, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com