

MKP385318085JFI2B0

MKP385318085JFI2B0 Information

Heisener.com	Part Number Manufacturer Category Description Package	MKP385318085JFI2B0 Vishay BC Components Capacitors Film Capacitors CAP FILM 0.018UF 5% 850VDC RAD Radial For the pricing/inventory/lead time, please contact	
For Reference Only		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



MKP385318085JFI2B0 Specifications

ManufacturerVishay BC ComponentsCapacitorsFilm CapacitorsPackageRadialSeriesMKP385Capacitance0018µFVoltage Rating - DC300VVoltage Rating - DC550VDielectric Material-Operating Temperature-55°C ~ 110°CVoltage / CaseRadialSiz / Dimension1680° L x 0.197° W (1.50mm x 5.00mm)Package / Case0.689° L x 0.197° W (1.50mm x 5.00mm)Pachage / Case0.433° (1.00mm)Height - Seated (Max)0.59° (1500mm)Applications0.59° (1500mm)Lead Spacing0.59° (1500mm)Lead Spacing0.59° (1500mm)Applications0.50° (1500mm)Case0.59° (1500mm)Case0.50° (1500mm)Case <t< th=""><th></th><th></th></t<>		
Category Capacitors Film Capacitors Film Capacitors Package Radial Series MKP385 Capacitance 0.018µF Tolerance ±5% Voltage Rating - AC 300V Voltage Rating - DC 850V Dielectric Material Polypropylene (PP), Metallized Series Resistance) - Operating Temperature -55°C ~ 110°C Mounting Type Through Hole Size / Dimension 0.689° L x 0.197° W (17.50mm x 5.00mm) Height - Seated (Max) 0.433° (11.00mm) PC Pins 5.91° (15.00mm) Lead Spacing 0.591° (15.00mm) Applications DC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DT Features -	Manufacturer Part Number	MKP385318085JFI2B0
Film CapacitorsPackageRadialSeriesMKP385Capacitance0.018µFTolerance±5%Voltage Rating - AC300VVoltage Rating - DC850VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.197" W (17.50mm x 5.00mm)Height - Seated (Max)0.591" (15.00mm)Lead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Manufacturer	Vishay BC Components
PackageRadialSeriesMKP385Capacitance0.018µFTolerance±5%Voltage Rating - AC300VVoltage Rating - DC850VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689° L x 0.197° W (17.50mm x 5.00mm)Height - Seated (Max)0.433° (11.00mm)TerminationC9PrinsApplications0.591° I (15.00mm)ApplicationsD C Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Category	Capacitors
Series MKP385 Capacitance 0.018µF Tolerance ±5% Voltage Rating - AC 300V Voltage Rating - DC 850V Dielectric Material Polypropylene (PP), Metallized DSR (Equivalent Series Resistance) - Operating Temperature -55°C ~ 110°C Mounting Type Through Hole Package / Case Radial Size / Dinension 0.433" (11.00mm) Height - Seated (Max) 0.491" (15.00mm) Applications Soly1" (15.00mm) Features -		Film Capacitors
Capacitance0.018µFTolerance±5%Voltage Rating - AC300VVoltage Rating - DC850VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.197" W (17.50mm x 5.00mm)Height - Seated (Max)0.433" (11.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)Applications-Features-	Package	Radial
Tolerance±5%Voltage Rating - AC300VVoltage Rating - DC850VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.197" W (17.50mm x 5.00mm)Height - Seated (Max)0.433" (11.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)Applications-Features-	Series	MKP385
Voltage Rating - AC300VVoltage Rating - DC850VDielectric MaterialPolyproplene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.197" W (17.50mm x 5.00mm)Height - Seated (Max)0.433" (11.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Capacitance	0.018µF
Voltage Rating - DC850VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.197" W (17.50mm x 5.00mm)Height - Seated (Max)0.433" (11.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Tolerance	$\pm 5\%$
Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.197" W (17.50mm x 5.00mm)Height - Seated (Max)0.433" (11.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Voltage Rating - AC	300V
ESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.197" W (17.50mm x 5.00mm)Height - Seated (Max)0.433" (11.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Voltage Rating - DC	850V
Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.197" W (17.50mm x 5.00mm)Height - Seated (Max)0.433" (11.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Dielectric Material	Polypropylene (PP), Metallized
Nounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.197" W (17.50mm x 5.00mm)Height - Seated (Max)0.433" (11.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	ESR (Equivalent Series Resistance)	-
Package / CaseRadialSize / Dimension0.689" L x 0.197" W (17.50mm x 5.00mm)Height - Seated (Max)0.433" (11.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Operating Temperature	-55°C ~ 110°C
Size / Dimension0.689" L x 0.197" W (17.50mm x 5.00mm)Height - Seated (Max)0.433" (11.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Mounting Type	Through Hole
Height - Seated (Max)0.433" (11.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Package / Case	Radial
TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Size / Dimension	0.689" L x 0.197" W (17.50mm x 5.00mm)
Lead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Height - Seated (Max)	0.433" (11.00mm)
ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Termination	PC Pins
Features -	Lead Spacing	0.591" (15.00mm)
	Applications	DC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DT
Report errors?	Features	-
		Report errors?

MKP385318085JFI2B0 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

MKP385318085JFI2B0 Payment Methods

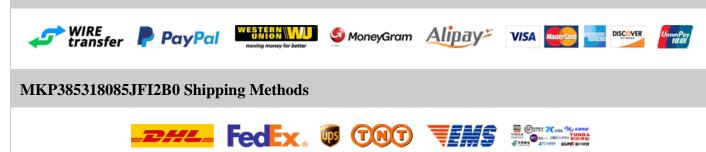

If you have any question about MKP385318085JFI2B0, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com