


MKP385330063JCM2B0

MKP385330063JCM2B0 Information

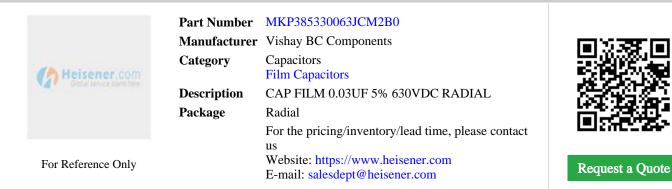

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



MKP385330063JCM2B0 Specifications

ManufacturerVishay BC ComponentsCapacitorsCapacitorsFilm CapacitorsFilm CapacitorsPackageRadialSeriesMKP385Capacitance0.03µFTolerance±5%Voltage Rating - DC630VDielectric MaterialPolypropylene (PP), MetallizedDerating Temperature-Operating Temperature-Size / Dimension0.394" L x 0.236" W (10.00mm x 6.00mm)Bieght - Seated (Max)0.453" (11.50mm)TerminationPC PinsLead Spacing.295" (7.50mm)Applications.295" (7.50mm)Features.Features.		
CategoryCapacitorsPackageRadialPackageRadialSeriesMKP385Capacitors0.03 μFCapacitance0.03 μFTolerance±5%Voltage Rating - AC220 VVoltage Rating - DC630 VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.394" L x 0.236" W (10.00mm x 6.00mm)Height - Seated (Max)0.453" (11.50mm)TerminationPC PinsLead Spacing0.295" (7.50mm)Applications0.295" (7.50mm)Features-	Manufacturer Part Number	MKP385330063JCM2B0
Fin CapacitorsPackageRadialSeriesMKP385Capacitance0.03µFTolerance±5%Voltage Rating - AC220VVoltage Rating - DC630VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.394" L x 0.236" W (10.00mm x 6.00mm)Height - Seated (Max)0.453" (11.50mm)TerminationPC PinsLead Spacing0.295" (7.50mm)ApplicationsDC L Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Manufacturer	Vishay BC Components
PackageRadialSeriesMKP385Capacitance0.03µFTolerance±5%Voltage Rating - AC220VVoltage Rating - DC630VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.453" (11.50mm)Height - Seated (Max)0.453" (150mm)Lead Spacing0.295" (7.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Category	Capacitors
Series MKP385 Capacitance 0.03µF Tolerance ±5% Voltage Rating - AC 220V Voltage Rating - DC 630V Dielectric Material Polypropylene (PP), Metallized ESR (Equivalent Series Resistance) - Operating Temperature -55°C ~ 110°C Mounting Type Through Hole Package / Case Radial Size / Dimension 0.453" (11.50mm) Height - Seated (Max) 0.453" (17.50mm) Lead Spacing 0.295" (7.50mm) Applications C.10°C Filtering; High Frequency, Switching; High Pulse, DV/DT		Film Capacitors
Capacitance0.03µFTolerance±5%Voltage Rating - AC220VVoltage Rating - DC630VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.394" L x 0.236" W (10.00mm x 6.00mm)Height - Seated (Max)0.453" (11.50mm)TerminationPC PinsLead Spacing0.295" (7.50mm)Applicationsa.Features-	Package	Radial
Tolerance±5%Voltage Rating - AC220VVoltage Rating - DC630VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.394" L x 0.236" W (10.00mm x 6.00mm)Height - Seated (Max)0.453" (11.50mm)TerminationPC PinsLead Spacing0.295" (7.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Series	MKP385
Voltage Rating - AC220VVoltage Rating - DC630VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.394" L x 0.236" W (10.00mm x 6.00mm)Height - Seated (Max)0.453" (11.50mm)TerminationPC PinsLead Spacing0.295" (7.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Capacitance	0.03µF
Voltage Rating - DC630VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.394" L x 0.236" W (10.00mm x 6.00mm)Height - Seated (Max)0.453" (11.50mm)TerminationPC PinsLead Spacing0.295" (7.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Tolerance	$\pm 5\%$
Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.394" L x 0.236" W (10.00mm x 6.00mm)Height - Seated (Max)0.453" (11.50mm)TerminationPC PinsLead Spacing0.295" (7.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Voltage Rating - AC	220V
ESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.394" L x 0.236" W (10.00mm x 6.00mm)Height - Seated (Max)0.453" (11.50mm)TerminationPC PinsLead Spacing0.295" (7.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Voltage Rating - DC	630V
Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.394" L x 0.236" W (10.00mm x 6.00mm)Height - Seated (Max)0.453" (11.50mm)TerminationPC PinsLead Spacing0.295" (7.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Dielectric Material	Polypropylene (PP), Metallized
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.394" L x 0.236" W (10.00mm x 6.00mm)Height - Seated (Max)0.453" (11.50mm)TerminationPC PinsLead Spacing0.295" (7.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	ESR (Equivalent Series Resistance)	-
Package / CaseRadialSize / Dimension0.394" L x 0.236" W (10.00mm x 6.00mm)Height - Seated (Max)0.453" (11.50mm)TerminationPC PinsLead Spacing0.295" (7.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Operating Temperature	-55°C ~ 110°C
Size / Dimension0.394" L x 0.236" W (10.00mm x 6.00mm)Height - Seated (Max)0.453" (11.50mm)TerminationPC PinsLead Spacing0.295" (7.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Mounting Type	Through Hole
Height - Seated (Max)0.453" (11.50mm)TerminationPC PinsLead Spacing0.295" (7.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Package / Case	Radial
TerminationPC PinsLead Spacing0.295" (7.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Size / Dimension	0.394" L x 0.236" W (10.00mm x 6.00mm)
Lead Spacing0.295" (7.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Height - Seated (Max)	0.453" (11.50mm)
ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Termination	PC Pins
Features -	Lead Spacing	0.295" (7.50mm)
	Applications	DC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DT
Report errors?	Features	-
		Report errors?

MKP385330063JCM2B0 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

DISCOVER

MKP385330063JCM2B0 Payment Methods



MKP385330063JCM2B0 Shipping Methods



If you have any question about MKP385330063JCM2B0, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com