


MKP385356025JC02G0

MKP385356025JC02G0 Information

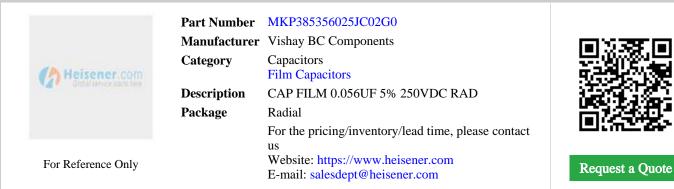

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



MKP385356025JC02G0 Specifications

Manufacturer Vishay BC Components Category Capacitors Film Capacitors Film Capacitors Package Radial Series MKP385 Capacitance 0.056µF Folerance ±5% Voltage Rating - AC 160V Voltage Rating - DC 250V Dielectric Material Polypropylene (PP), Metallized Poprating Temperature - Operating Temperature 55°C ~ 110°C Mounting Type Through Hole Package / Case Radial Size / Dimension 0.394" L x 0.157" W (10.00mm x 4.00mm) Height - Seated (Max) 0.354" (9.00mm) Lead Spacing 0.295" (7.50mm)	_	
CapacitorsPackageRadialPackageRadialSeriesMKP385Capacitance0.056µFTolerance±5%Voltage Rating - AC160VVoltage Rating - DC250VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Type55°C ~ 110°CMounting TypeThrough HoleSize / Dimension0.394" L x 0.157" W (10.00mm x 4.00mm)Height - Seated (Max)0.255" (7.50mm)	Manufacturer Part Number	MKP385356025JC02G0
Film CapacitorsPackageRadialPackageRadialSeriesMKP385Capacitance0.056μFTolerance±5%Voltage Rating - AC160VVoltage Rating - DC250VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.394" L x 0.157" W (10.00mm x 4.00mm)Height - Seated (Max)0.354" (9.00mm)Lead Spacing0.295" (7.50mm)	Manufacturer	Vishay BC Components
PackageRadiaSeriesMKP385Capacitance0.056µFTolerance±5%Voltage Rating - AC160VVoltage Rating - DC250VDielectric MaterialPolypropylene (PP), MetallizedDielectric Material-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.394" L x 0.157" W (10.00mm x 4.00mm)Height - Seated (Max)0.354" (9.00mm)Lead Spacing0.295" (7.50mm)	Category	Capacitors
Series MKP385 Series MKP385 Capacitance 0.056µF Tolerance ±5% Voltage Rating - AC 160V Voltage Rating - DC 250V Dielectric Material Polypropylene (PP), Metallized Dielectric Material - Operating Temperature -55°C ~ 110°C Mounting Type Through Hole Package / Case Radial Size / Dimension 0.354" (9.00mm) x 4.00mm) Height - Seated (Max) 0.354" (9.00mm) Lead Spacing 0.295" (7.50mm)		Film Capacitors
Capacitance0.056µFTolerance±5%Voltage Rating - AC160VVoltage Rating - DC250VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeHolge HolePackage / CaseRadialSize / Dimension0.394" L x 0.157" W (10.00mm x 4.00mm)Height - Seated (Max)0.354" (9.00mm)PerminationPC PinsLead Spacing0.295" (7.50mm)	Package	Radial
Tolerance±5%Voltage Rating - AC160VVoltage Rating - DC250VDielectric MaterialPolypropylene (PP), MetallizedDielectric Material-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.394" L x 0.157" W (10.00mm x 4.00mm)Height - Seated (Max)0.354" (9.00mm)FerminationPC PinsLead Spacing0.295" (7.50mm)	Series	MKP385
Voltage Rating - AC160 VVoltage Rating - DC250 VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.394" L x 0.157" W (10.00mm x 4.00mm)Height - Seated (Max)0.354" (9.00mm)PerminationPC PinsLead Spacing0.295" (7.50mm)	Capacitance	0.056µF
Voltage Rating - DC250VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.394" L x 0.157" W (10.00mm x 4.00mm)Height - Seated (Max)0.354" (9.00mm)TerminationPC PinsLead Spacing0.295" (7.50mm)	Tolerance	$\pm 5\%$
Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.394" L x 0.157" W (10.00mm x 4.00mm)Height - Seated (Max)0.354" (9.00mm)TerminationPC PinsLead Spacing0.295" (7.50mm)	Voltage Rating - AC	160V
ESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.394" L x 0.157" W (10.00mm x 4.00mm)Height - Seated (Max)0.354" (9.00mm)TerminationPC PinsLead Spacing0.295" (7.50mm)	Voltage Rating - DC	250V
Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.394" L x 0.157" W (10.00mm x 4.00mm)Height - Seated (Max)0.354" (9.00mm)TerminationPC PinsLead Spacing0.295" (7.50mm)	Dielectric Material	Polypropylene (PP), Metallized
Nounting TypeThrough HolePackage / CaseRadialSize / Dimension0.394" L x 0.157" W (10.00mm x 4.00mm)Height - Seated (Max)0.354" (9.00mm)TerminationPC PinsLead Spacing0.295" (7.50mm)	ESR (Equivalent Series Resistance)	-
Package / CaseRadialSize / Dimension0.394" L x 0.157" W (10.00mm x 4.00mm)Height - Seated (Max)0.354" (9.00mm)TerminationPC PinsLead Spacing0.295" (7.50mm)	Operating Temperature	-55°C ~ 110°C
Size / Dimension 0.394" L x 0.157" W (10.00mm x 4.00mm) Height - Seated (Max) 0.354" (9.00mm) Termination PC Pins Lead Spacing 0.295" (7.50mm)	Mounting Type	Through Hole
Height - Seated (Max)0.354" (9.00mm)TerminationPC PinsLead Spacing0.295" (7.50mm)	Package / Case	Radial
TerminationPC PinsLead Spacing0.295" (7.50mm)	Size / Dimension	0.394" L x 0.157" W (10.00mm x 4.00mm)
Lead Spacing 0.295" (7.50mm)	Height - Seated (Max)	0.354" (9.00mm)
	Termination	PC Pins
Applications DC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DT	Lead Spacing	0.295" (7.50mm)
	Applications	DC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DT
Features -	Features	-
Report errors?		Report errors?

MKP385356025JC02G0 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

MKP385356025JC02G0 Payment Methods





If you have any question about MKP385356025JC02G0, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com