


MKP385362016JB02W0

MKP385362016JB02W0 Information



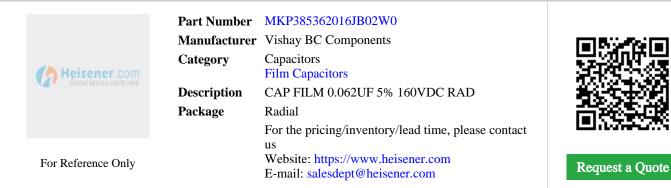

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



MKP385362016JB02W0 Specifications

ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-		
Catage Capacitors Film Capacitors Film Capacitors Package Radial Series MKP385 Capacitance 0.062µF Tolerance ±5% Voltage Rating - AC 110V Voltage Rating - DC 160V Dielectric Material Polyproplene (PP), Metallized Portuge Temperature - Operating Type Through Hole Siz / Dimension 0.283" L x 0.177" W (7.20mm x 4.50mm) Siz / Dimension 0.354" (9.00mm) Height - Seated (Max) 0.917" (5.00mm) Applications DC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DT Features -	Manufacturer Part Number	MKP385362016JB02W0
Fin CapacitorsPackageRadialSeriesMKP385Capacitance0.062µFTolerance±5%Voltage Rating - AC110VVoltage Rating - DC160VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.283° L x 0.177° W (7.20mm x 4.50mm)Height - Seated (Max)0.354" (9.00mm)TerminationPC PinsLead Spacing0.197° (5.00mm)ApplicationsPC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Manufacturer	Vishay BC Components
PackageRadialSeriesMKP385Capacitance0.062µFTolerance±5%Voltage Rating - AC110VVoltage Rating - DC160VDielectric MaterialPolyproplene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.283" L x 0.177" W (7.20mm x 4.50mm)Height - Seated (Max)0.354" (9.00mm)Lead Spacing0.197" (5.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Category	Capacitors
Series MKP385 Capacitance 0.062µF Tolerance ±5% Voltage Rating - AC 110V Voltage Rating - DC 160V Dielectric Material Polypropylene (PP), Metallized Dielectric Material - Operating Temperature -55°C ~ 110°C Mounting Type Through Hole Package / Case Radial Size / Dimension 0.253" L x 0.177" W (7.20mm x 4.50mm) Height - Seated (Max) 0.354" (9.00mm) Lead Spacing 0.197" (5.00mm) Applications DC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DT Features -		Film Capacitors
Capacitance0.062µFTolerance±5%Voltage Rating - AC110VVoltage Rating - DC60VDielectric MaterialPolypropylene (PP), MetallizedDielectric Material-SSR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeRadialPackage / CaseRadialSize / Dimension0.283" L x 0.177" W (7.20mm x 4.50mm)Height - Seated (Max)0.354" (9.00mm)Lead Spacing0.197" (5.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Package	Radial
Tolerance±5%Voltage Rating - AC110VVoltage Rating - DC160VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.283" L x 0.177" W (7.20mm x 4.50mm)Height - Seated (Max)0.354" (9.00mm)TerminationPC PinsLead Spacing0.197" (5.00mm)ApplicationsDC L Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Series	MKP385
Voltage Rating - AC110VVoltage Rating - DC160VDielectric MaterialPolypropylene (PP), MetallizedDielectric Material-SR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.283° L x 0.177° W (7.20mm x 4.50mm)Height - Seated (Max)0.354" (9.00mm)TerminationPC PinsLead Spacing0.197° (5.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Capacitance	0.062µF
Voltage Rating - DC160VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-Mounting TypeSto° ~ 110°CPackage / CaseRadialSize / Dimension0.283" L x 0.177" W (7.20mm x 4.50mm)Height - Seated (Max)0.354" (9.00mm)Termination0.197" (5.00mm)Lead Spacing0.197" (5.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Tolerance	$\pm 5\%$
Dielectric MaterialPolypropylene (PP), MetallizedDielectric Material-ESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.283" L x 0.177" W (7.20mm x 4.50mm)Height - Seated (Max)0.354" (9.00mm)TerminationPC PinsLead Spacing0.197" (5.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Voltage Rating - AC	110V
ESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.283" L x 0.177" W (7.20mm x 4.50mm)Height - Seated (Max)0.354" (9.00mm)TerminationPC PinsLead Spacing0.197" (5.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Voltage Rating - DC	160V
Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.283" L x 0.177" W (7.20mm x 4.50mm)Height - Seated (Max)0.354" (9.00mm)TerminationPC PinsLead Spacing0.197" (5.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Dielectric Material	Polypropylene (PP), Metallized
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.283" L x 0.177" W (7.20mm x 4.50mm)Height - Seated (Max)0.354" (9.00mm)TerminationPC PinsLead Spacing0.197" (5.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	ESR (Equivalent Series Resistance)	-
Package / CaseRadialSize / Dimension0.283" L x 0.177" W (7.20mm x 4.50mm)Height - Seated (Max)0.354" (9.00mm)TerminationPC PinsLead Spacing0.197" (5.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Operating Temperature	-55°C ~ 110°C
Size / Dimension0.283" L x 0.177" W (7.20mm x 4.50mm)Height - Seated (Max)0.354" (9.00mm)TerminationPC PinsLead Spacing0.197" (5.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Mounting Type	Through Hole
Height - Seated (Max)0.354" (9.00mm)TerminationPC PinsLead Spacing0.197" (5.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Package / Case	Radial
TerminationPC PinsLead Spacing0.197" (5.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Size / Dimension	0.283" L x 0.177" W (7.20mm x 4.50mm)
Lead Spacing0.197" (5.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Height - Seated (Max)	0.354" (9.00mm)
Applications DC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DT Features -	Termination	PC Pins
Features -	Lead Spacing	0.197" (5.00mm)
	Applications	DC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DT
Report errors?	Features	-
Report crists:		Report errors?

MKP385362016JB02W0 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

MKP385362016JB02W0 Payment Methods





If you have any question about MKP385362016JB02W0, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com