


MKP385362125JF02W0

MKP385362125JF02W0 Information

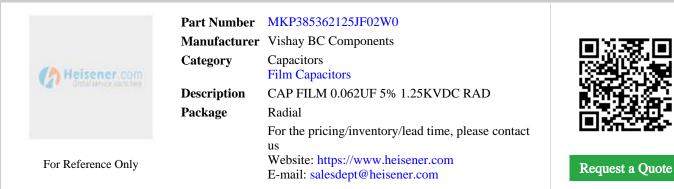

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



MKP385362125JF02W0 Specifications

ManufacturerVishay BC ComponentsCapacitorsFilm CapacitorsPackageRadialSeriesMKP385Capacitance0.062µFTolerance±5%Voltage Rating - AC450VVoltage Rating - DC1250V (1.25kV)Dielectric Material-Operating Temperature-55°C ~ 110°COperating Temperature55°C ~ 110°CPackage / CaseRadialSize / Dimension0.689° L x 0.394° W (17.50mm x 10.00mm)Height - Seated (Max)0.50° (16.50mm)PerminationPC PinsLad Spacing0.591° (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DT		
CategoryCapacitorsPackageRadialPackageMKP385Capacitance0.062µFColarance±5%Voltage Rating - AC450VVoltage Rating - DC1250V (1.25kV)Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CPackage / CaseRadialSize / Dimension0.689" L x 0.394" W (17.50mm x 10.00mm)Height - Seated (Max)0.50" (16.50mm)PerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Manufacturer Part Number	MKP385362125JF02W0
Film CapacitorsPackageRadialSeriesMKP385Capacitance0.062µFTolerance±5%Voltage Rating - AC450VVoltage Rating - DC1250V (1.25kV)Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689° L x 0.394" W (17.50mm x 10.00mm)Height - Seated (Max)0.650" (16.50mm)Per PinsDesting TriperatureLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Manufacturer	Vishay BC Components
PackageRadialSeriesMKP385Capacitance0.062µFTolerance±5%Voltage Rating - AC450VVoltage Rating - DC1250V (1.25kV)Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.394" W (17.50mm x 10.00mm)Height - Seated (Max)0.650" (16.50mm)PerminationDC Irins, OrgApplications0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Category	Capacitors
Series MKP385 Capacitance 0.062µF Tolerance ±5% Voltage Rating - AC 450V Voltage Rating - DC 1250V (1.25kV) Dielectric Material Polypropylene (PP), Metallized ESR (Equivalent Series Resistance) - Operating Temperature -55°C ~ 110°C Mounting Type Through Hole Package / Case Radial Size / Dimension 0.650" (16.50mm) Height - Seated (Max) 0.650" (16.50mm) Por Pins 0.591" (15.00mm) Applications DC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DT Features -		Film Capacitors
Capacitance0.062µFTolerance±5%Voltage Rating - AC450VVoltage Rating - DC1250V (1.25kV)Dielectric MaterialPolyproylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.394" W (17.50mm x 10.00mm)Height - Seated (Max)0.650" (16.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Package	Radial
Tolerance±5%Voltage Rating - AC450VVoltage Rating - DC1250V (1.25kV)Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.394" W (17.50mm x 10.00mm)Height - Seated (Max)0.650" (16.50mm)PerminationPC PinsLead Spacing0.591" (15.00mm)Applications-Features-	Series	MKP385
Voltage Rating - AC450VVoltage Rating - DC1250V (1.25kV)Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.394" W (17.50mm x 10.00mm)Height - Seated (Max)0.650" (16.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Capacitance	0.062µF
Voltage Rating - DC1250V (1.25kV)Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.394" W (17.50mm x 10.00mm)Height - Seated (Max)0.650" (16.50mm)PerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Tolerance	$\pm 5\%$
Dielectric MaterialPolypropylene (PP), MetallizedDielectric Material-ESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.394" W (17.50mm x 10.00mm)Height - Seated (Max)0.650" (16.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Voltage Rating - AC	450V
ESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.394" W (17.50mm x 10.00mm)Height - Seated (Max)0.650" (16.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Voltage Rating - DC	1250V (1.25kV)
Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.394" W (17.50mm x 10.00mm)Height - Seated (Max)0.650" (16.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Dielectric Material	Polypropylene (PP), Metallized
Nounting TypeThrough HoleMounting TypeRadialPackage / CaseRadialSize / Dimension0.689" L x 0.394" W (17.50mm x 10.00mm)Height - Seated (Max)0.650" (16.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	ESR (Equivalent Series Resistance)	-
Package / CaseRadialSize / Dimension0.689" L x 0.394" W (17.50mm x 10.00mm)Height - Seated (Max)0.650" (16.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Operating Temperature	$-55^{\circ}C \sim 110^{\circ}C$
Size / Dimension0.689" L x 0.394" W (17.50mm x 10.00mm)Height - Seated (Max)0.650" (16.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Mounting Type	Through Hole
Height - Seated (Max)0.650" (16.50mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Package / Case	Radial
TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Size / Dimension	0.689" L x 0.394" W (17.50mm x 10.00mm)
Lead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Height - Seated (Max)	0.650" (16.50mm)
Applications DC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DT Features -	Termination	PC Pins
Features -	Lead Spacing	0.591" (15.00mm)
	Applications	DC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DT
Report errors?	Features	-
		Report errors?

MKP385362125JF02W0 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

DISCOVER

MKP385362125JF02W0 Payment Methods



MKP385362125JF02W0 Shipping Methods



If you have any question about MKP385362125JF02W0, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com