


MKP385375040JCA2B0

MKP385375040JCA2B0 Information

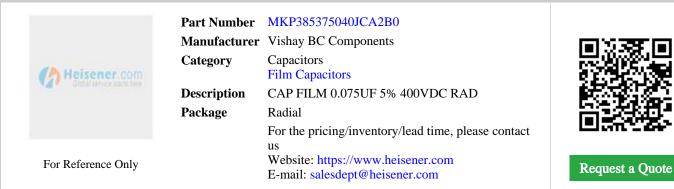

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



MKP385375040JCA2B0 Specifications

Manufacturer Vishay BC Components Category Capacitors Film Capacitors Film Capacitors Package Radial Series MKP385 Capacitance 0.075µF Tolerance ±5% Voltage Rating - AC 200V Voltage Rating - DC 400V Dielectric Material Polypropylene (PP), Metallized ESR (Equivalent Series Resistance) - Operating Temperature -55°C ~ 110°C Mounting Type Through Hole Package / Case Radial Size / Dimension 0.394" L x 0.236" W (10.00mm x 6.00mm) Height - Seated (Max) 0.453" (11.50mm) Lead Spacing 0.295" (7.50mm)		
CapacitorsPackageRadialSeriesMKP385Capacitance0.075µFTolerance±5%Voltage Rating - AC200VVoltage Rating - DC400VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Type55°C ~ 110°CMounting TypeThrough HoleSize / Dimension0.394" L x 0.236" W (10.00mm x 6.00mm)Height - Seated (Max)0.453" (11.50mm)Lead Spacing0.295" (7.50mm)	Manufacturer Part Number	MKP385375040JCA2B0
Film CapacitorsPackageRadialPackageMKP385Capacitance0.075µFTolerance±5%Voltage Rating - AC200VVoltage Rating - DC400VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.394" L x 0.236" W (10.00mm x 6.00mm)Height - Seated (Max)0.453" (11.50mm)Lead Spacing0.295" (7.50mm)	Manufacturer	Vishay BC Components
PackageRadiaSeriesMKP385Capacitance0.075µFTolerance±5%Voltage Rating - AC200VVoltage Rating - DC400VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.394" L x 0.236" W (10.00mm x 6.00mm)Height - Seated (Max)0.453" (11.50mm)Lead Spacing0.295" (7.50mm)	Category	Capacitors
Series MKP385 Series MKP385 Capacitance 0.075µF Tolerance ±5% Voltage Rating - AC 200V Voltage Rating - DC 400V Dielectric Material Polypropylene (PP), Metallized Dielectric Material - Operating Temperature -55°C ~ 110°C Mounting Type Through Hole Package / Case Radial Size / Dimension 0.453" (11.50mm) Height - Seated (Max) 0.455" (7.50mm)		Film Capacitors
Capacitance0.075µFTolerance±5%Voltage Rating - AC200VVoltage Rating - DC400VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.394" L x 0.236" W (10.00mm x 6.00mm)Height - Seated (Max)0.453" (11.50mm)TerminationPC PinsLead Spacing0.295" (7.50mm)	Package	Radial
Tolerance±5%Voltage Rating - AC200VVoltage Rating - DC400VDielectric MaterialPolypropylene (PP), MetallizedDielectric Material-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.394" L x 0.236" W (10.00mm x 6.00mm)Height - Seated (Max)0.453" (11.50mm)PerminationPC PinsLead Spacing0.295" (7.50mm)	Series	MKP385
Voltage Rating - AC200VVoltage Rating - DC400VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.394" L x 0.236" W (10.00mm x 6.00mm)Height - Seated (Max)0.453" (11.50mm)TerminationPC PinsLead Spacing0.295" (7.50mm)	Capacitance	0.075µF
Voltage Rating - DC400VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.394" L x 0.236" W (10.00mm x 6.00mm)Height - Seated (Max)0.453" (11.50mm)TerminationPC PinsLead Spacing0.295" (7.50mm)	Tolerance	$\pm 5\%$
Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.394" L x 0.236" W (10.00mm x 6.00mm)Height - Seated (Max)0.453" (11.50mm)TerminationPC PinsLead Spacing0.295" (7.50mm)	Voltage Rating - AC	200V
ESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.394" L x 0.236" W (10.00mm x 6.00mm)Height - Seated (Max)0.453" (11.50mm)TerminationPC PinsLead Spacing0.295" (7.50mm)	Voltage Rating - DC	400V
Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.394" L x 0.236" W (10.00mm x 6.00mm)Height - Seated (Max)0.453" (11.50mm)TerminationPC PinsLead Spacing0.295" (7.50mm)	Dielectric Material	Polypropylene (PP), Metallized
Notified TypeThrough HoleMounting TypeRadialPackage / CaseRadialSize / Dimension0.394" L x 0.236" W (10.00mm x 6.00mm)Height - Seated (Max)0.453" (11.50mm)TerminationPC PinsLead Spacing0.295" (7.50mm)	ESR (Equivalent Series Resistance)	-
Package / CaseRadialSize / Dimension0.394" L x 0.236" W (10.00mm x 6.00mm)Height - Seated (Max)0.453" (11.50mm)TerminationPC PinsLead Spacing0.295" (7.50mm)	Operating Temperature	-55°C ~ 110°C
Size / Dimension 0.394" L x 0.236" W (10.00mm x 6.00mm) Height - Seated (Max) 0.453" (11.50mm) Termination PC Pins Lead Spacing 0.295" (7.50mm)	Mounting Type	Through Hole
Height - Seated (Max)0.453" (11.50mm)TerminationPC PinsLead Spacing0.295" (7.50mm)	Package / Case	Radial
TerminationPC PinsLead Spacing0.295" (7.50mm)	Size / Dimension	0.394" L x 0.236" W (10.00mm x 6.00mm)
Lead Spacing 0.295" (7.50mm)	Height - Seated (Max)	0.453" (11.50mm)
	Termination	PC Pins
Applications DC Link DC Eiltoring: High Ergevengy, Switching: High Pulse, DV/DT	Lead Spacing	0.295" (7.50mm)
Applications DC Link, DC Filtering; Figh Frequency, Switching; High Pulse, DV/D1	Applications	DC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DT
Features -	Features	-
Report errors?		Report errors?

MKP385375040JCA2B0 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE BUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

MKP385375040JCA2B0 Payment Methods



MKP385375040JCA2B0 Shipping Methods



If you have any question about MKP385375040JCA2B0, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com