


MKP385415040JFM2B0

MKP385415040JFM2B0 Information

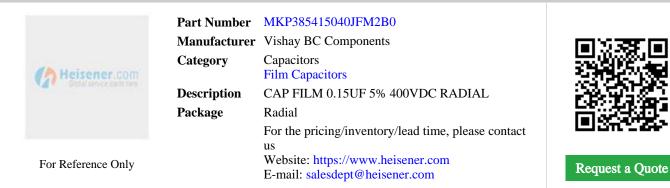

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



MKP385415040JFM2B0 Specifications

ManufacturerVishay BC ComponentsCategoryCapacitorsFilm CapacitorsFilm CapacitorsPackageRadialSeriesMKP385Capacitance0.15µFTolerance±5%Voltage Rating - DC200VVoltage Rating - DC400VDielectric MaterialPolyropylene (PP), MetallizedDoprating Temperature-Operating Temperature-55°C ~ 110°CVoltage / CaseRadialSize / Dimension0.689° L x 0.236° W (17.50mm x 6.00mm)Height - Seated (Max)0.51°I (15.00mm)Applications0.591°I (15.00mm)ApplicationsD.51°I (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DT		
Category Capacitors Film Capacitors Film Capacitors Package Radial Series MKP385 Capacitance 0.15µF Tolerance ±5% Voltage Rating - AC 200V Voltage Rating - DC 400V Dielectric Material Polypropylene (PP), Metallized Series Resistance) - Operating Temperature -55°C ~ 110°C Mounting Type Through Hole Size / Dimension 0.689° L x 0.236° W (17.50mm x 6.00mm) Height - Seated (Max) 0.472° (12.00mm) PC Fins 5.5°1 (15.00mm) Lead Spacing 0.591° (15.00mm) Applications DC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DT Features -	Manufacturer Part Number	MKP385415040JFM2B0
Film CapacitorsPackageRadialSeriesMKP385Capacitance0.15µFTolerance±5%Voltage Rating - AC200VVoltage Rating - DC400VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689° L x 0.236° W (17.50mm x 6.00mm)Height - Seated (Max)0.472° (12.00mm)PerinsD51° (15.00mm)Lead Spacing0.591° (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Manufacturer	Vishay BC Components
PackageRadialSeriesMKP385Capacitance0.15µFTolerance±5%Voltage Rating - AC200VVoltage Rating - DC400VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.236" W (17.50mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)Per Imation0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Category	Capacitors
Series MKP385 Capacitance 0.15µF Tolerance ±5% Voltage Rating - AC 200V Voltage Rating - DC 400V Dielectric Material Polypropylene (PP), Metallized DSR (Equivalent Series Resistance) - Operating Temperature -55°C ~ 110°C Mounting Type Through Hole Package / Case Radial Size / Dinension 0.452° W (17.50mm x 6.00mm) Height - Seated (Max) 0.472" (12.00mm) Package Jacing 0.591" (15.00mm) Applications DC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DT Features -		Film Capacitors
Capacitance0.15µFTolerance±5%Voltage Rating - AC200VVoltage Rating - DC400VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.472" (12.00mm) K 0.00mm)Height - Seated (Max)0.472" (12.00mm)Lead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Package	Radial
Tolerance±5%Voltage Rating - AC200VVoltage Rating - DC400VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.236" W (17.50mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)PerminationPC PinsLead Spacing0.591" (15.00mm)Applications-Features-	Series	MKP385
Voltage Rating - AC200VVoltage Rating - DC400VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.236" W (17.50mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Capacitance	0.15µF
Voltage Rating - DC400VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.236" W (17.50mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Tolerance	$\pm 5\%$
Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.236" W (17.50mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Voltage Rating - AC	200V
ESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.236" W (17.50mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Voltage Rating - DC	400V
Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.236" W (17.50mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Dielectric Material	Polypropylene (PP), Metallized
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.689" L x 0.236" W (17.50mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	ESR (Equivalent Series Resistance)	-
Package / CaseRadialSize / Dimension0.689" L x 0.236" W (17.50mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Operating Temperature	-55°C ~ 110°C
Size / Dimension0.689" L x 0.236" W (17.50mm x 6.00mm)Height - Seated (Max)0.472" (12.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Mounting Type	Through Hole
Height - Seated (Max)0.472" (12.00mm)TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Package / Case	Radial
TerminationPC PinsLead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Size / Dimension	0.689" L x 0.236" W (17.50mm x 6.00mm)
Lead Spacing0.591" (15.00mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Height - Seated (Max)	0.472" (12.00mm)
Applications DC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DT Features -	Termination	PC Pins
Features -	Lead Spacing	0.591" (15.00mm)
	Applications	DC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DT
Report errors?	Features	-
		Report errors?

MKP385415040JFM2B0 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

DISCOVER

MKP385415040JFM2B0 Payment Methods



MKP385415040JFM2B0 Shipping Methods



If you have any question about MKP385415040JFM2B0, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com