


MKP385627040JYM5T0

MKP385627040JYM5T0 Information

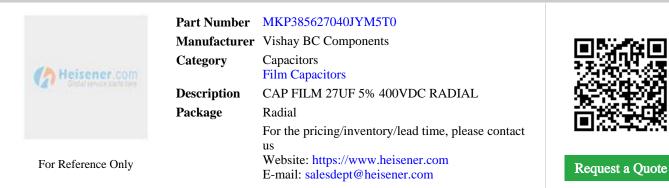

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



MKP385627040JYM5T0 Specifications

ManufacturerVishay BC ComponentsCapacitorsCapacitorsFilm CapacitorsFilm CapacitorsPackageRadialSeriesMKP385Capacitance27µFTolerance±5%Voltage Rating - DC200VVoltage Rating - DC400VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-5°C ~ 110°CPackage / CaseRadialSize / Dimension2.264" L x 1.378" W (57.50mm x 35.00mm)Height - Seated (Max)1.969" (50.00mm)TerminationPC PinsLad Spacing2.067" (52.50mm)ApplicationsJ.067" (52.50mm)Features-Features-Color Series Residence)-Stree Series Residence)-Size A Dimension2.067" (52.50mm)Size A DimensionDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-		
CategoryCapacitorsCapacitorsFilm CapacitorsPackageRadialSeriesMKP385Capacitance27μFTolerance±5%Voltage Rating - AC200VVoltage Rating - DC400VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension2.264" L x 1.378" W (57.50mm x 35.00mm)Height - Seated (Max)1.969" (50.00mm)TerminationPC PinsLead Spacing2.067" (52.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Manufacturer Part Number	MKP385627040JYM5T0
Film CapacitorsPackageRadialSeriesMKP385Capacitance27µFTolerance±5%Voltage Rating - AC200VVoltage Rating - DC400VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension2.264" L x 1.378" W (57.50mm x 35.00mm)Height - Seated (Max)1.969" (50.00mm)TerminationPC PinsLead Spacing2.067" (52.50mm)ApplicationsDC L Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Manufacturer	Vishay BC Components
PackageRadialSeriesMKP385Capacitance27µFTolerance±5%Voltage Rating - AC200VVoltage Rating - DC400VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension.264" L x 1.378" W (57.50mm x 35.00mm)Height - Seated (Max).969" (50.00mm)TerminationPC PinsLead Spacing.067" (52.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Category	Capacitors
Series MKP385 Capacitance 27µF Tolerance ±5% Voltage Rating - AC 200V Voltage Rating - DC 400V Dielectric Material Polypropylene (PP), Metallized ESR (Equivalent Series Resistance) - Operating Temperature -55°C ~ 110°C Mounting Type Through Hole Package / Case Radial Size / Dimension 1.969" (50.00mm) Height - Seated (Max) 1.969" (50.00mm) Termination PC Pins Lead Spacing 2.067" (52.50mm) Applications DC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DT Features -		Film Capacitors
Capacitance27μFTolerance±5%Voltage Rating - AC200VVoltage Rating - DC400VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.969" (50.00mm) x 35.00mm)Height - Seated (Max)1.969" (50.00mm)TerminationPC PinsLead Spacing2.067" (52.50mm)Applicationsn.Features-	Package	Radial
Tolerance±5%Voltage Rating - AC200VVoltage Rating - DC400VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension2.264" L x 1.378" W (57.50mm x 35.00mm)Height - Seated (Max)1.969" (50.00mm)TerminationPC PinsLead Spacing2.067" (52.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Series	MKP385
Voltage Rating - AC200VVoltage Rating - DC400VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension2.264" L x 1.378" W (57.50mm x 35.00mm)Height - Seated (Max)1.969" (50.00mm)TerminationPC PinsLead Spacing2.067" (52.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Capacitance	27µF
Voltage Rating - DC400VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension2.264" L x 1.378" W (57.50mm x 35.00mm)Height - Seated (Max)1.969" (50.00mm)TerminationPC PinsLead Spacing2.067" (52.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Tolerance	$\pm 5\%$
Dielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension2.264" L x 1.378" W (57.50mm x 35.00mm)Height - Seated (Max)1.969" (50.00mm)TerminationPC PinsLead Spacing2.067" (52.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Voltage Rating - AC	200V
ESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension2.264" L x 1.378" W (57.50mm x 35.00mm)Height - Seated (Max)1.969" (50.00mm)TerminationPC PinsLead Spacing2.067" (52.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Voltage Rating - DC	400V
Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension2.264" L x 1.378" W (57.50mm x 35.00mm)Height - Seated (Max)1.969" (50.00mm)TerminationPC PinsLead Spacing2.067" (52.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Dielectric Material	Polypropylene (PP), Metallized
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension2.264" L x 1.378" W (57.50mm x 35.00mm)Height - Seated (Max)1.969" (50.00mm)TerminationPC PinsLead Spacing2.067" (52.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	ESR (Equivalent Series Resistance)	-
Package / CaseRadialSize / Dimension2.264" L x 1.378" W (57.50mm x 35.00mm)Height - Seated (Max)1.969" (50.00mm)TerminationPC PinsLead Spacing2.067" (52.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Operating Temperature	-55°C ~ 110°C
Size / Dimension2.264" L x 1.378" W (57.50mm x 35.00mm)Height - Seated (Max)1.969" (50.00mm)TerminationPC PinsLead Spacing2.067" (52.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Mounting Type	Through Hole
Height - Seated (Max)1.969" (50.00mm)TerminationPC PinsLead Spacing2.067" (52.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Package / Case	Radial
TerminationPC PinsLead Spacing2.067" (52.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Size / Dimension	2.264" L x 1.378" W (57.50mm x 35.00mm)
Lead Spacing2.067" (52.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Height - Seated (Max)	1.969" (50.00mm)
ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Termination	PC Pins
Features -	Lead Spacing	2.067" (52.50mm)
	Applications	DC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DT
Report errors?	Features	-
		Report errors?

MKP385627040JYM5T0 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

MKP385627040JYM5T0 Payment Methods





If you have any question about MKP385627040JYM5T0, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com