

MLE-151-01-G-DV

MLE-151-01-G-DV Information

	Part Number Manufacturer	MLE-151-01-G-DV Samtec Inc.	
Containance contains	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	CONN RECEPT 102POS 1MM DUAL SMD	333640
	Package	-	
For Reference Only		For the pricing/inventory/lead time, please contact	
		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



MLE-151-01-G-DV Specifications

Manufacturer Part Number MLE-151-01-G-DV Manufacturer Samtec Inc. Category Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets Rectangular Connectors - Headers, Receptacles, Female Sockets Package - Series MLE Connector Type Receptacle Contact Type Female Socket Style Board to Board Number of Positions 102 Number of Positions Loaded All Pitch - Mating 0.039" (1.00mm) Number of Rows 2 Row Spacing - Mating 0.039" (1.00mm) Mounting Type Surface Mount Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesMLEConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions102Number of Positions Loaded1.030" (1.00mm)Number of Rows2Row Spacing - Mating0.039" (1.00mm)Mounting TypeSolderFerninationSolderFerninationSolderFostening TypeSolder	Manufacturer Part Number	MLE-151-01-G-DV
Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesMLEConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions102Number of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.039" (1.00mm)Mounting TypeSulface MountFerminationSolderFastening TypePush-Pull	Manufacturer	Samtec Inc.
Package.SeriesMLEConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions102Number of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - MatingSolder (1.00mm)Mounting TypeSolderFerminationSolderPosh-PullSolder	Category	Connectors, Interconnects
SeriesMLESeriesMLEConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions102Number of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.039" (1.00mm)Mounting TypeSurface MountFerminationSolderFastening TypePush-Pull		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions102Number of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.039" (1.00mm)Mounting TypeSurface MountFastening TypePush-Pull	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions102Number of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.039" (1.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-Pull	Series	MLE
StyleBoard to BoardStyleBoard to BoardNumber of Positions102Number of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.039" (1.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-Pull	Connector Type	Receptacle
Number of Positions102Number of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.039" (1.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-Pull	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.039" (1.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-Pull	Style	Board to Board
Pitch - Mating0.039" (1.00mm)Number of Rows2Row Spacing - Mating0.039" (1.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-Pull	Number of Positions	102
Number of Rows2Row Spacing - Mating0.039" (1.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-Pull	Number of Positions Loaded	All
Row Spacing - Mating0.039" (1.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-Pull	Pitch - Mating	0.039" (1.00mm)
Mounting TypeSurface MountTerminationSolderFastening TypePush-Pull	Number of Rows	2
TerminationSolderFastening TypePush-Pull	Row Spacing - Mating	0.039" (1.00mm)
Fastening Type Push-Pull	Mounting Type	Surface Mount
	Termination	Solder
Contact Finish - Mating Gold	Fastening Type	Push-Pull
•	Contact Finish - Mating	Gold
Contact Finish Thickness - Mating 10µin (0.25µm)	Contact Finish Thickness - Mating	10μin (0.25μm)
Insulation Color Black	Insulation Color	Black
Insulation Height 0.130" (3.30mm)	Insulation Height	0.130" (3.30mm)
Contact Length - Post -	Contact Length - Post	-
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating -	Material Flammability Rating	-

Contact Finish - Post	-		
Mated Stacking Heights	-		
Ingress Protection	-		
Features	-		
			Report errors?

MLE-151-01-G-DV Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

MLE-151-01-G-DV Payment Methods

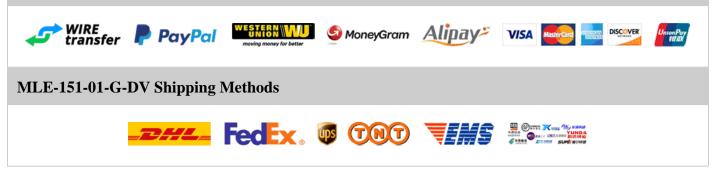

If you have any question about MLE-151-01-G-DV, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com