

MMS-132-02-L-DV

MMS-132-02-L-DV Information



Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



MMS-132-02-L-DV Specifications

Manufacturer Part NumberMMS-132-02-L-DVManufacturerSamtec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesMMSConnector TypeReceptacleContact TypeReceptacleSortact TypeBoard or CableNumber of Positions LoadedAllNumber of Rows2Row Spacing - Mating0.079" (2.00mm)Number of RowsSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish - MatingI.01/1" (4.50mm)Insulation ColorBlackInsulation Field1.01/1" (4.50mm)Contact Length - Post-Insulation Field1.01/1" (4.50mm)Contact Length - Post-Insulation Field-Insulation Field1.01/1" (4.50mm)Contact Length - Post-Insulation Field-Insulation Field-Ins		
Category Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets Package - Series MMS Connector Type Receptacle Connector Type Receptacle Connector Type Receptacle Connector Type Board to Board or Cable Number of Positions 64 Number of Positions Loaded All Number of Rows 2 Row Spacing - Mating 0.079" (2.00mm) Mounting Type Surface Mount Yurdee Mathing 0.079" (2.00mm) Yundee Type Surface Mount Termination Solder Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Contact Finish Thickness - Mating Ipuin (0.25µm) Insulation Height 0.177" (4.50mm) Contact Length - Post -	Manufacturer Part Number	MMS-132-02-L-DV
Actangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesMMSConnector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions64Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountYenniationSolderFerninationGoldFortar Finish - MatingGoldContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation CloorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-	Manufacturer	Samtec Inc.
Package-SeriesMMSConnector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions64Number of Positions LoadedAllPitch - Mating0.079° (2.00mn)Number of Rows2Row Spacing - MatingSolderMounting TypeSolderFerminationSolderFortar InformationGoldContact Finish - MatingGoldContact Finish - MatingIpin (0.25µm)Insulation ColorBackInsulation Height0.177" (4.50mn)Contact Length - Post-	Category	Connectors, Interconnects
SeriesMMSConnector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions64Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountFastening TypeSurface MountContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.17" (4.50mm)Contact Length - Post-		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions64Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountFastening TypeSurface MountContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Field0.177" (4.50mm)Contact Length - Post-	Package	-
Contact TypeFemale SocketStyleBoard to Board or CableNumber of Positions64Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.17" (4.50mm)Contact Length - Post.	Series	MMS
StyleBoard to Board or CableNumber of Positions64Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-	Connector Type	Receptacle
Yumber of Positions 64 Number of Positions Loaded All Pitch - Mating 0.079" (2.00mm) Number of Rows 2 Row Spacing - Mating 0.079" (2.00mm) Mounting Type 0.079" (2.00mm) Formination Surface Mount Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Insulation Color Black Insulation Height 0.177" (4.50mm)	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-	Style	Board to Board or Cable
Pitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSurface MountFastening TypeSolderFontact Finish - MatingPush-PullContact Finish - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-	Number of Positions	64
Number of Rows2Number of Rows0.079" (2.00mm)Row Spacing - MatingSurface MountMounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-	Number of Positions Loaded	All
Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-	Pitch - Mating	0.079" (2.00mm)
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-	Row Spacing - Mating	0.079" (2.00mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-	Mounting Type	Surface Mount
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-	Termination	Solder
Contact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.177" (4.50mm)Contact Length - Post-	Contact Finish - Mating	Gold
Insulation Height0.177" (4.50mm)Contact Length - Post-	Contact Finish Thickness - Mating	10µin (0.25µm)
Contact Length - Post -	Insulation Color	Black
-	Insulation Height	0.177" (4.50mm)
	Contact Length - Post	-
Operating Temperature -55°C ~ 125°C	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating -	Material Flammability Rating	-

Contact Finish - Post	Tin		
Mated Stacking Heights	-		
Ingress Protection	-		
Features	-		
		Report errors	2

MMS-132-02-L-DV Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

MMS-132-02-L-DV Payment Methods

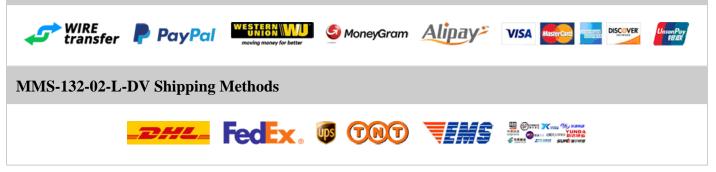

If you have any question about MMS-132-02-L-DV, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com