


# **MR041E103ZAA**

### MR041E103ZAA Information

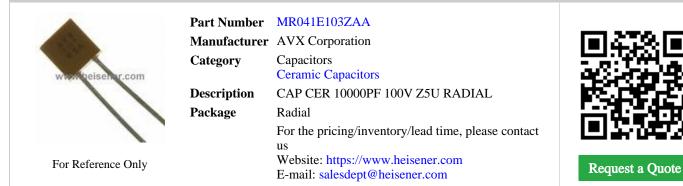

## **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## MR041E103ZAA Specifications

ManufacturerAVX CorporationCapacitorsCaramic CapacitorsPackageRadialSeriesCeralam? MRCapacitance10000pFTolerance-20%, +80%Voltage - Rated100VTomperature Coefficient25UOperating Temperature10°C ~ 85°CRatings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeInorg HolePackage / CaseRadialSiz / Dimension0.10° (L x 0.090° W (4.83mm x 2.28mm)Height - Seated (Max).Tickness (Max)0.200° (5.08mm)Lead Spacing0.10° (2.54mm)	-	
CategoryCapacitorsPackageRadialPackageCeralam? MRCapacitance10000pFColerance-20%, +80%Voltage - Rated100VTomerature CoefficientZ5UOperating Temperature10°C ~ 85°CFeatures-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.10° L x 0.090° W (4.83mm x 2.28mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100° L 2.54mm)Lead StyleStraight	Manufacturer Part Number	MR041E103ZAA
Caranic CapacitorsPackageRadialSeriesCeralam? MRCapacitance10000pFTolerance-20%, +80%Voltage - Rated100VTemperature CoefficientZ5UOperating Temperature10°C ~ 85°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HoleSiz / Dimension0.190° L x 0.090° W (4.83mm x 2.28mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing1.010° (2.54mm)Lead StyleStraight	Manufacturer	AVX Corporation
PackageRadialSeriesCeralam? MRCapacitance10000pFTolerance-20%, +80%Voltage - Rated100VTomperature CoefficientZ5UOperating Temperature10°C ~ 85°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeMoloy M (4.83mm x 2.28mm)Size / Dimension0.100" (5.08mm)Height - Seated (Max)-Lead Spacing0.100" (2.54mm)Katage StyleStraight	Category	Capacitors
Series   Ceralam? MR     Capacitance   10000pF     Tolerance   -20%, +80%     Voltage - Rated   100V     Tomperature Coefficient   25U     Operating Temperature   10°C ~ 85°C     Features   -     Ratings   -     Applications   General Purpose     Mounting Type   Mounting Type     Package / Case   Ratial     Size / Dimension   0.100° L x 0.090° W (4.83mm x 2.28mm)     Height - Seated (Max)   -     Thickness (Max)   -     Lead Spacing   0.100° (2.54mm)     Lead Style   Straight		Ceramic Capacitors
Capacitance10000pFTolerance-20%, +80%Voltage - Rated100VTemperature CoefficientZ5UOperating Temperature-0°C ~ 85°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeHolePackage / CaseRadialSize / Dimension0.100" (S.08mm) x 2.28mm)Height - Seated (Max)-Thickness (Max)0.100" (S.08mm)Lead SpacingStraightKate StyleStraight	Package	Radial
Tolerance-20%, +80%Voltage - Rated100VTemperature Coefficient25UOperating Temperature10°C ~ 85°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeMailPackage / CaseRadialSize / Dimension0.100° L x 0.090° W (4.83mm x 2.28mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100° (2.54mm)Lead StyleStaight	Series	Ceralam? MR
Voltage - RatedIOVTemperature CoefficientZ5UOperating Temperature10°C ~ 85°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.100" L x 0.090" W (4.83mm x 2.28mm)Height - Seated (Max)-Intickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Capacitance	10000pF
Temperature Coefficient   Z5U     Operating Temperature   10°C ~ 85°C     Features   -     Ratings   -     Applications   General Purpose     Failure Rate   -     Mounting Type   Through Hole     Package / Case   Radial     Size / Dimension   0.190" L x 0.090" W (4.83mm x 2.28mm)     Height - Seated (Max)   -     Thickness (Max)   -     Lead Spacing   0.100" (2.54mm)     Lead Style   Straight	Tolerance	-20%, +80%
Operating Temperature10°C ~ 85°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.190" L x 0.090" W (4.83mm x 2.28mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Voltage - Rated	100V
Features-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.190" L x 0.090" W (4.83mm x 2.28mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Temperature Coefficient	Z5U
Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.190" L x 0.090" W (4.83mm x 2.28mm)Height - Seated (Max)0.200" (5.08mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Operating Temperature	10°C ~ 85°C
ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.190" L x 0.090" W (4.83mm x 2.28mm)Height - Seated (Max)0.200" (5.08mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Features	-
Failure Rate-Failure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.190" L x 0.090" W (4.83mm x 2.28mm)Height - Seated (Max)0.200" (5.08mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Ratings	-
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.190" L x 0.090" W (4.83mm x 2.28mm)Height - Seated (Max)0.200" (5.08mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Applications	General Purpose
Package / CaseRadialSize / Dimension0.190" L x 0.090" W (4.83mm x 2.28mm)Height - Seated (Max)0.200" (5.08mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Failure Rate	-
Size / Dimension 0.190" L x 0.090" W (4.83mm x 2.28mm)   Height - Seated (Max) 0.200" (5.08mm)   Thickness (Max) -   Lead Spacing 0.100" (2.54mm)   Lead Style Straight	Mounting Type	Through Hole
Height - Seated (Max)0.200" (5.08mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Package / Case	Radial
Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Size / Dimension	0.190" L x 0.090" W (4.83mm x 2.28mm)
Lead Spacing0.100" (2.54mm)Lead StyleStraight	Height - Seated (Max)	0.200" (5.08mm)
Lead Style Straight	Thickness (Max)	-
	Lead Spacing	0.100" (2.54mm)
Report errors?	Lead Style	Straight
		Report errors?

#### MR041E103ZAA Guarantees



Quality Guarantees

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

#### MR041E103ZAA Payment Methods



### MR041E103ZAA Shipping Methods



If you have any question about MR041E103ZAA, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com