


MR045A150JAA

MR045A150JAA Information



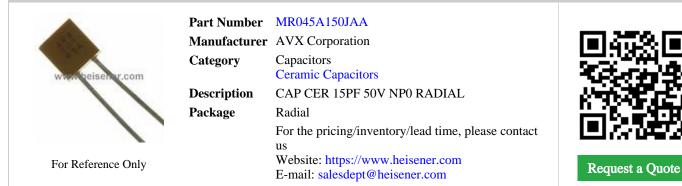

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



MR045A150JAA Specifications

Manufacturer Part Number MR045A150JAA Manufacturer AVX Corporation Category Capacitors Ceramic Capacitors Ceramic Capacitors Package Radial Series Ceramic MR Capacitance 15pF Tolerance ±5% Voltage - Rated 00G, NP0 Operating Temperature 05°C ~ 125°C Pactures - Applications General Purpose Applications General Purpose Faiture Rate - Mounting Type Through Hole Size / Dimension 0.100° (5.08mm) Faitures (Max) 0.200° (5.08mm) Thickness (Max) - Lead Spacing 0.100° (2.54mm)	-	
CategoryCapacitorsPackageRadialPackageRadialSeriesCeralam?MRCapacitance15pFTolerance±5%Voltage - Rated50VTomperature CoefficientCOG,NP0Operating Temperature-55°C ~ 125°CFatures-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / Case.190° L x 0.090" W (4.83mm x 2.28mm)Height - Seated (Max).200° (5.08mm)Thickness (Max).100" (2.54mm)Lead SpacingMainghileLead StyleStraight	Manufacturer Part Number	MR045A150JAA
Ceranic CapacitorsPackageRadialSeriesCeralam? MRCapacitance15pFTolerance±5%Voltage - RatedS0VTemperature CoefficientCOG, NP0Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HoleSize / Dimension0.100" L x 0.090" W (4.83mm x 2.28mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Manufacturer	AVX Corporation
PackageRadialSeriesCeralam? MRCapacitance15pFTolerance±5%Voltage Rated50VTemperature CoefficientC0G, NP0Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeMinogi HoleSize / Dimension.100° L x 0.090° W (4.83mm x 2.28mm)Fickness (Max)-Height - Seated (Max).100° (5.08mm)Lead Spacing.100° (2.54mm)Lead StyleStraight	Category	Capacitors
SeriesCeralam? MRCapacitance15pFTolerance±5%Voltage Rated50VTemperature CoefficientC0G, NP0Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Nourting TypeThrough HoleSize / Dimension0.100° L x 0.090° W (4.83mm x 2.28mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100° (2.54mm)Lead StyleStraight		Ceramic Capacitors
Capacitance15pFTolerance±5%Voltage - Rated50VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HoleSize / Dimension0.190° L x 0.090° W (4.83mm x 2.28mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100° (2.54mm)Lead StyleStraight	Package	Radial
Tolerance±%Voltage - Rated50VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.100" L x 0.090" W (4.83mm x 2.28mm)Height - Seated (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Series	Ceralam? MR
Voltage - Rated50VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFaiture Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.100° T x 0.090° W (4.83mm x 2.28mm)Height - Seated (Max)-Thickness (Max)0.100° (5.08mm)Lead Spacing0.100° (2.54mm)Lead StyleStraight	Capacitance	15pF
Temperature CoefficientC0G, NP0Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.190° L x 0.090° W (4.83mm x 2.28mm)Height - Seated (Max)-Thickness (Max)0.200° (5.08mm)Lead Spacing0.100° (2.54mm)Lead StyleStraight	Tolerance	±5%
Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.190" L x 0.090" W (4.83mm x 2.28mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Voltage - Rated	50V
Features-Features-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.190" L x 0.090" W (4.83mm x 2.28mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Temperature Coefficient	C0G, NP0
Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.190" L x 0.090" W (4.83mm x 2.28mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Operating Temperature	-55°C ~ 125°C
ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.190" L x 0.090" W (4.83mm x 2.28mm)Height - Seated (Max)0.200" (5.08mm)Thickness (Max)0.100" (2.54mm)Lead Spacing0.100" (2.54mm)Kata StraightStraight	Features	-
Failure Rate-Founting TypeThrough HolePackage / CaseRadialSize / Dimension0.190" L x 0.090" W (4.83mm x 2.28mm)Height - Seated (Max)0.200" (5.08mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Ratings	-
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.190" L x 0.090" W (4.83mm x 2.28mm)Height - Seated (Max)0.200" (5.08mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Applications	General Purpose
Package / CaseRadialSize / Dimension0.190" L x 0.090" W (4.83mm x 2.28mm)Height - Seated (Max)0.200" (5.08mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Failure Rate	-
Size / Dimension 0.190" L x 0.090" W (4.83mm x 2.28mm) Height - Seated (Max) 0.200" (5.08mm) Thickness (Max) - Lead Spacing 0.100" (2.54mm) Lead Style Straight	Mounting Type	Through Hole
Height - Seated (Max)0.200" (5.08mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Package / Case	Radial
Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Size / Dimension	0.190" L x 0.090" W (4.83mm x 2.28mm)
Lead Spacing0.100" (2.54mm)Lead StyleStraight	Height - Seated (Max)	0.200" (5.08mm)
Lead Style Straight	Thickness (Max)	-
	Lead Spacing	0.100" (2.54mm)
Report errors?	Lead Style	Straight
		Report errors?

MR045A150JAA Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE EUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

MR045A150JAA Payment Methods



MR045A150JAA Shipping Methods



If you have any question about MR045A150JAA, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com