


MR065A183FS

MR065A183FS Information

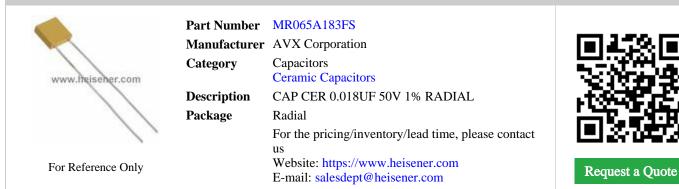

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



MR065A183FS Specifications

Operating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateS (0.001%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.290° L x 0.090° W (7.36mm x 2.28mm)Height - Seated (Max)-Thickness (Max)-	-	
CategoryCapacitorsPackageRadialPackageRadialSeriesMilitary, MIL-PRF-20, Ceralam? MR06Capacitance0.018µFColerance±1%Voltage - Rated50VTemperature CoefficientCOG, NP0Operating Temperature.55°C ~ 125°CFeaturesMilitaryApplications-ApplicationsGeneral PurposeFailure RateS (0.001%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.200° L x 0.090° W (7.36mm x 2.28mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200° (5.08mm)Lead StyleStraight	Manufacturer Part Number	MR065A183FS
Ceramic CapacitorsPackageRadialSeriesMilitary, MIL-PRF-20, Ceralam? MR06Capacitance0.018µFTolerance±1%Voltage - RatedS0VTemperature CoefficientC0G, NP0Operating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateS (0.001%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.300" (7.62mm)Height - Seated (Max)-Thickness (Max)-Lead SpacingC300" (5.08mm)Lead StyleStraight	Manufacturer	AVX Corporation
PackageRadialSeriesMiliary, MIL-PRF-20, Ceralam? MR06Capacitance0.018µFTolerance±1%Voltage - Rated50VTomperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateS (0.001%)Mounting TypeThrough HoleSize / Dimension0.200° L x 0.090° W (7.36mm x 2.28mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200° (5.08mm)Lead StyleStraight	Category	Capacitors
AreaMilitary, MIL-PRF-20, Ceralam? MR06Capacitance0.018µFTolerance±1%Voltage - Rated50VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateS (0.001%)Mounting TypeThrough HoleSize / Dimension0.290° L x 0.090° W (7.36mm x 2.28mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200° (5.08mm)Lead StyleStraight		Ceramic Capacitors
Capacitance0.018µFTolerance±1%Voltage - Rated50VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateS (0.001%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.200" (r.62mm)Height - Seated (Max)-Lead Spacing0.200" (s.08mm)Lead StyleStraight	Package	Radial
Tolerance±1%Voltage - Rated50VTemperature CoefficientC0G, NP0Operating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateS (0.001%)Mounting TypeNongh HolePackage / CaseRadialSize / Dimension0.300° (7.62mm) x 0.28mm)Height - Seated (Max)-Hickness (Max)0.200° (5.08mm)Lead StyleSiaght	Series	Military, MIL-PRF-20, Ceralam? MR06
Voltage - Rated50VTemperature CoefficientC0G, NP0Operating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateS (0.001%)Mounting TypeHolePackage / CaseRadialSize / Dimension0.200" L x 0.090" W (7.36mm x 2.28mm)Height - Seated (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Capacitance	0.018µF
Temperature CoefficientC0G, NP0Operating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateS (0.001%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.290" L x 0.090" W (7.36mm x 2.28mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Tolerance	±1%
Operating Temperature-55°C ~ 125°CFeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateS (0.001%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.290" L x 0.090" W (7.36mm x 2.28mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Voltage - Rated	50V
FeaturesMilitaryRatings-ApplicationsGeneral PurposeFailure RateS (0.001%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.290" L x 0.090" W (7.36mm x 2.28mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Temperature Coefficient	C0G, NP0
Ratings-ApplicationsGeneral PurposeFailure RateS (0.001%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.290" L x 0.090" W (7.36mm x 2.28mm)Height - Seated (Max)0.300" (7.62mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Operating Temperature	-55°C ~ 125°C
ApplicationsGeneral PurposeFailure RateS (0.001%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.290" L x 0.090" W (7.36mm x 2.28mm)Height - Seated (Max)0.300" (7.62mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Features	Military
Failure RateS (0.001%)Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.290" L x 0.090" W (7.36mm x 2.28mm)Height - Seated (Max)0.300" (7.62mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Ratings	-
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.290" L x 0.090" W (7.36mm x 2.28mm)Height - Seated (Max)0.300" (7.62mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Applications	General Purpose
Package / CaseRadialSize / Dimension0.290" L x 0.090" W (7.36mm x 2.28mm)Height - Seated (Max)0.300" (7.62mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Failure Rate	S (0.001%)
Size / Dimension 0.290" L x 0.090" W (7.36mm x 2.28mm) Height - Seated (Max) 0.300" (7.62mm) Thickness (Max) - Lead Spacing 0.200" (5.08mm) Lead Style Straight	Mounting Type	Through Hole
Height - Seated (Max)0.300" (7.62mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Package / Case	Radial
Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Size / Dimension	0.290" L x 0.090" W (7.36mm x 2.28mm)
Lead Spacing0.200" (5.08mm)Lead StyleStraight	Height - Seated (Max)	0.300" (7.62mm)
Lead Style Straight	Thickness (Max)	-
· · · · · · · · · · · · · · · · · · ·	Lead Spacing	0.200" (5.08mm)
Report errors?	Lead Style	Straight
		Report errors?

MR065A183FS Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE EUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

MR065A183FS Payment Methods



MR065A183FS Shipping Methods



If you have any question about MR065A183FS, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com