


MXPLAD6.5KP36AE3

MXPLAD6.5KP36AE3 Information

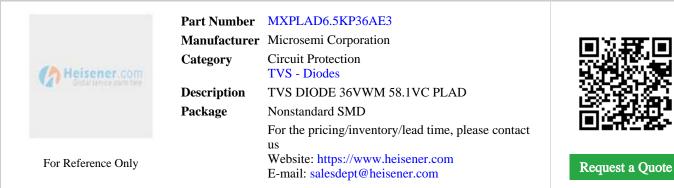

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



MXPLAD6.5KP36AE3 Specifications

Manufacturer Part Number MXPLAD6.5KP36AE3 Manufacturer Microsemi Corporation Category Circuit Protection TVS - Diodes TVS - Diodes Package Nonstandard SMD Series Military, MIL-PRF-19500 Type Zener Unidirectional Channels 1 Bidirectional Channels - Voltage - Reverse Standoff (Typ) 36V Voltage - Breakdown (Min) 40V Voltage - Clamping (Max) @ Ipp 58.1V Current - Peak Pulse (10/1000µs) 111A Power Line Protection Konstandard SMD Applications GeneralPurpose Capacitance @ Frequency - Applications Sint Constant C		
CategoryCircuit ProtectionCategoryCircuit ProtectionPackageNonstandard SMDSeriesMilitary, MIL-PRF-19500TypeZenerUnidirectional Channels1Bidirectional Channels-Voltage - Reverse Standoff (Typ)36VVoltage - Reverse Standoff (Typ)58.1VVoltage - Clamping (Max) @ Ipp58.1VCurrent - Peak Pulse (10/1000µs)111APower - Peak Pulse6500W (6.5kW)Power Line ProtectionNoApplicationsGeneral PurposeCapacitance @ Frequency-Operating TypeSuface MountMounting TypeSuface MountPackage / CaseNonstandard SMDSupplier Device PackagePLAD	Manufacturer Part Number	MXPLAD6.5KP36AE3
TVS - DiodesPackageNonstandard SMDSeriesMilitary, MIL-PRF-19500TypeZenerUnidirectional Channels1Bidirectional Channels-Voltage - Reverse Standoff (Typ)36VVoltage - Breakdown (Min)40VVoltage - Clamping (Max) @ Ipp58.1VCurrent - Peak Pulse (10/1000µs)111APower - Peak Pulse6500W (6.5kW)Power Line ProtectionNoApplicationsGeneral PurposeCapacitance @ Frequency-Operating Temperature-55°C ~ 150°C (TJ)Mounting TypeSurface MountPackage / CaseNonstandard SMDSupplier Device PackagePLAD	Manufacturer	Microsemi Corporation
PackageNonstandard SMDSeriesMilitary, MIL-PRF-19500TypeZenerUnidirectional Channels1Bidirectional Channels-Voltage - Reverse Standoff (Typ)36VVoltage - Breakdown (Min)40VVoltage - Clamping (Max) @ Ipp58.1VCurrent - Peak Pulse (10/1000µs)111APower - Peak Pulse6500W (6.5kW)Power Jine ProtectionNoApplicationsGeneral PurposeCapacitance @ Frequency-Operating Temperature55°C ~ 150°C (TJ)Mounting TypeSunface MountPackage / CaseNonstandard SMDSupplier Device PackagePLAD	Category	Circuit Protection
Numerical SeriesNumerical Military, MIL-PRF-19500SeriesKilitary, MIL-PRF-19500TypeZenerUndirectional Channels1Bidirectional Channels-Voltage - Reverse Standoff (Typ)36VVoltage - Breakdown (Min)40VVoltage - Clamping (Max) @ Ipp58.1VCurrent - Peak Pulse (10/100µs)111APower - Peak Pulse6500W (6.5kW)Power Line ProtectionNoApplicationsGeneral PurposeCapacitance @ Frequency-Operating Temperature55°C ~ 150°C (TJ)Mounting TypeSurface MountPackage / CaseNonstandard SMDSupplier Device PackagePLAD		TVS - Diodes
TypeZenerUnidirectional Channels1Bidirectional Channels-Voltage - Reverse Standoff (Typ)36VVoltage - Reverse Standoff (Typ)40VVoltage - Clamping (Max) @ Ipp58.1VCurrent - Peak Pulse (10/100µs)111APower - Peak Pulse6500W (6.5kW)Power Line ProtectionNoApplicationsGeneral PurposeCupating Temperature-Operating Temperature55° C ~ 150°C (TJ)Pokage / CaseNonstandard SMDSupplier Device PackagePLAD	Package	Nonstandard SMD
NUnidirectional Channels1Bidirectional Channels-Voltage - Reverse Standoff (Typ)36VVoltage - Breakdown (Min)40VVoltage - Clamping (Max) @ Ipp58.1VCurrent - Peak Pulse (10/100µs)111APower - Peak Pulse (10/100µs)6500W (6.5kW)Power Line ProtectionNoApplicationsGeneral PurposeCapacitance @ Frequency-Operating Temperature-55°C ~ 150°C (TJ)Mounting TypeSurface MountPackage / CaseNostandard SMDSupplier Device PackagePLAD	Series	Military, MIL-PRF-19500
Bidirectional Channels-Bidirectional Channels-Voltage - Reverse Standoff (Typ)36VVoltage - Breakdown (Min)40VVoltage - Clamping (Max) @ Ipp58.1VCurrent - Peak Pulse (10/1000µs)111APower - Peak Pulse6500W (6.5kW)Power Line ProtectionNoApplicationsGeneral PurposeCapacitance @ Frequency-Operating Temperature-55°C ~ 150°C (TJ)Mounting TypeSurface MountPackage / CaseNonstandard SMDSupplier Device PackagePLAD	Туре	Zener
Voltage - Reverse Standoff (Typ)36VVoltage - Breakdown (Min)40VVoltage - Clamping (Max) @ Ipp58.1VCurrent - Peak Pulse (10/100µs)111APower - Peak Pulse6500W (6.5kW)Power Line ProtectionNoApplicationsGeneral PurposeCapacitance @ Frequency-Operating Temperature55°C ~ 150°C (TJ)Mounting TypeSurface MountPackage / CaseNoSupplier Device PackagePLAD	Unidirectional Channels	1
Voltage - Breakdown (Min)40VVoltage - Clamping (Max) @ Ipp58.1VCurrent - Peak Pulse (10/1000µs)111APower - Peak Pulse6500W (6.5kW)Power Line ProtectionNoApplicationsGeneral PurposeCapacitance @ Frequency-Operating Temperature-55°C ~ 150°C (TJ)Mounting TypeSurface MountPackage / CaseNonstandard SMDSupplier Device PackagePLAD	Bidirectional Channels	-
Voltage - Clamping (Max) @ Ipp58.1VCurrent - Peak Pulse (10/1000µs)111APower - Peak Pulse6500W (6.5kW)Power Line ProtectionNoApplicationsGeneral PurposeCapacitance @ Frequency-Operating Temperature-55°C ~ 150°C (TJ)Mounting TypeSurface MountPackage / CaseNonstandard SMDSupplier Device PackagePLAD	Voltage - Reverse Standoff (Typ)	36V
Current - Peak Pulse (10/1000µs)111APower - Peak Pulse6500W (6.5kW)Power Line ProtectionNoApplicationsGeneral PurposeCapacitance @ Frequency-Operating Temperature-55°C ~ 150°C (TJ)Mounting TypeSurface MountPackage / CaseNonstandard SMDSupplier Device PackagePLAD	Voltage - Breakdown (Min)	40V
Power - Peak Pulse6500W (6.5kW)Power Line ProtectionNoApplicationsGeneral PurposeCapacitance @ Frequency-Operating Temperature-55°C ~ 150°C (TJ)Mounting TypeSurface MountPackage / CaseNonstandard SMDSupplier Device PackagePLAD	Voltage - Clamping (Max) @ Ipp	58.1V
Power Line ProtectionNoApplicationsGeneral PurposeCapacitance @ Frequency-Operating Temperature-55°C ~ 150°C (TJ)Mounting TypeSurface MountPackage / CaseNonstandard SMDSupplier Device PackagePLAD	Current - Peak Pulse (10/1000µs)	111A
ApplicationsGeneral PurposeCapacitance @ Frequency-Operating Temperature-55°C ~ 150°C (TJ)Mounting TypeSurface MountPackage / CaseNonstandard SMDSupplier Device PackagePLAD	Power - Peak Pulse	6500W (6.5kW)
Capacitance @ Frequency-Operating Temperature-55°C ~ 150°C (TJ)Mounting TypeSurface MountPackage / CaseNonstandard SMDSupplier Device PackagePLAD	Power Line Protection	No
Operating Temperature-55°C ~ 150°C (TJ)Mounting TypeSurface MountPackage / CaseNonstandard SMDSupplier Device PackagePLAD	Applications	General Purpose
Mounting TypeSurface MountPackage / CaseNonstandard SMDSupplier Device PackagePLAD	Capacitance @ Frequency	-
Package / CaseNonstandard SMDSupplier Device PackagePLAD	Operating Temperature	-55°C ~ 150°C (TJ)
Supplier Device Package PLAD	Mounting Type	Surface Mount
	Package / Case	Nonstandard SMD
Report errors?	Supplier Device Package	PLAD
		Report errors?

MXPLAD6.5KP36AE3 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

DISCOVER

MXPLAD6.5KP36AE3 Payment Methods



MXPLAD6.5KP36AE3 Shipping Methods



If you have any question about MXPLAD6.5KP36AE3, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com