


MY4 AC220/240 (S)

MY4 AC220/240 (S) Information



E-mail: salesdept@heisener.com

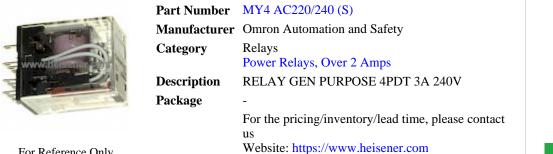

Request a Quote

For Reference Only

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



MY4 AC220/240 (S) Specifications

Manufacturer Part Number MY4 AC220/240 (S) Manufacturer Omron Automation and Safety Category Relays Power Relays, Over 2 Amps Power Relays, Over 2 Amps Package - Series MY Relay Type General Purpose Coil Type Non Latching Coil Current 4.2mA Coil Current 4.2mA Cotact Form 44DT (4 Form C) Cotact Rating (Current) 3A Switching Voltage 250VAC, 125VDC - Max Turn On Voltage (Max) 192 VAC Quest Time 20ms Release Time Oms Features - Features - Features -		
CategoryRelaysPackage-SeriesMYRelay TypeGeneral PurposeCoil TypeNon LatchingCoil Current4.2mACold Current40VACContact Form4PDT (4 Form C)Contact Rating (Current)3ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)192 VACCurrent20msRelease TimeOmsRelease Time-Features-Funding TypeSocketableFunding TypeJeg In	Manufacturer Part Number	MY4 AC220/240 (S)
PackagePower Relays, Over 2 AmpsPackage-SeriesMYRelay TypeGeneral PurposeCoil TypeNon LatchingCoil Current4.2mACoil Voltage240VACContact Form4PDT (4 Form C)Contact Rating (Current)3ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)192 VACOperate Time20msRelease Time-Features-Mounting TypeSocketableTermination StylePug In	Manufacturer	Omron Automation and Safety
Package-SeriesMYRelay TypeGeneral PurposeCoil TypeNon LatchingCoil Current4.2mACoil Voltage240VACContact Form4PDT (4 Form C)Contact Rating (Current)3ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)192 VACOperate Time20msRelease Time-Features-Mounting TypeSocketableTermination StyleHug In	Category	Relays
SeriesMYRelay TypeGeneral PurposeCoil TypeNon LatchingCoil Current4.2mACoil Voltage240VACContact Form4PDT (4 Form C)Contact Rating (Current)3ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)192 VACOperate Time20msRelase Time20msFeatures-Munting TypeSocketableTermination StyleHug In		Power Relays, Over 2 Amps
Relay TypeGeneral PurposeCoil TypeNon LatchingCoil Current4.2mACoil Voltage240VACContact Form4PDT (4 Form C)Contact Rating (Current)3ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Main)192 VACOperate Time20msRelayes Time20msFeatures-Mounting TypeSocketableTermination StyleHug In	Package	-
Coil TypeNon LachingCoil Current4.2mACoil Voltage240VACContact Form4PDT (4 Form C)Contact Rating (Current)3ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)192 VACPurn Off Voltage (Min)20msRelease Time30msFeatures-Mounting TypeSockataleTermination StyleHug In	Series	MY
Coil Current4.2mACoil Voltage240VACContact Form4PDT (4 Form C)Contact Rating (Current)3ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)192 VACTurn Off Voltage (Min)72 VACOperate Time20msRelease Time20msFeatures-Mounting TypeSocketableTermination StylePlug In	Relay Type	General Purpose
Coil Voltage240VACContact Form4PDT (4 Form C)Contact Rating (Current)3ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)192 VACTurn Off Voltage (Min)72 VACOperate Time20msRelease Time0Features-Mounting TypeSocketableTermination StylePing In	Coil Type	Non Latching
Contact Form4PDT (4 Form C)Contact Rating (Current)3ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)192 VACTurn Off Voltage (Min)72 VACOperate Time20msRelease Times-Features-Mounting TypeSocketableTermination StylePlug In	Coil Current	4.2mA
Contact Rating (Current)3ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)192 VACTurn Off Voltage (Min)72 VACOperate Time20msRelease Time20msFeatures-Mounting TypeSocketableTermination StylePlug In	Coil Voltage	240VAC
Switching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)192 VACTurn Off Voltage (Min)72 VACOperate Time20msRelease Time20msFeatures-Mounting TypeSocketableTermination StylePlug In	Contact Form	4PDT (4 Form C)
Turn On Voltage (Max)192 VACTurn Off Voltage (Min)72 VACOperate Time20msRelease Time20msFeatures-Mounting TypeSocketableTermination StylePlug In	Contact Rating (Current)	3A
Turn Off Voltage (Min)72 VACOperate Time20msRelease Time20msFeatures-Mounting TypeSocketableTermination StylePlug In	Switching Voltage	250VAC, 125VDC - Max
Operate Time20msRelease Time20msFeatures-Mounting TypeSocketableTermination StylePlug In	Turn On Voltage (Max)	192 VAC
Release Time20msFeatures-Mounting TypeSocketableTermination StylePlug In	Turn Off Voltage (Min)	72 VAC
Features-Mounting TypeSocketableTermination StylePlug In	Operate Time	20ms
Mounting TypeSocketableTermination StylePlug In	Release Time	20ms
Termination Style Plug In	Features	-
	Mounting Type	Socketable
Report errors?	Termination Style	Plug In
		Report errors?

MY4 AC220/240 (S) Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE BUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

MY4 AC220/240 (S) Payment Methods



MY4 AC220/240 (S) Shipping Methods



If you have any question about MY4 AC220/240 (S), please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com