

NPPC061LFBN-RC

NPPC061LFBN-RC Information

		NPPC061LFBN-RC Sullins Connector Solutions		
Contact and the second terms	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets		
	Description	CONN HEADER .100" 6POS		
	Package	-	回於於米	
For Reference Only		For the pricing/inventory/lead time, please contact		
		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote	

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



NPPC061LFBN-RC Specifications

Manufacturer Part NumberNPPC061LFBN-RCManufacturerSullins Connector SolutionsCategoryConnectors InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series-Connector TypeHeaderContact TypeFemale SocketSyleBoard to BoardNumber of Positions6Number of Positions Loaded1010° (2.54mm)Number of Ross1Number of Ross0.100° (2.54mm)Number of Ross1SyleSolerNumber of Ross0.100° (2.54mm)Number of Ross1Starting DelineSolerNumber of Ross0.100° (2.54mm)Number of Ross0.100° (2.54mm)Number of Ross1Starting DelineSolerNumber of Ross1Starting DelineSolerNumber of Ross1Starting DelineSolerStarting TypeSolerStarting TypeSolerStarting TypeSolerStarting TypeSolerStarting TypeSolerStarting DelineSolerStarting DelineSoler				
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series-Connector TypeHeaderConnector TypeFemale SocketStyleBoard to BoardNumber of Positions6Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows1Number of Rows0.100° (2.54mm)Number of Rows1Number of Rows0.100° (2.54mm)Number of Rows0.100° (2.54mm)Number of Rows1SolderSolderNouting TypeSolderContact Finish - MatingSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.335° (8.51mm)Contact Length - Post0.126° (3.00mm)	Manufacturer Part Number	NPPC061LFBN-RC		
Actanguiar Connectors - Headers, Receptacles, Female SocketsPackage-Series-Connector TypeHeaderContact TypeFemale SocketStyleBoard to BoardNumber of Positions6Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - MatingSolderMounting TypePitch - MatingTerminationSolderFastening TypeGoldContact Finish - MatingGoldContact Finish - MatingGoldContact Finish Thickness - MatingHashInsulation ColorBlackInsulation Height0.335° (8.51mm)Contact Length - Post0.126° (3.20mm)	Manufacturer	Sullins Connector Solutions		
Package-Series-Connector TypeHeaderContact TypeFemale SocketStyleBoard to BoardNumber of Positions6Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypeGoldContact Finish - MatingGoldContact Finish - MatingBiashInsulation ColorBiackInsulation Height0.335" (8.51mm)Contact Length - Post0.126" (3.20mm)	Category	Connectors, Interconnects		
Series-Connector TypeHeaderContact TypeFemale SocketStyleBoard to BoardNumber of Positions6Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleFareninationSolderFastening TypeGoldContact Finish - MatingGoldInsulation ColorBackInsulation Height0.335" (8.51mm)Contact Length - Post0.126" (3.20mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets		
Connector TypeHeaderContact TypeFemale SocketStyleBoard to BoardNumber of Positions6Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderContact Finish - MatingGoldContact Finish - MatingFashInsulation ColorFashInsulation ColorBlackInsulation Height0.35" (8.51mm)Contact Length - Post0.126" (3.20mm)	Package	-		
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions6Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeOlderTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.335" (8.51mm)Contact Length - Post0.126" (3.20mm)	Series	-		
StyleBoard to BoardNumber of Positions6Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingFlashInsulation ColorBlackInsulation Height0.335" (8.51mm)Contact Length - Post0.126" (3.20mm)	Connector Type	Header		
Number of Positions6Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.335" (8.51mm)Contact Length - Post0.126" (3.20mm)	Contact Type	Female Socket		
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.335" (8.51mm)Contact Length - Post0.126" (3.20mm)	Style	Board to Board		
Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting Type-TerminationSolderFastening TypePush-PullContact Finish - MatingFlashInsulation ColorBlackInsulation Height0.335" (8.51mm)Contact Length - Post0.126" (3.20mm)	Number of Positions	6		
Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.335" (8.51mm)Contact Length - Post0.126" (3.20mm)	Number of Positions Loaded	All		
Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.335" (8.51mm)Contact Length - Post0.126" (3.20mm)	Pitch - Mating	0.100" (2.54mm)		
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.335" (8.51mm)Contact Length - Post0.126" (3.20mm)	Number of Rows	1		
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.335" (8.51mm)Contact Length - Post0.126" (3.20mm)	Row Spacing - Mating	-		
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.335" (8.51mm)Contact Length - Post0.126" (3.20mm)	Mounting Type	Through Hole		
Contact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.335" (8.51mm)Contact Length - Post0.126" (3.20mm)	Termination	Solder		
Contact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.335" (8.51mm)Contact Length - Post0.126" (3.20mm)	Fastening Type	Push-Pull		
Insulation ColorBlackInsulation Height0.335" (8.51mm)Contact Length - Post0.126" (3.20mm)	Contact Finish - Mating	Gold		
Insulation Height0.335" (8.51mm)Contact Length - Post0.126" (3.20mm)	Contact Finish Thickness - Mating	Flash		
Contact Length - Post 0.126" (3.20mm)	Insulation Color	Black		
-	Insulation Height	0.335" (8.51mm)		
Operating Temperature $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$	Contact Length - Post	0.126" (3.20mm)		
	Operating Temperature	-40°C ~ 105°C		
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0		

Contact Finish - Post	Gold	
Mated Stacking Heights	-	
Ingress Protection	-	
Features	-	
		Report errors?





Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

NPPC061LFBN-RC Payment Methods

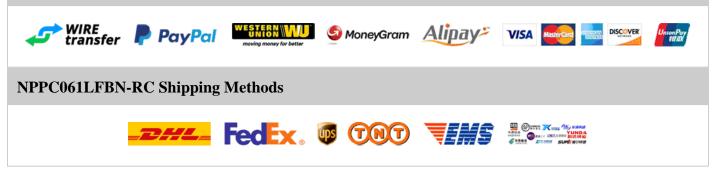

If you have any question about NPPC061LFBN-RC, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com