

NPPC141KFXC-RC

NPPC141KFXC-RC Information

		NPPC141KFXC-RC Sullins Connector Solutions	
www.helsener.com	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description Package	CONN FMALE 14POS .1" SMD GOLD	
For Reference Only	I atkage	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



NPPC141KFXC-RC Specifications

Manufacturer Part NumberNPPC141KFXC-RCManufacturerSullins Connector SolutionsCategoryConnectors InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series-Connector TypeHeader, Top or Bottom EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions14Number of Positions Loaded1Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeSurface MountFerminationSolderFastening TypePush-Pull				
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series-Connector TypeHeader, Top or Bottom EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions14Number of Positions Loaded1Pitch - Mating100" (2.54mm)Number of Rows1Number of Rows1Row Spacing - MatingSurface MountMounting TypeSurface MountState MountSurface MountState MountSurface MountTerminationSolder	Manufacturer Part Number	NPPC141KFXC-RC		
Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series-Connector TypeHeader, Top or Bottom EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions14Number of Positions LoadedNillPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - MatingSurface MountMounting TypeSurface MountSolderSolder	Manufacturer	Sullins Connector Solutions		
Package-Series-Connector TypeHeader, Top or Bottom EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions14Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeSolderStatementSolder	Category	Connectors, Interconnects		
Series-Connector TypeHeader, Top or Bottom EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions14Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeSurface MountFerminationSolder		Rectangular Connectors - Headers, Receptacles, Female Sockets		
Connector TypeHeader, Top or Bottom EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions14Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeSufface MountTerminationSolder	Package	-		
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions14Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeSurface MountTerminationSolder	Series	-		
StyleBoard to BoardNumber of Positions14Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeSurface MountTerminationSolder	Connector Type	Header, Top or Bottom Entry		
Number of Positions14Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeSurface MountTerminationSolder	Contact Type	Female Socket		
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeSurface MountTerminationSolder	Style	Board to Board		
Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeSurface MountTerminationSolder	Number of Positions	14		
Number of Rows1Row Spacing - Mating-Mounting TypeSurface MountTerminationSolder	Number of Positions Loaded	All		
Row Spacing - Mating-Mounting TypeSurface MountTerminationSolder	Pitch - Mating	0.100" (2.54mm)		
Mounting TypeSurface MountTerminationSolder	Number of Rows	1		
Termination Solder	Row Spacing - Mating	-		
	Mounting Type	Surface Mount		
Fastening Type Push-Pull	Termination	Solder		
	Fastening Type	Push-Pull		
Contact Finish - Mating Gold	Contact Finish - Mating	Gold		
Contact Finish Thickness - Mating Flash	Contact Finish Thickness - Mating	Flash		
Insulation Color Black	Insulation Color	Black		
Insulation Height 0.279" (7.10mm)	Insulation Height	0.279" (7.10mm)		
Contact Length - Post -	Contact Length - Post	-		
Operating Temperature $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$	Operating Temperature	-40°C ~ 105°C		
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0		

Contact Finish - Post	Gold	
Mated Stacking Heights	-	
Ingress Protection	-	
Features	-	
		Report errors?





Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

NPPC141KFXC-RC Payment Methods

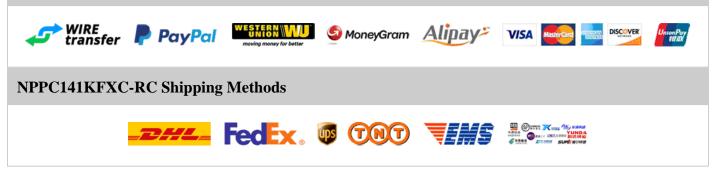

If you have any question about NPPC141KFXC-RC, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com