

NPPC142LJBN-RC

NPPC142LJBN-RC Information

		NPPC142LJBN-RC Sullins Connector Solutions Connectors, Interconnects	
Containance case term		Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	CONN HEADER .100" 28POS	
	Package	-	间的企业
For Reference Only		For the pricing/inventory/lead time, please contact	
		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



NPPC142LJBN-RC Specifications

Manufacturer Part Number NPPC142LJBN-RC Manufacturer Sullins Connector Solutions Category Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets Package - Series - Contact Type Header Contact Type Header Contact Type Board to Board Number of Positions 28 Number of Positions Loaded All Pitch - Mating 0.100° (2.54mm) Number of Rows 2 Row Spacing - Mating Solder Mounting Type Through Hole, Right Angle Yent Finish - Mating Gold Contact Finish - Mating Gold Contact Finish Thickness - Mating Black Insulation Color Black Insulation Height 0.200° (Somm) Contact Length - Post 0.124° (3.15mm) Quergergergure 40°C ~ 105°C			
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series-Connector TypeHeaderContact TypeFemale SocketStyleBoard to BoardNumber of Positions28Number of Positions LoadedAllNumber of Rows2Number of Rows0.100° (2.54mm)Number of Rows2Number of Rows0.100° (2.54mm)Number of RowsSolderNumber of Rows <td>Manufacturer Part Number</td> <td>NPPC142LJBN-RC</td>	Manufacturer Part Number	NPPC142LJBN-RC	
Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series-Connector TypeHeaderContact TypeBoard to BoardStyleBoard to BoardNumber of Positions28Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypeGoldContact Finish - MatingGoldContact Finish - MatingFashSolderBlackInsulation ColorBlackInsulation Height0.200" (5.08mm)Contact Length - Post0.124" (3.15mm)Operating Temperature40°C ~ 105°C	Manufacturer	Sullins Connector Solutions	
Package-Series-Connector TypeHeaderContact TypeFemale SocketStyleBoard to BoardNumber of Positions28Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting TypeOnlow (2.54mm)YerminationSolderFarminationSolderFastening TypePush-PullContact Finish - MatingGoldSoltar Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.200° (5.08mm)Contact Length - Post0.124° (3.15mm)Operating Temperature40°C ~ 105°C	Category	Connectors, Interconnects	
Series-Connector TypeHeaderContact TypeFemale SocketStyleBoard to BoardNumber of Positions28Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting TypeOnton (2.54mm)Mounting TypeSolderTerminationSolderContact Finish - MatingGoldContact Finish - MatingGoldStation ColorBackInsulation ColorBackInsulation Height0.200° (5.08mm)Contact Fungh-Post0.124° (3.15mm)Contact Fungh-Post0.124° (3.15mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets	
Connector TypeHeaderContact TypeFemale SocketStyleBoard to BoardNumber of Positions28Number of Positions LoadedAllNumber of Positions Loaded0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting Type0.100° (2.54mm)ForminationSolderTerminationSolderContact Finish - MatingSolderContact Finish - MatingGoldIsulation ColorBackIsulation Finish Tickness - MatingBickIsulation Height0.200° (5.08mm)Contact FungeType0.124° (3.15mm)Operating Temperature40°C~105°C	Package	-	
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions28Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.200" (5.08mm)Contact Length - Post0.124" (3.15mm)Operating Temperature40°C ~ 105°C	Series	-	
StyleBoard to BoardNumber of Positions28Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.200" (5.08mm)Contact Length - Post0.124" (3.15mm)Operating Temperature40°C ~ 105°C	Connector Type	Header	
Number of Positions 28 Number of Positions Loaded All Pitch - Mating 0.100" (2.54mm) Number of Rows 2 Row Spacing - Mating 0.100" (2.54mm) Mounting Type 0.100" (2.54mm) Termination 0.100" (2.54mm) Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Contact Finish Thickness - Mating Flash Insulation Color Black Insulation Height 0.200" (5.08mm) Contact Length - Post 0.124" (3.15mm) Operating Temperature -40°C ~ 105°C	Contact Type	Female Socket	
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.200" (5.08mm)Contact Length - Post0.124" (3.15mm)Operating Temperature-40°C ~ 105°C	Style	Board to Board	
Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldRouting ColorFlashInsulation ColorBlackInsulation Height0.200" (5.08mm)Contact Length - Post0.124" (3.15mm)Operating Temperature-40°C ~ 105°C	Number of Positions	28	
Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.200" (5.08mm)Contact Length - Post0.124" (3.15mm)Operating Temperature-40°C ~ 105°C	Number of Positions Loaded	All	
Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.200" (5.08mm)Contact Length - Post0.124" (3.15mm)Operating Temperature-40°C ~ 105°C	Pitch - Mating	0.100" (2.54mm)	
Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.200" (5.08mm)Contact Length - Post0.124" (3.15mm)Operating Temperature40°C ~ 105°C	Number of Rows	2	
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.200" (5.08mm)Contact Length - Post0.124" (3.15mm)Operating Temperature40°C ~ 105°C	Row Spacing - Mating	0.100" (2.54mm)	
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.200" (5.08mm)Contact Length - Post0.124" (3.15mm)Operating Temperature40°C ~ 105°C	Mounting Type	Through Hole, Right Angle	
Contact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.200" (5.08mm)Contact Length - Post0.124" (3.15mm)Operating Temperature-40°C ~ 105°C	Termination	Solder	
Contact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.200" (5.08mm)Contact Length - Post0.124" (3.15mm)Operating Temperature-40°C ~ 105°C	Fastening Type	Push-Pull	
Insulation ColorBlackInsulation Height0.200" (5.08mm)Contact Length - Post0.124" (3.15mm)Operating Temperature-40°C ~ 105°C	Contact Finish - Mating	Gold	
Insulation Height 0.200" (5.08mm) Contact Length - Post 0.124" (3.15mm) Operating Temperature -40°C ~ 105°C	Contact Finish Thickness - Mating	Flash	
Contact Length - Post0.124" (3.15mm)Operating Temperature-40°C ~ 105°C	Insulation Color	Black	
Operating Temperature $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$	Insulation Height	0.200" (5.08mm)	
	Contact Length - Post	0.124" (3.15mm)	
Material Flammability Rating UL94 V-0	Operating Temperature	$-40^{\circ}C \sim 105^{\circ}C$	
	Material Flammability Rating	UL94 V-0	

Contact Finish - Post	Gold	
Mated Stacking Heights	-	
Ingress Protection	-	
Features	-	
		Report errors?





Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

NPPC142LJBN-RC Payment Methods

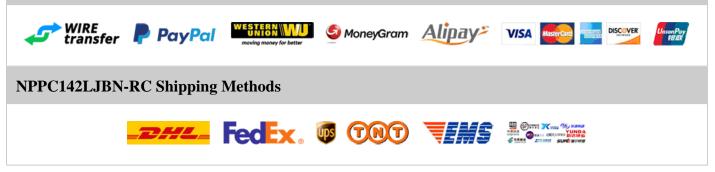

If you have any question about NPPC142LJBN-RC, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com