

# NPPN271BFCN-RC

### NPPN271BFCN-RC Information

		NPPN271BFCN-RC Sullins Connector Solutions	
Container com	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	CONN HEADER .079" 27POS	33447.223
	Package	-	回泳派着新
For Reference Only		For the pricing/inventory/lead time, please contact	
		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

## **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



# NPPN271BFCN-RC Specifications

Manufacturer Part NumberNPPN271BFCN-RCManufacturerSullins Connector SolutionsCategoryConnectors SolutionsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series-Connector TypeHeaderContact TypeFemale SocketStyleBoard to BoardNumber of Positions27Number of Positions LoadedAllNumber of Rows1Number of Rows1Number of RowsSolderNumber of RowsSolderString TypeSolderString TypeGoldString TypeSolderString TypeSolder <tr< th=""><th></th><th></th></tr<>				
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series-Connector TypeHeaderConnector TypeFemale SocketStyleBoard to BoardNumber of Positions27Number of Positions Loaded1Pich - Mating0.709° (2.00mm)Number of Rows1Number of Rows1Number of Rows500 (2.00mm)Number of Rows1Number of Rows500 (2.00mm)Number of Rows1Staffeng Public Mating500 (2.00mm)Number of Rows1Staffeng Public Mating500 (2.00mm)Number of Rows1Staffeng Public Mating500 (2.00mm)Staffeng Public Mating500 (2.00mm)S	Manufacturer Part Number	NPPN271BFCN-RC		
Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series-Connector TypeHeaderContact TypeFemale SocketStyleBoard to BoardNumber of Positions27Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Young TypeSolderFerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlack	Manufacturer	Sullins Connector Solutions		
Package.Series.Connector TypeHeaderContact TypeFemale SocketStyleBoard to BoardNumber of Positions27Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating.Young TypeSolderFreminationSolderForminationSolderContact Finish - MatingGoldContact Finish - MatingBack	Category	Connectors, Interconnects		
Series-Series-Connector TypeHeaderContact TypeFemale SocketStyleBoard to BoardNumber of Positions27Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleFerminationSolderFastening TypeQualContact Finish - MatingGoldContact Finish - MatingBack		Rectangular Connectors - Headers, Receptacles, Female Sockets		
Connector TypeHeaderContact TypeFemale SocketStyleBoard to BoardNumber of Positions27Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingFishInsulation ColorHaskInsulation ColorBlack	Package	-		
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions27Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeSolderFastening TypeSolderFastening TypeGoldContact Finish - MatingGoldInsulation ColorBlack	Series	-		
StyleBoard to BoardStyleBoard to BoardNumber of Positions27Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldIonater Finish Thickness - MatingBlack	Connector Type	Header		
Number of Positions27Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldIontact Finish Thickness - MatingFlashBackBlack	Contact Type	Female Socket		
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldKontact Finish Thickness - MatingFlashBackBlack	Style	Board to Board		
Pitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingFlashSolderFlashIsulation ColorBlack	Number of Positions	27		
Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldFontact Finish Thickness - MatingFlashInsulation ColorBlack	Number of Positions Loaded	All		
Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldFontact Finish Thickness - MatingFlashBackBlack	Pitch - Mating	0.079" (2.00mm)		
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlack	Number of Rows	1		
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlack	Row Spacing - Mating	-		
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlack	Mounting Type	Through Hole		
Contact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlack	Termination	Solder		
Contact Finish Thickness - MatingFlashInsulation ColorBlack	Fastening Type	Push-Pull		
Insulation Color Black	Contact Finish - Mating	Gold		
	Contact Finish Thickness - Mating	Flash		
Insulation Height 0.173" (4.40mm)	Insulation Color	Black		
	Insulation Height	0.173" (4.40mm)		
Contact Length - Post 0.094" (2.40mm)	Contact Length - Post	0.094" (2.40mm)		
Operating Temperature $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$	Operating Temperature	-40°C ~ 105°C		
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0		

Contact Finish - Post	Gold	
Mated Stacking Heights	-	
Ingress Protection	-	
Features	-	
		Report errors?





#### **Quality Guarantees**


We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

### NPPN271BFCN-RC Payment Methods

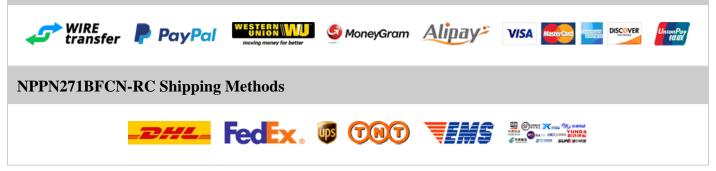

If you have any question about NPPN271BFCN-RC, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com