

NPRN094EFCN-RC

NPRN094EFCN-RC Information

Heisener.com	Manufacturer	NPRN094EFCN-RC Sullins Connector Solutions	ang sa
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	CONN HEADER .079" 36POS	200,000 (00) - 7220 (00) - 7220 (00)
	Package	-	国際設備
For Reference Only		For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



NPRN094EFCN-RC Specifications

Manufacturer Part NumberNPRN094EFCN-RCManufacturerSulins Connector SolutionsCategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series-Connector TypeHeaderConnector TypeForkedStyleBoard BoardNumber of Positions LoadedAlNumber of Positions Loaded0.079° (2.00mm)Number of Rows4Row Spacing - MatingSolderMounting TypeThrough HoleForkating SolderSolderForniationSolderForsteining TypeSolderForsteining TypeSolderForsteinish ThatingSolderForsteinish ThatingSolderForsteinish Thickness - MatingSolderForsteinish Thicknest TypeSolderF		
CategoryConnectors - Headers, Receptacles, Female SocketsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series-Connector TypeHeaderContact TypeForkedSochort TypeBoard to BoardNumber of Positions36Number of Positions LoadedAllNumber of Rows4Number of Rows0079°(2.00mm)Number of RowsSolderNonging - MatingSolderNonging TypeSolderFerninationSolderContact Finish - MatingOujn (0.51µm)Insulation ColorBackInsulation Finish - MatingSolderInsulation Finish - MatingSo	Manufacturer Part Number	NPRN094EFCN-RC
Package.Series.Connector TypeHeaderContact TypeForkedStyleBoard to BoardNumber of Positions36Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleForsteining TypeQuin (0.51µm)Contact Finish - Mating0.019" (2.00mm)Number of PositionsSolderFastening TypeQuin (0.51µm)Fontact Finish - Mating0.094" (2.40mm)Insulation ColorBlackInsulation Height0.250" (6.35mm)Operating Temperature40°C ~ 105°C	Manufacturer	Sullins Connector Solutions
Package.Series.Connector TypeHeaderContact TypeForkedStyleBoard to BoardNumber of Positions36Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish - Mating0.019" (0.51µm)Insulation ColorBlackInsulation Height0.250" (6.35mm)Contact Length - Post0.094" (2.40mm)Operating Temperature40°C ~ 105°C	Category	Connectors, Interconnects
Series-Connector TypeHeaderContact TypeForkedStyleBoard to BoardNumber of Positions36Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HolePerminationSolderFastening TypeOldContact Finish - MatingOldContact Finish - MatingOldInsulation ColorBlackInsulation Height0.250" (6.35mm)Insulation Height0.094" (2.40mm)Operating Temperature40°C ~ 105°C		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeHeaderContact TypeForkedStyleBoard to BoardNumber of Positions36Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypeOshContact Finish - MatingOidInsulation ColorBlackInsulation Height0.250" (6.35mm)Contact Length - Post0.094" (2.40mm)Operating Temperature40°C ~ 105°C	Package	-
Contact TypeForkedStyleBoard to BoardNumber of Positions36Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating0.019" (0.51µm)Insulation ColorBlackInsulation Height0.250" (6.35mm)Contact Length - Post0.094" (2.40mm)Operating Temperature-40°C ~ 105°C	Series	-
StyleBoard to BoardNumber of Positions36Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.250" (6.35mm)Contact Length - Post0.094" (2.40mm)Operating Temperature40°C ~ 105°C	Connector Type	Header
Number of Positions 36 Number of Positions Loaded All Pitch - Mating 0.079" (2.00mm) Number of Rows 4 Row Spacing - Mating 0.079" (2.00mm) Mounting Type Dorgy" (2.00mm) Mounting Type Through Hole Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Insulation Color Black Insulation Height 0.250" (6.35mm) Operating Temperature 40°C ~ 105°C	Contact Type	Forked
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJuin (0.51µm)Insulation ColorBlackInsulation Height0.250" (6.35mm)Contact Length - Post0.094" (2.40mm)Operating Temperature-40°C ~ 105°C	Style	Board to Board
Pitch - Mating0.079" (2.00mm)Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation Height0.250" (6.35mm)Contact Length - Post0.094" (2.40mm)Operating Temperature40°C ~ 105°C	Number of Positions	36
Number of Rows4Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.250" (6.35mm)Contact Length - Post0.094" (2.40mm)Operating Temperature-40°C ~ 105°C	Number of Positions Loaded	All
Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating2/µin (0.51µm)Insulation ColorBlackInsulation Height0.250" (6.35mm)Contact Length - Post0.094" (2.40mm)Operating Temperature40°C ~ 105°C	Pitch - Mating	0.079" (2.00mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.250" (6.35mm)Contact Length - Post0.094" (2.40mm)Operating Temperature-40°C ~ 105°C	Number of Rows	4
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.250" (6.35mm)Contact Length - Post0.094" (2.40mm)Operating Temperature-40°C ~ 105°C	Row Spacing - Mating	0.079" (2.00mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.250" (6.35mm)Contact Length - Post0.094" (2.40mm)Operating Temperature-40°C ~ 105°C	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating $20\mu in (0.51\mu m)$ Insulation ColorBlackInsulation Height $0.250" (6.35mm)$ Contact Length - Post $0.094" (2.40mm)$ Operating Temperature -40° C ~ 105° C	Termination	Solder
Contact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.250" (6.35mm)Contact Length - Post0.094" (2.40mm)Operating Temperature-40°C ~ 105°C	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.250" (6.35mm)Contact Length - Post0.094" (2.40mm)Operating Temperature-40°C ~ 105°C	Contact Finish - Mating	Gold
Insulation Height0.250" (6.35mm)Contact Length - Post0.094" (2.40mm)Operating Temperature-40°C ~ 105°C	Contact Finish Thickness - Mating	20µin (0.51µm)
Contact Length - Post0.094" (2.40mm)Operating Temperature-40°C ~ 105°C	Insulation Color	Black
Operating Temperature $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$	Insulation Height	0.250" (6.35mm)
	Contact Length - Post	0.094" (2.40mm)
Metanial Flammahility Dating UII 04 V 0	Operating Temperature	$-40^{\circ}C \sim 105^{\circ}C$
Material Fianinability Rating 0L94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?





Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

NPRN094EFCN-RC Payment Methods

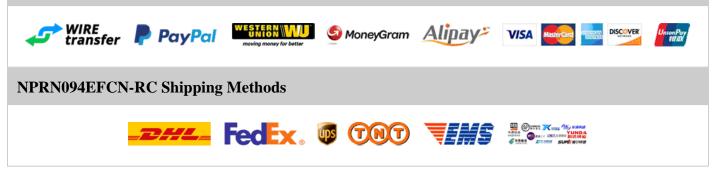

If you have any question about NPRN094EFCN-RC, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com