

# NPTC392KFMS-RC

### NPTC392KFMS-RC Information

www.helsener.com		NPTC392KFMS-RC Sullins Connector Solutions Connectors, Interconnects Rectangular Connectors - Headers, Receptacles,	
	Description	Female Sockets CONN FEMALE 78POS DL .1" TIN SMD	
	Package	- For the pricing/inventory/lead time, please contact us	
For Reference Only		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

### **Certified Quality**


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



# NPTC392KFMS-RC Specifications

Manufacturer Part NumberNPTC392KFMS-RCManufacturerSullins Connector SolutionsCategoryConnectors, InterconnectsPackage-Series-Connector TypeHeaderContact TypeSocketSyleBoard to BoardNumber of Positions LoadedAllNumber of Positions Loaded0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting TypeSulface MountFerninationSolder<		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series-Connector TypeHeaderContact TypeFemale SocketStyleBoard to BoardNumber of Positions78Number of Positions Loaded1.00° (2.54mm)Pitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - MatingSurface MountMounting TypeSurface MountFastening TypePush-Pull	Manufacturer Part Number	NPTC392KFMS-RC
Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series-Connector TypeHeaderContact TypeFemale SocketStyleBoard to BoardNumber of Positions78Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - MatingSurface MountMounting TypeSurface MountFastening TypePush-Pull	Manufacturer	Sullins Connector Solutions
Package-Series-Connector TypeHeaderContact TypeFemale SocketStyleBoard to BoardNumber of Positions78Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountFreminationSolderFastening TypePush-Pull	Category	Connectors, Interconnects
Series-Connector TypeHeaderContact TypeFemale SocketStyleBoard to BoardNumber of Positions78Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountFastening TypePush-Pull		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeHeaderContact TypeFemale SocketStyleBoard to BoardNumber of Positions78Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountFastening TypePush-Pull	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions78Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-Pull	Series	-
StyleBoard to BoardNumber of Positions78Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-Pull	Connector Type	Header
Number of Positions78Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-Pull	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-Pull	Style	Board to Board
Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-Pull	Number of Positions	78
Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-Pull	Number of Positions Loaded	All
Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-Pull	Pitch - Mating	0.100" (2.54mm)
Mounting TypeSurface MountTerminationSolderFastening TypePush-Pull	Number of Rows	2
Termination Solder   Fastening Type Push-Pull	Row Spacing - Mating	0.100" (2.54mm)
Fastening Type Push-Pull	Mounting Type	Surface Mount
	Termination	Solder
	Fastening Type	Push-Pull
Contact Finish - Mating Tin	Contact Finish - Mating	Tin
Contact Finish Thickness - Mating -	Contact Finish Thickness - Mating	-
Insulation Color Black	Insulation Color	Black
Insulation Height 0.299" (7.60mm)	Insulation Height	0.299" (7.60mm)
Contact Length - Post -	Contact Length - Post	-
Operating Temperature $-40^{\circ}\text{C} \sim 125^{\circ}\text{C}$	Operating Temperature	-40°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?





#### **Quality Guarantees**


We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

# NPTC392KFMS-RC Payment Methods

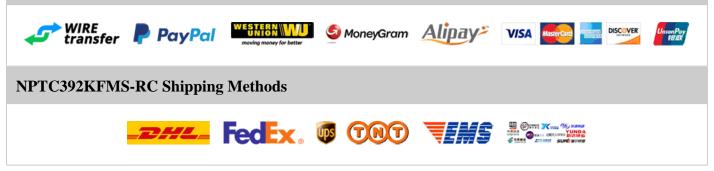

If you have any question about NPTC392KFMS-RC, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com