

PC-28-30

PC-28-30 Information



Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



PC-28-30 Specifications

Manufacturer Part Number PC-28-30 Manufacturer Signal Transformers Category Transformers Package - Package PC Strike PC Type Laminated Core Voltage - Primary ISV Voltage - Secondary (Full Load) Parallel 14V, Series 28V Current - Output (Max) Parallel 60mA, Series 30mA Primary Winding(s) Single Secondary Winding(s) Dual Power - Max I VA Mounting Type Through Hole Yoltage - Isolation Stormer Loady Voltage - Secondary (Full Coad) Stormer Compare Voltage - Secondary (Full Load) Dual Secondary Winding(s) Dual Secondary Winding(s) Dual Power - Max I VA Mounting Type Stormer Loady Youtpe - Solation Stormer Loady Voltage - Isolation Stormer Loady Voltage - Isolation Stormer Loady Voltage - Isolation Stormer Loady <th></th> <th></th>		
CategoryTransformersPower TransformersPower TransformersPackage-SeriesPCTypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 14V, Series 28VCurrent - Output (Max)Parallel 60mA, Series 30mAPrimary Winding(s)SingleSecondary Winding(s)DualCherer TapNoPower - Max1 VAMounting TypeThrough HoleSteiz / DimensionSt.40mm L x 34.92mm WSize / Dimension5.40mm L x 34.92mm WHeight - Seated (Max)1.08mmWeightSito Vrnss	Manufacturer Part Number	PC-28-30
Power TransformersPackage-SeriesPCTypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 14V, Series 28VCurrent - Output (Max)Parallel 60mA, Series 30mAPrimary Winding(s)SingleSecondary Vinding(s)DualCenter TapNoPower - Max1VAMounting TypeThrough HoleSize / DimensionScondaru Sulf AugustSize / DimensionScondaru Sulf AugustHeight - Seated (Max)S100VrmsVoltage - IsolationS100VrmsWeightS101 F(7.121g)	Manufacturer	Signal Transformer
Package-SeriesPCTypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 14V, Series 28VCurrent - Output (Max)Parallel 60mA, Series 30mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - MaxI VAMounting TypePrinary BiologySter / DimensionScondary La Scondary ManageSter / DimensionScondary La Scondary BiologySter / DimensionScondary La Scondary BiologySter / DimensionScondary La Scondary BiologySter / DimensionScondary BiologySter / Di	Category	Transformers
SeriesPCTypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 14V, Series 28VCurrent - Output (Max)Parallel 60mA, Series 30mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max1 VAMounting TypeThrough HoleTermination StyleS240mm L x 34.92mm WSize / Dimension25.40mm L x 34.92mm WVoltage - Isolation1500VrmsWeightS100Vrms		Power Transformers
TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 14V, Series 28VCurrent - Output (Max)Parallel 60mA, Series 30mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max1 VAMounting TypeThrough HoleStez / DimensionS2-40mm Lx 34.92mm WSize / Dimension1.00WrmsVoltage - Isolation500WrmsWeight0.157 1b(71.21g)	Package	-
A115VVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 14V, Series 28VCurrent - Output (Max)Parallel 60mA, Series 30mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max1 VAMounting TypeThrough HoleTermination StyleS2.40mm L x 34.92mm WSize / Dimension1500VrmsHeight - Seated (Max)1500VrmsWoitge - Isolation0.157 lb (71.21g)	Series	PC
Voltage - Secondary (Full Load)Parallel 14V, Series 28VCurrent - Output (Max)Parallel 60mA, Series 30mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max1 VAMounting TypeThrough HoleTermination StyleSc40mm L x 34.92mm WSize / Dimension21.08mmHeight - Seated (Max)1500VrmsWeight0.157 lb (71.21g)	Туре	Laminated Core
Current - Output (Max)Parallel 60mA, Series 30mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max1 VAMounting TypeThrough HoleTermination StyleSc40mm L x 34.92mm WSize / Dimension31.08mmHeight - Seated (Max)1500VrmsWeight0.157 lb (71.21g)	Voltage - Primary	115V
Primary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max1 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension25.40mm L x 34.92mm WHeight - Seated (Max)100VrmsVoltage - Isolation1500VrmsWeight0.157 lb (71.21g)	Voltage - Secondary (Full Load)	Parallel 14V, Series 28V
Secondary Winding(s)DualCenter TapNoPower - Max1 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension25.40mm L x 34.92mm WHeight - Seated (Max)100VrmsVoltage - Isolation1500VrmsWeight0.157 lb (71.21g)	Current - Output (Max)	Parallel 60mA, Series 30mA
Center TapNoPower - Max1 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension25.40mm L x 34.92mm WHeight - Seated (Max)108mmVoltage - Isolation1500VrmsWeight0.157 lb (71.21g)	Primary Winding(s)	Single
Power - Max1 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension25.40mm L x 34.92mm WHeight - Seated (Max)21.08mmVoltage - Isolation1500VrmsWeight0.157 lb (71.21g)	Secondary Winding(s)	Dual
Mounting TypeThrough HoleTermination StylePC PinSize / Dimension25.40mm L x 34.92mm WHeight - Seated (Max)21.08mmVoltage - Isolation1500VrmsWeight0.157 lb (71.21g)	Center Tap	No
Termination StylePC PinSize / Dimension25.40mm L x 34.92mm WHeight - Seated (Max)21.08mmVoltage - Isolation1500VrmsWeight0.157 lb (71.21g)	Power - Max	1 VA
Size / Dimension25.40mm L x 34.92mm WHeight - Seated (Max)21.08mmVoltage - Isolation1500VrmsWeight0.157 lb (71.21g)	Mounting Type	Through Hole
Height - Seated (Max) 21.08mm Voltage - Isolation 1500Vrms Weight 0.157 lb (71.21g)	Termination Style	PC Pin
Voltage - Isolation1500VrmsWeight0.157 lb (71.21g)	Size / Dimension	25.40mm L x 34.92mm W
Weight 0.157 lb (71.21g)	Height - Seated (Max)	21.08mm
	Voltage - Isolation	1500Vrms
Report errors?	Weight	0.157 lb (71.21g)
		Report errors?

PC-28-30 Guarantees

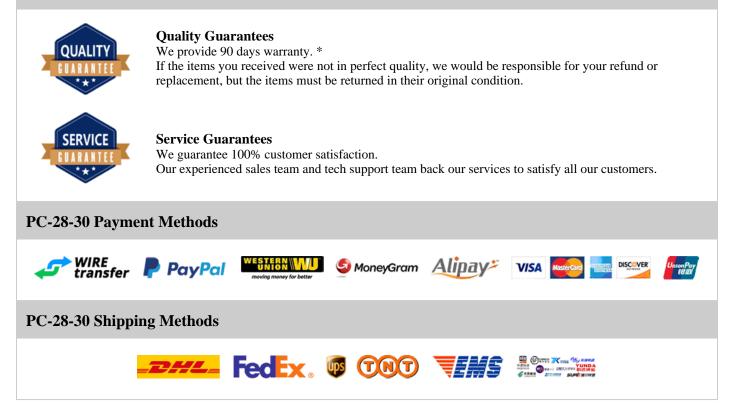

If you have any question about PC-28-30, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com