

PF24-10

PF24-10 Information



| Part Number | PF24-10 | |
|--------------|---|--|
| Manufacturer | Tamura | |
| Category | Transformers Power Transformers | |
| Description | XFRMR SEMI-TORO 24VA THRU HOLE | |
| Package | - | |
| | For the pricing/inventory/lead time, please contact | |
| | us | |
| | Website: https://www.heisener.com | |
| | E-mail: salesdept@heisener.com | |



Request a Quote

For Reference Only

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



PF24-10 Specifications

| Manufacturer Part NumberPF24-10ManufacturerTamuraCategoryTransformersPackage-SeriesPF24TypeSemi-ToroidalVoltage - PrimaryI15V, 230VVoltage - Secondary (Full Load)Parallel 5V, Series 10VCurrent - Output (Max)Parallel 4.8A, Series 2.4APower TansformersDualSecondary Winding(s)DualPower - MaxAVAMounting TypeThrough HoleTermination StylePC PinSize / Dimension31.80mmVoltage - Isolation1500VrmsWeightStorostantWeightSecondary Winding(s) | | |
|--|---------------------------------|----------------------------|
| CategoryTransformersPackage-SeriesPF24TypeSemi-ToroidalVoltage - PrimaryI15V, 230VVoltage - Secondary (Full Load)Parallel 5V, Series 10VCurrent - Output (Max)Parallel 4.8A, Series 2.4APrimary Winding(s)DualSecondary Winding(s)DualPower - Max24 VAPower - MaxPromentAuonting TypePromentSeze / DimensionPC PinSize / Dimension31.80mmHeight - Seated (Max)1500VrmsWeightSoutherstein | Manufacturer Part Number | PF24-10 |
| Power TransformersPackage-SeriesPF24TypeSemi-ToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 5V, Series 10VCurrent - Output (Max)Parallel 4.8A, Series 2.4APrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max24 VAMounting TypeThrough HoleSize / Dimension7.00mm L x 58.00mm WHeight - Seated (Max)31.80mmVoltage - Isolation1500VrmsWeight- | Manufacturer | Tamura |
| Package.SeriesPF24TypeSemi-ToroidalYoltage - Primary115V, 230VVoltage - Secondary (Full Load)Paralel 5V, Series 10VCurrent - Output (Max)Paralel 4.8A, Series 2.4APrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max24 VAMounting TypeThrough HoleSize / Dimension72.00mm Lx 58.00mm WHeight - Seated (Max)31.80mmWeight1500Vrms | Category | Transformers |
| SeriesPF24TypeSemi-ToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 5V, Series 10VCurrent - Output (Max)Parallel 4.8A, Series 2.4APrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max24 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension72.00mm L x 58.00mm WHeight - Seated (Max)31.80mmWeight- | | Power Transformers |
| TypeSemi-ToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 5V, Series 10VCurrent - Output (Max)Parallel 4.8A, Series 2.4APrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max24 VAMounting TypeThrough HoleTermination Style9C PinSize / Dimension7.200mm L x 58.00mm WHeight - Seated (Max)31.80mmWeight- | Package | - |
| PrimePrimeVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 5V, Series 10VCurrent - Output (Max)Parallel 4.8A, Series 2.4APrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max24 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension72.00mm L x 58.00mm WHeight - Seated (Max)31.80mmVoltage - Isolation500Vrms | Series | PF24 |
| Voltage - Secondary (Full Load)Parallel 5V, Series 10VCurrent - Output (Max)Parallel 4.8A, Series 2.4APrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max24 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension72.00mm L x 58.00mm WHeight - Seated (Max)31.80mmVoltage - Isolation1500VrmsWeight- | Туре | Semi-Toroidal |
| Current - Output (Max)Parallel 4.8A, Series 2.4APrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max24 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension72.00mm L x 58.00mm WHeight - Seated (Max)31.80mmVoltage - Isolation1500Vrms | Voltage - Primary | 115V, 230V |
| Primary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max24 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension72.00mm L x 58.00mm WHeight - Seated (Max)1500VrmsVoltage - Isolation500Vrms | Voltage - Secondary (Full Load) | Parallel 5V, Series 10V |
| Secondary Winding(s)DualCenter TapNoPower - Max24 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension72.00mm L x 58.00mm WHeight - Seated (Max)31.80mmVoltage - Isolation1500VrmsWeight- | Current - Output (Max) | Parallel 4.8A, Series 2.4A |
| Center TapNoPower - Max24 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension72.00mm L x 58.00mm WHeight - Seated (Max)31.80mmVoltage - Isolation1500VrmsWeight- | Primary Winding(s) | Dual |
| Power - Max24 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension72.00mm L x 58.00mm WHeight - Seated (Max)31.80mmVoltage - Isolation1500VrmsWeight- | Secondary Winding(s) | Dual |
| Mounting TypeThrough HoleTermination StylePC PinSize / Dimension72.00mm L x 58.00mm WHeight - Seated (Max)31.80mmVoltage - Isolation1500VrmsWeight- | Center Tap | No |
| Termination StylePC PinSize / Dimension72.00mm L x 58.00mm WHeight - Seated (Max)31.80mmVoltage - Isolation1500VrmsWeight- | Power - Max | 24 VA |
| Size / Dimension72.00mm L x 58.00mm WHeight - Seated (Max)31.80mmVoltage - Isolation1500VrmsWeight- | Mounting Type | Through Hole |
| Height - Seated (Max)31.80mmVoltage - Isolation1500VrmsWeight- | Termination Style | PC Pin |
| Voltage - Isolation1500VrmsWeight- | Size / Dimension | 72.00mm L x 58.00mm W |
| Weight - | Height - Seated (Max) | 31.80mm |
| - | Voltage - Isolation | 1500Vrms |
| Report errors? | Weight | - |
| | | Report errors? |

PF24-10 Guarantees

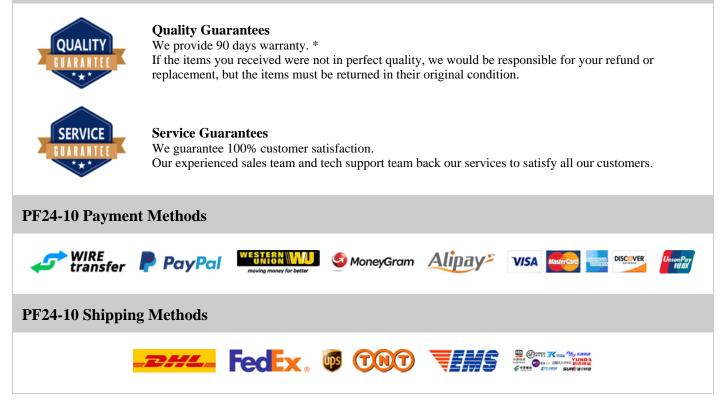

If you have any question about PF24-10, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com