

PF24-30

PF24-30 Information



Part Number	PF24-30
Manufacturer	Tamura
Category	Transformers Power Transformers
Description	XFRMR SEMI-TORO 24VA THRU HOLE
Package	-
	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com



Request a Quote

For Reference Only

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



PF24-30 Specifications

Manufacturer Part Number PF24-30 Manufacturer Tamura Category Transformers Power Transformers Power Transformers Package - Series PF24 Type Semi-Toroidal Voltage - Primary 115V, 230V Voltage - Secondary (Full Load) Parallel 15V, Series 30V Current - Output (Max) Parallel 1.6A, Series 800mA Primary Winding(s) Dual Secondary Winding(s) Dual Power - Max 24 VA Mounting Type Through Hole Termination Style PC Pin Size / Dimension 31.80mm Voltage - Isolation JS0Vrms		
CategoryTransformersPower TransformersPackage-SeriesPF24TypeSemi-ToroidalVoltage - PrimaryI15V, 230VVoltage - Secondary (Full Load)Parallel 15V, Series 30UCurrent - Output (Max)Parallel 1.6A, Series 800mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoNower - Max44 VAMounting TypePringh HoleSize / DimensionPC PinSize / Dimension3180mmHeight - Seated (Max)500VrmsWeightSooversetWeightSooversetSteries (Max)StooversetStore InstructionStooversetStore InstructionStooversetStore InstructionStooversetStore InstructionStooversetStore InstructionStooversetStore InstructionStooversetStoo	Manufacturer Part Number	PF24-30
Power TransformersPackage-SeriesPF24TypeSemi-ToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 15V, Series 30VCurrent - Output (Max)Parallel 1.6A, Series 800mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max24 VAMounting TypeThrough HoleSize / Dimension72.00mm Lx 58.00mm WSize / Dimension31.80mmVoltage - Isolation500VrmsWeightScondary Winding	Manufacturer	Tamura
Package-SeriesPF24TypeSemi-ToroidalVoltage - PrimaryI15V, 230VVoltage - Secondary (Full Load)Parallel 1.6A, Series 300mACurrent - Output (Max)DualPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max24 VAMounting TypeThrough HoleSize / Dimension72.00mm L x 58.00mm WSize / Dimension31.80mmVoltage - Isolation500VrmsWeightSoureWeightSoure	Category	Transformers
SeriesPF24TypeSemi-ToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 15V, Series 30VCurrent - Output (Max)Parallel 1.6A, Series 800mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max24 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension31.80mmHeight - Seated (Max)500VrmsWeight-		Power Transformers
TypeSemi-ToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 15V, Series 30VCurrent - Output (Max)Parallel 1.6A, Series 800mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max24 VAMounting TypePrinaugh HoleSteic / DimensionPC PinSize / Dimension31.80mm WHeight - Seated (Max)500VrmsWeight-	Package	-
Yoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 15V, Series 30VCurrent - Output (Max)Parallel 1.6A, Series 800mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max24 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension31.80mm L x 58.00mm WHeight - Seated (Max)31.80mmWoltage - Isolation1500Vrms	Series	PF24
Voltage - Secondary (Full Load)Parallel 15V, Series 30VCurrent - Output (Max)Parallel 1.6A, Series 800mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max24 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension31.80mm L x 58.00mm WHeight - Seated (Max)1500VrmsWeight-	Туре	Semi-Toroidal
Current - Output (Max)Parallel 1.6A, Series 800mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max24 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension31.80mm L x 58.00mm WHeight - Seated (Max)500VrmsWeight-	Voltage - Primary	115V, 230V
Primary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max24 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension72.00mm L x 58.00mm WHeight - Seated (Max)31.80mmVoltage - Isolation1500Vrms	Voltage - Secondary (Full Load)	Parallel 15V, Series 30V
Secondary Winding(s)DualCenter TapNoPower - Max24 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension72.00mm L x 58.00mm WHeight - Seated (Max)31.80mmVoltage - Isolation1500VrmsWeight-	Current - Output (Max)	Parallel 1.6A, Series 800mA
Center TapNoPower - Max24 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension72.00mm L x 58.00mm WHeight - Seated (Max)31.80mmVoltage - Isolation1500VrmsWeight-	Primary Winding(s)	Dual
Power - Max24 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension72.00mm L x 58.00mm WHeight - Seated (Max)31.80mmVoltage - Isolation1500VrmsWeight-	Secondary Winding(s)	Dual
Mounting TypeThrough HoleTermination StylePC PinSize / Dimension72.00mm L x 58.00mm WHeight - Seated (Max)31.80mmVoltage - Isolation1500VrmsWeight-	Center Tap	No
Termination StylePC PinSize / Dimension72.00mm L x 58.00mm WHeight - Seated (Max)31.80mmVoltage - Isolation1500VrmsWeight-	Power - Max	24 VA
Size / Dimension72.00mm L x 58.00mm WHeight - Seated (Max)31.80mmVoltage - Isolation1500VrmsWeight-	Mounting Type	Through Hole
Height - Seated (Max)31.80mmVoltage - Isolation1500VrmsWeight-	Termination Style	PC Pin
Voltage - Isolation1500VrmsWeight-	Size / Dimension	72.00mm L x 58.00mm W
Weight -	Height - Seated (Max)	31.80mm
-	Voltage - Isolation	1500Vrms
Report errors?	Weight	-
		Report errors?

PF24-30 Guarantees

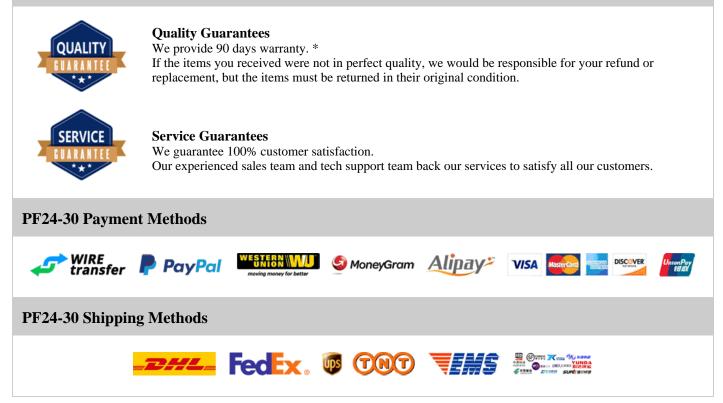

If you have any question about PF24-30, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com